





# Maxiband®

## The Most Sought After Band Heater

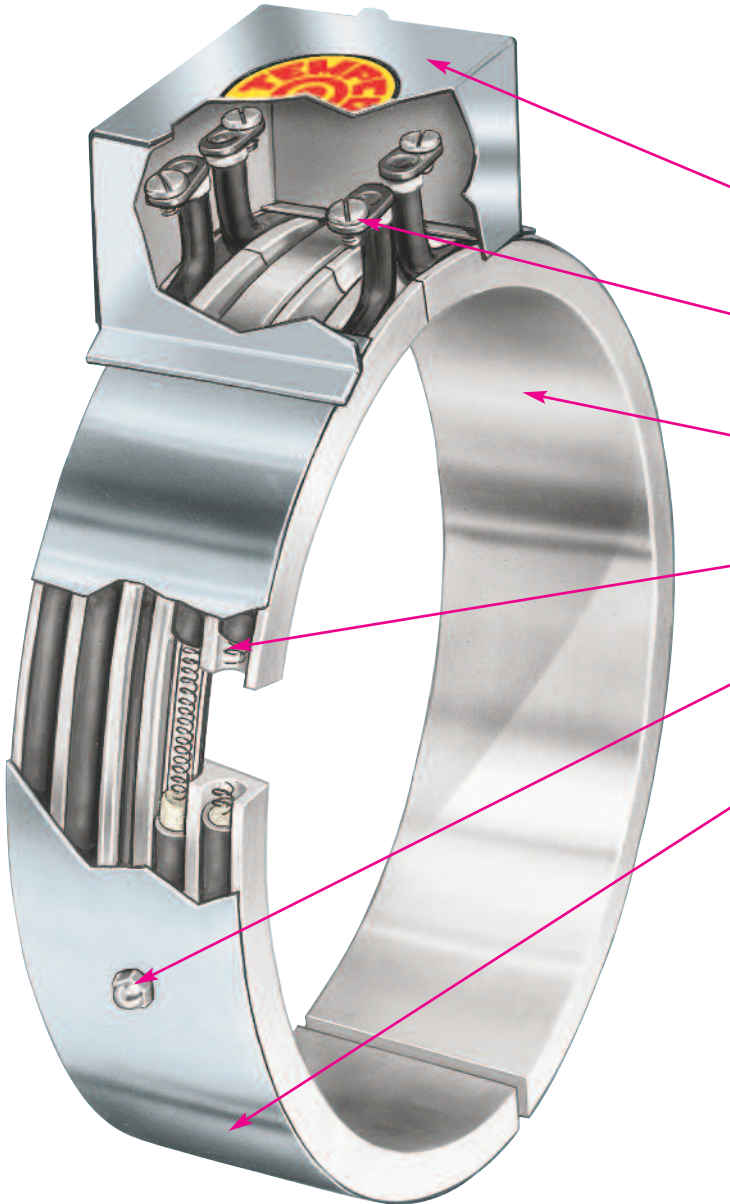

- A** General purpose terminal box offers excellent protection to the exposed terminals. To simplify electrical wiring, the box has two 1/2" trade size knockouts that will accept standard conduit or flexible armor cable connectors.
- B** Right-angle terminal lugs with 10-32 binding head screws provide ease of electrical wiring.
- C** The channels in the specially designed extruded aluminum track have been precisely sized to accept a .315 diameter tubular heating element, and provide an excellent heat sink for rapid heat transfer and good temperature uniformity.
- D** Ruggedly constructed .315 diameter tubular heating elements are the heat source for Maxiband Heaters, providing excellent life and long, trouble-free service.
- E** Crown nuts are located at 90° from the ends that fasten the clamping strap to the aluminum track, keeping the entire assembly together, providing ease of installation.
- F** The strap is made from a Low Thermal Expansion Alloy. It hinges at the terminal end to allow for easy installation. Specially designed mounting brackets with 1/4"-20 socket cap screws, located 180° from the terminal end, provide the clamping force required to tightly draw the heater assembly to the cylinder being heated.

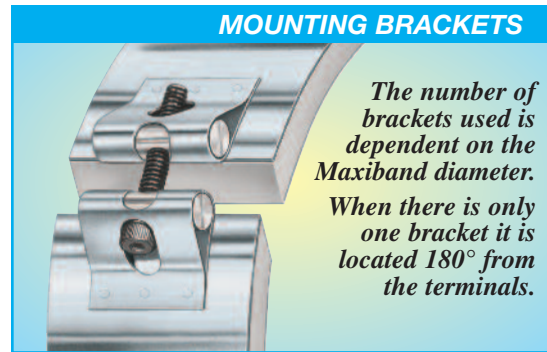

### Typical Maxiband Clamping

