



Power Input

Standard: 90-264 VAC, 47-63 Hz, 15 VA, 7W maximum
Optional: 11-26 VAC / VDC, 15 VA, 7W maximum

Signal Input

Input 1

Resolution: 18 bits **Sampling Rate:** 5 samples / second
Accuracy: ±.24% of span typical
Maximum Rating: -2 VDC minimum, 12 VDC maximum (1 minute for mA input)
Temperature Effect: ±1.5 $\mu\text{V} / ^\circ\text{C}$ for all inputs except mA input ±3.0 $\mu\text{V} / ^\circ\text{C}$ for mA input

Sensor Lead Resistance Effect: T/C: 0.2 $\mu\text{V}/\text{ohm}$
 3-wire RTD: 2.6 $^\circ\text{C}/\text{ohm}$ of resistance difference of two leads
Burn-out Current: 200nA

Common Mode Rejection Ratio (CMRR): 120 dB
Normal Mode Rejection Ratio (NMRR): 55 dB

Sensor Break Detection: Sensor open for TC, RTD and mV inputs; sensor short for RTD input; below 1 mA for 4-20 mA input; below 0.25V for 1-5V input; unavailable for other inputs

Sensor Break Response Time: Within 4 seconds for TC, RTD and mV inputs; 0.1 second for 4-20 mA and 1-5 V inputs

Input 2

Resolution: 18 bits
Sampling Rate: 1.66 times per second
Sensor Break Response Time: 0.5 second
Types: **Current Transducer:** 0 to 50 Amp
mA: -3 to 27 mA **V:** -1.3 to 11.5 VDC

Event Input Functions: Select 2nd setpoint and/or PID, disable output 1 and/or output 2, remote lockout, reset alarm 1 and/or alarm 2


Output 1 or Output 2 / Alarm 2

Relay Rating: 240 VAC, 2 Amp
Pulsed Voltage: Source voltage 5V,
 Current limiting resistance 66 Ω

Linear Output — Characteristics

Type	Zero Tolerance	Span Capacity	Load
4-20 mA	3.6-4.0 mA	20-21 mA	500 Ω max
0-20 mA	0 mA	20-21 mA	500 Ω max
0-5 VDC	0 VDC	5-5.25 VDC	10 K Ω min
1-5 VDC	0.9-1.0 VDC	5-5.25 VDC	10 K Ω min
0-10 VDC	0 VDC	10-10.5 VDC	10 K Ω min

Resolution: 15 bit analog to digital converter
Isolation Breakdown Voltage: 1000 VAC
Solid State Relay (Triac) Output
Rating: 1A / 240 VAC **Inrush Current:** 20A for 1 cycle
Min. Load Current: 50 mA rms
Max. Off-state Leakage: 3 mA rms
Max. On-state Voltage: 1.5 VAC rms
Insulation Resistance: 1000 Megohms minimum at 500 VDC
Dielectric Strength: 2500 VAC for 1 minute

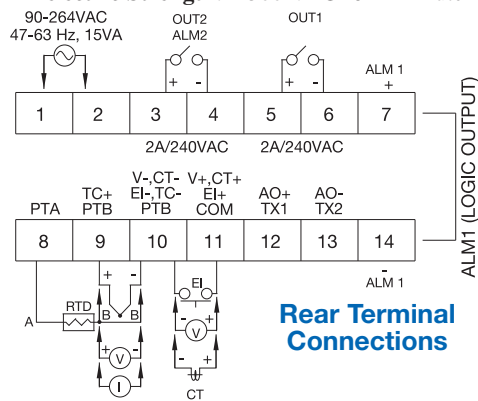

Alarm 1 / Alarm 2

Alarm 1: 5 VDC logic output
Alarm 2 Relay: Form A, (NO) **Maximum rating:** 240 VAC, 2 Amp
Alarm Functions:
 Dwell timer PV1-PV2 High / Low Alarm
 Deviation Band High / Low Alarm Loop Break Alarm
 PV2 High / Low Alarm Sensor Break Alarm
Alarm Mode: Normal, Latching, Hold, Latching / Hold
Dwell Timer: 0 - 6553.5 minutes

Data Communications

Interface: RS-232 (1 unit), RS-485 (up to 247 units)
Protocol: Modbus Protocol – RTU mode

User Interface

Single 4-digit LED Displays: 0.4" / 10 mm **Keypad:** 3 keys
Programming Port: For automatic setup, calibration and testing

Control Mode

Output 1: Reverse (heating) or direct (cooling) action
Output 2: PID cooling control, cooling P band 1-255% of PB
On-Off: 0.1 - 100.0 $^\circ\text{F}$ hysteresis control (P band = 0)
P or PD: 0 - 100.0% offset adjustment
PID: Fuzzy logic modified
Proportional band: 0.1 - 900 $^\circ\text{F}$ (500 $^\circ\text{C}$)
Integral: 0 - 1000 seconds **Derivative:** 0 - 360 seconds

Cycle Time: 0.1 - 100 seconds
Manual Control: Heat (MV1) and Cool (MV2)
Auto-tuning: Cold start and warm start
Failure Mode: Auto-transfer to manual mode with sensor break or A-D converter damage
Ramping Control: 0 - 900 $^\circ\text{F}/\text{min}$ or 0 - 900 $^\circ\text{F}/\text{hr}$ ramp rate
Power Limit: 0 - 100% for output 1 and output 2
Remote Setpoint: Programmable range for voltage or current input
Digital Filter: Time constant: settable from 0.2 to 60 seconds

Analog Retransmission

Analog Retransmission Functions: PV1, PV2, PV1-PV2, PV2-PV1, setpoint, MV1, MV2, PV-SV deviation value
Output Signal: 4-20 / 0-20 mA, 0-1, 0-5, 1-5, 0-10 VDC
Accuracy: ±0.05 % of span, ±0.0025 %/ $^\circ\text{C}$

Environmental and Physical

Operating Temperature: 14 to 122 $^\circ\text{F}$ (-10 to 50 $^\circ\text{C}$)
Storage Temperature: -40 to 140 $^\circ\text{F}$ (-40 to 60 $^\circ\text{C}$)
Humidity: 0 to 90% RH, non-condensing
Dielectric Strength: 2000 VAC, 50/60 Hz for 1 minute
Dimensions: 1-3/64 × 2 × 4-3/8" (26.5 × 50 × 110.5 mm) H×W×D
 Depth behind panel: 3-7/8" (98 mm)
Panel Cutout: 7/8 × 1-25/32" (22 × 45 mm) H×W
Weight: 0.26 lb. (120 grams)

Approval Standards

Safety Standard: UL 3121-1, CSA C22.2 No. 24-93
 EN61010-1 (IEC1010-1)
EMC: EN61325
Protective Class: Front Panel: NEMA 4X / IP65
 Housing and Terminals: IP 20

Stock and Common Part Numbers
(Power Input: 90-264 VAC, w/ alarm 1, no data com)

Part Number	Signal Input	Out 1	Out 2 / Alarm 2	$^\circ\text{F}/^\circ\text{C}$
TEC02001	tc	relay	none	$^\circ\text{F}$
TEC02002	tc	relay	relay	$^\circ\text{F}$
TEC02003	tc	4-20 mA	none	$^\circ\text{F}$
TEC02004	tc	4-20 mA	relay	$^\circ\text{F}$
TEC02005	tc	DC pulse	none	$^\circ\text{F}$
TEC02006	tc	relay	none	$^\circ\text{C}$
TEC02007	tc	4-20 mA	none	$^\circ\text{C}$
TEC02008	tc	DC pulse	none	$^\circ\text{C}$