



Model TEC-920 1/16 DIN Temperature Controller



Single Display, Configurable for 2 Programmable Outputs!

Design Features

- * 1/16 DIN size – 48 mm × 48 mm
- * Fuzzy Logic PID heat and cool control
- * PID Control – Auto-tuning on cold or warm start
- * Short panel depth – only 3-3/8" (86 mm) required
- * Universal programmable sensor input
- * Highly versatile – 6 types of inputs available
- * Output 2 can be programmed as output or alarm
- * Universal input power – 90-250 VAC or 11-26 VAC/VDC
- * Highly accurate universal input with 18 bit analog to digital converter
- * Bumpless transfer to manual mode during sensor failure
- * Wide variety of alarm mode selections
- * Optional RS-485 communications interface
- * Bright 0.40" (10 mm) LED display
- * High performance at a very low price

Agency Approvals:



Hardware Code: TEC-920-

A Part Number based on the hardware code and any software pre-programming will be issued at time of order.

Standard lead time is stock to 2 weeks.

Power Input BOX 1

- 4** = 90-250 VAC
- 5** = 11-26 VAC / VDC
- 9** = Other

Signal Input – Universal, can be programmed in the field for item 5 or 6 BOX 2

- 5** = Thermocouple: *J, K, T, E, B, R, S, N, L
0-60mV
- 6** = RTD: *PT100 DIN, PT100 JIS
- 7** = 0-1 VDC
- 8** = *0-5, 1-5 VDC
- A** = 0-10 VDC
- B** = *4-20, 0-20 mA
- 9** = Other * indicates default value

Output 1 BOX 3

- 1** = Relay: 2A / 240 VAC
- 2** = Pulse DC for SSR drive: 5 VDC (30 mA max)
- 3** = Isolated, 4-20 mA (default), 0-20 mA
- 4** = Isolated, VDC, 1-5 (default), 0-5, 0-1
- 5** = Isolated, VDC, 0-10
- 6** = Triac-SSR output 1A / 240 VAC
- C** = Pulse DC for SSR drive: 14 VDC (40 mA max)
- 9** = Other

Output 2 / Alarm 1 BOX 4

- 0** = None
- 1** = Relay: 2A / 240 VAC
- 2** = Pulse DC for SSR drive: 5 VDC (30 mA max)
- 3** = Isolated, 4-20 mA (default), 0-20 mA
- 4** = Isolated VDC, 1-5 (default), 0-5, 0-1
- 5** = Isolated VDC, 0-10
- 6** = Triac-SSR output 1A / 240 VAC
- 7** = RS-485 Data Interface
- 8** = Isolated 20V @ 25 mA DC, Output Power Supply
- A** = Isolated 12V @ 40 mA DC, Output Power Supply
- 9** = Isolated 5V @ 80 mA DC, Output Power Supply
- C** = Pulse DC for SSR drive: 14 VDC (40 mA max)
- B** = Other



Note: Detailed information on features common to digital microprocessor-based TEC temperature controls and the complete Table of Input Range and Accuracy can be found on page 13-46.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.



Power Input

Standard: 90-250 VAC, 47-63 Hz, 10 VA, 5W maximum
Optional: 11-26 VAC / VDC, 10 VA, 5W maximum

Signal Input

Resolution: 18 bits **Sampling Rate:** 5 samples / second
Accuracy: $\pm 0.24\%$ of span typical
Maximum Rating: -2 VDC minimum, 12 VDC maximum (1 minute for mA input)
Temperature Effect: $\pm 1.5 \mu\text{V} / ^\circ\text{C}$ for all inputs except mA input
 $\pm 3.0 \mu\text{V} / ^\circ\text{C}$ for mA input
Sensor Lead Resistance Effect: T/C: $0.2 \mu\text{V}/\text{ohm}$
 3-wire RTD: $2.6^\circ\text{C}/\text{ohm}$ of resistance difference of two leads
Burn-out Current: 200nA
Common Mode Rejection Ratio (CMRR): 120 dB
Normal Mode Rejection Ratio (NMRR): 55 dB
Sensor Break Detection: Sensor open for TC, RTD and mV inputs; sensor short for RTD input; below 1 mA for 4-20 mA input; below 0.25V for 1-5V input; unavailable for other inputs
Sensor Break Response Time: Within 4 seconds for TC, RTD and mV inputs; 0.1 second for 4-20 mA and 1-5 V inputs

Output 1 / Output 2

Relay Rating: 240 VAC, 2 Amp
Pulsed Voltage: Source voltage 5V, Current limiting resistance 66 Ω

Linear Output — Characteristics

Type	Zero	Span	Load
Tolerance	Tolerance	Capacity	
4-20 mA	3.6-4.0 mA	20-21 mA	500 Ω max
0-20 mA	0 mA	20-21 mA	500 Ω max
0-5 VDC	0 VDC	5-5.25 VDC	10 K Ω min
1-5 VDC	0.9-1.0 VDC	5-5.25 VDC	10 K Ω min
0-10 VDC	0 VDC	10-10.5 VDC	10 K Ω min

Resolution: 15 bit analog to digital converter
Output Regulation: 0.02% for full load change
Output Settling Time: 0.1 sec. (stable to 99.9%)
Isolation Breakdown Voltage: 1000 VAC
Temperature Effect: $\pm 0.01\%$ of span/ $^\circ\text{C}$

Solid State Relay (Triac) Output

Rating: 1A / 240 VAC
Inrush Current: 20A for 1 cycle
Min. Load Current: 50 mA rms
Max. Off-state Leakage: 3 mA rms
Max. On-state Voltage: 1.5 VAC rms
Insulation Resistance: 1000 Megohms minimum at 500 VDC
Dielectric Strength: 2500 VAC for 1 minute

Output 2 / Alarm 1 — Programmable

Alarm 1 Relay: Form A, (NO)
 Maximum rating: 240 VAC, 2 Amp

Alarm Functions: Dwell timer
 Deviation High / Low Alarm
 Deviation Band High / Low Alarm
 Process High / Low Alarm
 Sensor Break Alarm

Alarm Mode: Normal, Latching, Hold, Latching / Hold
Dwell Timer: 0 - 4553.6 minutes

Interface: RS-485 (up to 247 units)

Protocol: Modbus Protocol – RTU mode
Address: 1-247 **Baud Rate:** 0.3 - 38.4 Kbits/sec
Data Bits: 7 or 8 bits **Parity Bit:** None, Even or Odd
Stop Bit: 1 or 2 bits **Communication Buffer:** 160 bytes

User Interface

Single 4-digit LED Displays: 0.4" / 10 mm **Keypad:** 4 keys
Programming Port: For automatic setup, calibration and testing

Control Mode

Output 1: Reverse (heating) or direct (cooling) action
Output 2: PID cooling control, cooling P band 50-300% of PB, dead band -36.0 to 36.0% of PB
On-Off: 0.1 - 90.0 $^\circ\text{F}$ hysteresis control (P band = 0)
P or PD: 0 - 100.0% offset adjustment
PID: Fuzzy logic modified
Proportional band: 0.1 - 900 $^\circ\text{F}$
Integral time: 0 - 1000 seconds
Derivative time: 0 - 360 seconds

Cycle Time: 0.1 - 90 seconds

Manual Control: Heat (MV1) and Cool (MV2)

Auto-tuning: Cold start and warm start

Failure Mode: Auto-transfer to manual mode with sensor break or A-D converter damage

Ramping Control: 0 - 900 $^\circ\text{F}/\text{min}$ or 0 - 900 $^\circ\text{F}/\text{hr}$ ramp rate

Environmental and Physical

Operating Temperature: 14 to 122 $^\circ\text{F}$ (-10 to 50 $^\circ\text{C}$)

Storage Temperature: -40 to 140 $^\circ\text{F}$ (-40 to 60 $^\circ\text{C}$)

Humidity: 0 to 90% RH, non-condensing

Dielectric Strength: 2000 VAC, 50/60 Hz for 1 minute

Dimensions: 1-7/8 \times 1-7/8 \times 3-3/4" (48 \times 48 \times 94 mm) H \times W \times D
 Depth behind panel: 3-3/8" (86 mm)

Panel Cutout: 1-25/32 \times 1-25/32" (45 \times 45 mm) H \times W

Weight: 0.31 lb. (140 grams)


Approval Standards

Safety: UL61010C-1, CSA C22.2 No. 24-93
 EN61010-1 (IEC1010-1)

EMC: EN61326

Protective Class: Front Panel: IP30
 Housing and Terminals: IP 20

Rear Terminal Connections

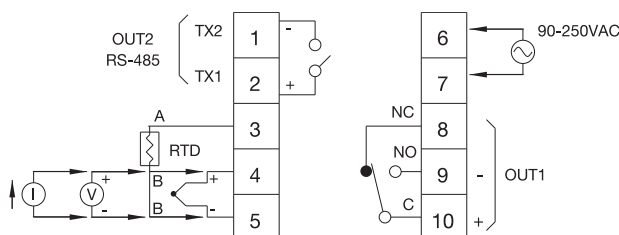

Stock and Common Part Numbers (Power Input: 90-250 VAC)

Part Number	Signal Input	Out 1	Out 2 / Alarm1
TEC15001	tc	relay	none
TEC15002	tc	relay	relay
TEC15003	tc	4-20 mA	none
TEC15004	tc	DC pulse	none
TEC15005	RTD	relay	none
TEC15006	RTD	DC pulse	none
TEC15007	RTD	DC pulse	relay