




Surface Thermocouples

Wire Thermocouples

* An economical insulated wire thermocouple with exposed junction

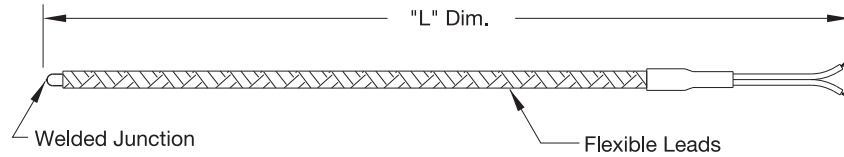

Ordering Code: **TWW** -

Wire Size BOX 1

- 1** = 30 ga. Solid
- 2** = 24 ga. Solid
- 3** = 24 ga. Stranded
- 4** = 20 ga. Solid
- 5** = 20 ga. Stranded
- X** = Other (Specify)

Calibration BOX 2

ANSI Standard Tolerances **J K E T**

"L" Dimension BOX 3

Whole inches
Example: Enter **048** for 48 inches

Lead Insulation BOX 4

Fiberglass 900°F (482°C) **S** **B**
Teflon® 400°F (204°C) **T** **D**
w/ SS Overbraid

Termination BOX 5 †

B = 2-1/2 in. Split Leads **P** = Standard Plug **D** = Miniature Plug
S = Spade Lugs **J** = Standard Jack **E** = Miniature Jack
C = Spade Lugs with BX Conn. **K** = Standard Plug and Jack **F** = Mini. Plug and Jack
X = Other (Specify)

Special Requirements BOX 6

X = Specify
0 = None

† See page 14-9 for Termination Style descriptions

Magnet Thermocouples



* This 1-1/4" dia. 6-pole magnet thermocouple can be attached to magnetic surfaces and walls with a holding force of 25 lbs. Magnet may lose some of the holding force above 750°F (400°C).

Ordering Code: **TMW** -

Calibration BOX 1

ANSI Standard Tolerances **J K E T N**

Lead Wire Length BOX 2

Whole inches
Example: Enter **048** for 48 inches

Lead Insulation BOX 3

Fiberglass 900°F (482°C) **S** **B**
Teflon® 400°F (204°C) **T** **D**
w/ SS Overbraid

Termination BOX 4 †

B = 2-1/2 in. Split Leads **P** = Standard Plug **D** = Miniature Plug
S = Spade Lugs **J** = Standard Jack **E** = Miniature Jack
C = Spade Lugs with BX Conn. **K** = Standard Plug and Jack **F** = Mini. Plug and Jack
X = Other (Specify)

Special Requirements BOX 5

X = Specify
0 = None

† See page 14-9 for Termination Style descriptions

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

View Product Inventory @ www.tempco.com




Optional Thermocouple Termination Styles

Optional Termination Styles


Available for the following thermocouples:

Style	Page
TTW	14-2
TCP	14-3 through 14-5
TRW	14-6
TSW	14-6
TPW	14-7
TNW	14-7
TWW	14-8
TMW	14-8
MTA1	14-15


Style B—Plain Ends




Style S—Spade Lugs




Style C—Spade Lugs with BX connector




Style P—Standard Plug




Style J—Standard Jack



Style D—Miniature Plug



Style E—Miniature Jack



Thermocouple Extension Assemblies

Termination 1

Termination 2




Jack to Plug

Termination 1


Termination 2




BX Connector to BX Connector




Plug to Plug



BX Connector to Plug



Jack to Jack



BX Connector to Jack

Ordering Information

ECA Thermocouple Extension Assemblies are offered with the options listed in the worksheet below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

Ordering Code: **ECA** -

Termination 1 & 2 BOX 1 & 2 †

S = Spade Lugs **B** = 2-1/2 in. Split Leads
C = Spade Lugs with BX Conn. **D** = Miniature Plug
P = Standard Plug **E** = Miniature Jack
J = Standard Jack **X** = Other (Specify)

Calibration BOX 3

ANSI Standard Tolerances **J K E T N**

† See above for Termination Style descriptions

"L" Dimension BOX 4

Whole inches **006** to **999**

Lead Insulation BOX 5

	Standard	w/ SS Overbraid	w/ SS Armor Cable
Fiberglass 900°F (482°C)	S	B	A
Teflon® 400°F (204°C)	T	D	F

Special Requirements BOX 6

X = Specify
0 = None

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

(800) 323-6859 • Email: sales@tempco.com