






### LDA In-Line Forced Air & Gas Heating — Stainless Steel Inlet Fitting

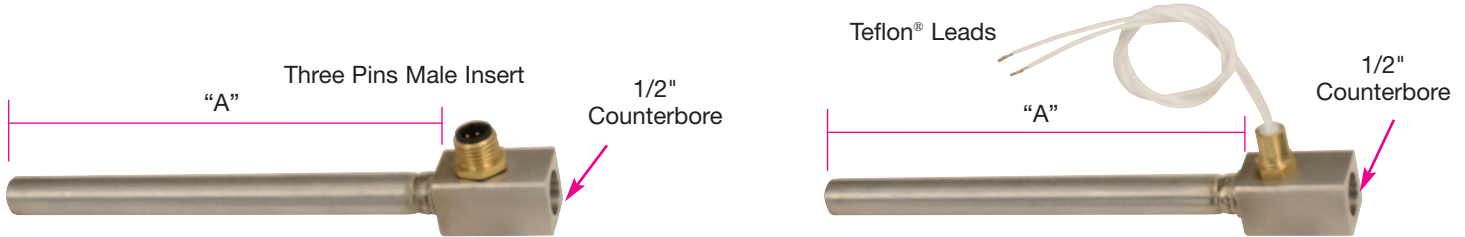


#### Standard (Non-Stock) In-Line Air Process Heaters

Diameter	"A" in (mm)	Watts	Volts	Connection	Part Number
.500	5½ 139.7	400	120	3 Pins Male Insert	LDA00194
.500	5½ 139.7	400	240	3 Pins Male Insert	LDA00196
.500	5½ 139.7	600	120	3 Pins Male Insert	LDA00197
.500	5½ 139.7	600	240	3 Pins Male Insert	LDA00198
.500	5½ 139.7	400	120	36" Leads	LDA00195
.500	5½ 139.7	400	240	36" Leads	LDA00199
.500	5½ 139.7	600	120	36" Leads	LDA00200
.500	5½ 139.7	600	240	36" Leads	LDA00201

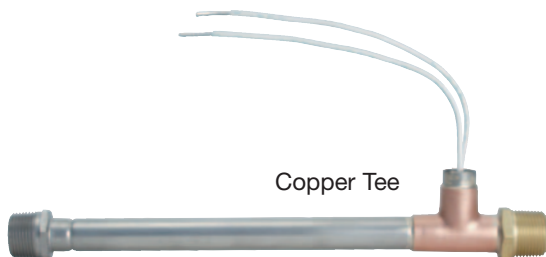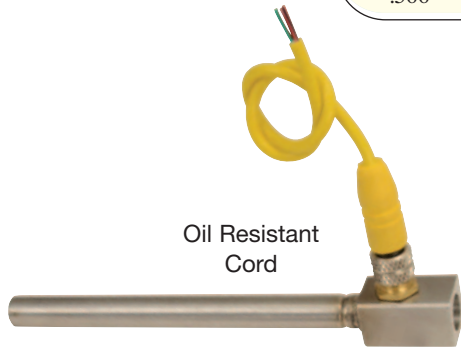

#### Optional Features

- \* Other wattages and voltages
- \* Other diameters or lengths
- \* 1/8", 1/4", and 3/8" NPT male or female threads are available for the inlet and outlet fittings
- \* External MI cable thermocouple
- \* Other custom made fittings or flanges
- \* S/S cable or braid for lead wire protection
- \* SJO cord
- \* Explosion proof box

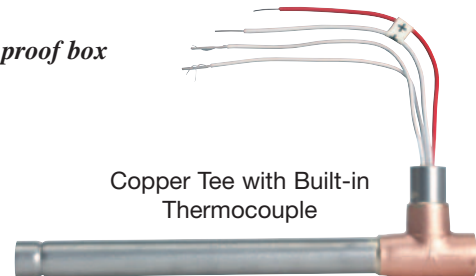

#### Ordering Information

##### Custom Engineered/Manufactured Heaters

For sizes and ratings not listed, **TEMPCO** will design and manufacture an LDA In-Line heater to meet your requirements.

**Please Specify** the following:

- |   |  |
|---|--|
| <input type="checkbox"/> Diameter                   | <input type="checkbox"/> Optional Thermocouple |
| <input type="checkbox"/> Inlet-Outlet size and type | <input type="checkbox"/> Pressure              |
| <input type="checkbox"/> "A" Dimension              | <input type="checkbox"/> Exit Temperature      |
| <input type="checkbox"/> Lead Lengths and Type      | <input type="checkbox"/> Special Requirements  |
| <input type="checkbox"/> Wattage and Voltage        |  |

##### Catalog Heaters

Order by Part Number for catalog heaters.

**Standard lead time is 2-3 weeks.**

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).