


Hi-Density

CARTRIDGE HEATER FEATURES



A The standard termination for Hi-Density Cartridge Heaters is Type N, 10" (254 mm) long nickel conductor lead wires externally connected to 1-1/4" (32 mm) solid conductor terminal pins. The lead wires have fiberglass insulation and are UL approved for temperatures up to 482°F (250°C). Mica insulated UL approved wires for temperatures up to 842°F (450°C) are optional.

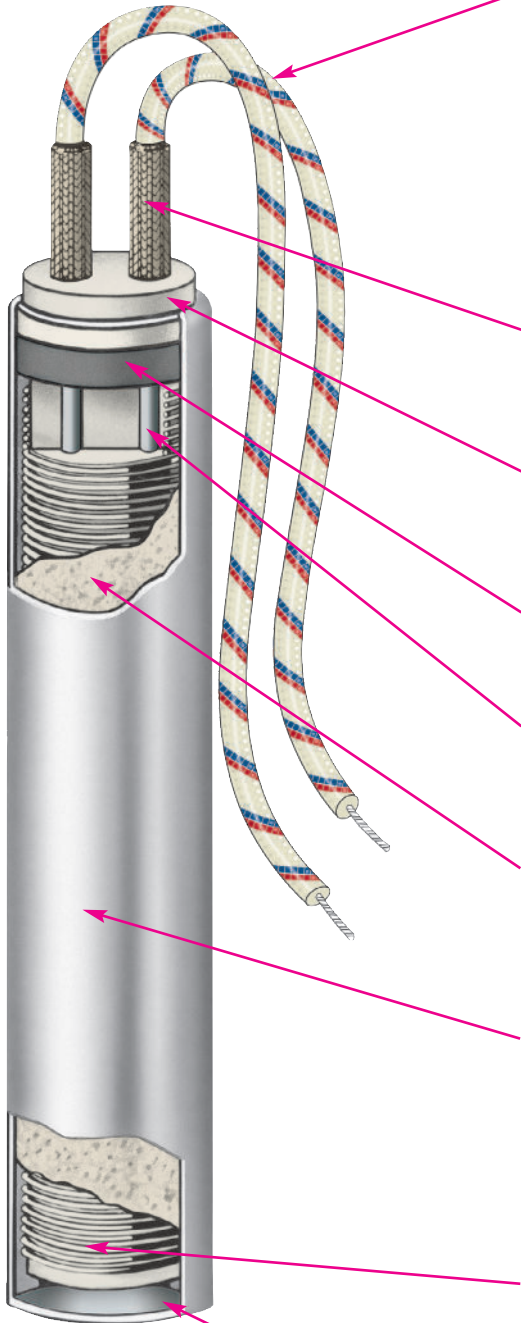

Note: To meet the requirements of your application we offer over 40 standard termination styles to select from that will solve many of the most common application problems. See pages 2-39 through 2-60.

B Silicone rubber coated fiberglass sleeve provides maximum electrical insulation to the crimp connector used to splice the nickel conductors to the flexible leads and is rated up to 392°F (200°C).

C Ceramic end cap prevents nickel conductors from shorting out against sheath when sharp bending of the leads is required. The ceramic cap may be eliminated in some cases to optimize the heater watt density.

D Ceramic end cap and swaged-in lava plug protect the internal cartridge from outer contamination. Other types of seals can also be provided.

E Solid conductor terminal pins are used to ensure a good electrical connection between the nickel conductor lead wires and the resistance wire. They are sized for the maximum current rating of the heater.

F A high purity Magnesium Oxide (MgO) powder consisting of custom grain sizes is used to fill all remaining space inside the sheath. Heater is then swaged, which compacts the magnesium oxide grains into a solid mass, thereby increasing thermal conductivity and dielectric strength.

G Standard sheath material is 321 Stainless Steel. It provides high temperature strength up to 1200°F (650°C), good thermal conductivity, and resistance to corrosion and scaling. Alloy 321 is a Nickel-Chromium Stainless Steel modified with the addition of Titanium. For higher operating temperatures up to 1400°F (760°C) or corrosive immersion heating applications, Incoloy® 800 is available. Consult Tempco for other sheath materials.

H Grade "A" Nickel-Chrome resistance wire precisely wound on a high purity magnesium oxide core places the resistance wire as close to the inside of the sheath as possible while maintaining dielectric strength. This provides excellent heat transfer and long heater life with the highest possible watt densities.

I Welded end disc made from the same material as the sheath provides a positive seal against moisture and other contaminants.




Hi-Density Cartridge Heaters are UL recognized and CSA certified in many design variations under UL File Number E65652 and CSA File Number 043099.

If you require UL and/or CSA Agency Approval, please specify when ordering.

TEMPCO Offers the Most Comprehensive and Diverse Selection in Hi-Density Cartridge Heaters

Since Their Introduction in 1972, Hi-Density Cartridge Heaters Have Evolved and Today Offer a Multitude of Diverse Product Options:

1. **(HDC)** A Hi-Density cartridge heater in US sizes (see page 2-4).
2. **(HDM)** A Hi-Density cartridge heater in Metric sizes (see page 2-28).
3. **(HDP)** Pennybottom™, A Hi-Density cartridge heater with a Built-in Thermocouple and Flat Copper end disc. (see page 2-24).
4. **(HDL)** A Hi-Density cartridge heater designed with NPT Fittings for Immersion heating (see page 2-23).
5. **(HDB)** Bolt Heater, A Hi-Density cartridge heater designed for assisting in the assembly of large machinery (see page 2-61).

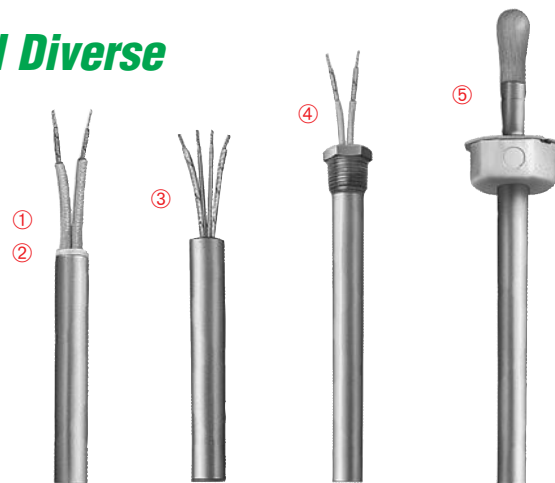

Hi-Density Cartridge Heaters provide maximum processing temperature capability

- * Higher watt densities permit smaller heaters to be used without sacrificing life expectancy. This results in up-front as well as long-term cost savings.
- * Swaged construction provides maximum support for the resistance wire and excellent heat transfer characteristics, improving the overall life expectancy of the cartridge heater.
- * Termination styles and special features allow customization to any application.
- * Applications up to 1400°F (760°C)

Typical Applications

- ✦ Plastic Extruders
- ✦ Hot Runner Molds
- ✦ Hot Stamping
- ✦ Medical Equipment
- ✦ Packaging Equipment
- ✦ Molds
- ✦ Aerospace
- ✦ Sealing Bags
- ✦ Semi-Conductor
- ✦ Plastic Molding
- ✦ Shoe Machinery
- ✦ Food Processing
- ✦ Heating Gases and Liquids
- ✦ Glue Guns
- ✦ Laminating Presses
- ✦ Platens
- ✦ Scientific Equipment
- ✦ Food Service Equipment

Hi-Density Cartridge Heaters are Classified in Two Distinct Categories

Multi-Purpose Use

The Multi-Purpose Use Cartridge Heaters represent Tempco's commitment to value-added customer service as we maintain in Stock over 65,000 Semi-Finished Hi-Density Cartridge Heater Substrates, offering a combination of over 1000 sizes in industry standard diameters and lengths ranging from 1" (25.4 mm) to 36" (914.4 mm) in a complete spectrum of wattages and operating voltages. Multi-Purpose Use Cartridge Heaters are the solution for a multitude of original equipment manufacturers (OEMs) or maintenance (MRO) applications.

Available through the Terminator Program.

Complete details are found on pages 2-12 through 2-21.

Highly Engineered Specific Purpose Use

Tempco has been at the forefront of addressing the challenges of Original Equipment Manufacturers (OEMs) in a broad segment of diversified industries. As a company we are uniquely qualified and committed to providing value-added expertise in engineering and manufacturing capabilities that span over three decades of acquired knowledge, assisting customers in developing highly engineered specific use cartridge heaters for dependable and reliable performance. Let us provide the optimal solution to your thermal loop system and cartridge heater design challenges. Engineering assistance can be found on pages 2-5 through 2-7.

Consult Us With Your Requirements.

We Welcome Your Inquiries.

Ordering Information

**Custom
Manufactured**



Custom Engineered/Manufactured Heaters

Because an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Hi-Density Cartridge Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:

- | | |
|-----------------------------------|--|
| <input type="checkbox"/> Diameter | <input type="checkbox"/> Termination types (see pages 2-39 through 2-60) |
| <input type="checkbox"/> Length | <input type="checkbox"/> Lead Length |
| <input type="checkbox"/> Wattage | <input type="checkbox"/> Cable/Braid length |
| <input type="checkbox"/> Voltage | <input type="checkbox"/> Special Features |
| | <input type="checkbox"/> Application Type |
| | <input type="checkbox"/> Operating Temperature |

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

(800) 323-6859 • Email: sales@tempco.com

Cartridge Heaters



Standard Specifications

Hi-Density Cartridge Heater Specifications

PERFORMANCE RATINGS

Max. Temperature: *1400°F (760°C)

Max. Watt Density: 100-300 W/in² (15.5-46.5 W/cm²)
depending on heater size & operating temperature.

NOTE: The maximum operating temperature and the life expectancy of a cartridge heater is dependent on two main factors:

1. The maximum recommended sheath temperature
(*1200°F for a standard heater)

2. The maximum ambient temperature for the termination selected.

Consult Tempco if you require a recommendation for your application.

DIMENSIONAL SPECIFICATIONS

| Nominal Diameter | 1/4" | | 5/16" | | 3/8" | | 1/2" | | 5/8" | | 3/4" | | 1" | |
|---|--|---------|-------------|---------|-------------|---------|-------------|---------|-------------|---------|------------|---------|------------|---------|
| | in | (mm) | in | (mm) | in | (mm) | in | (mm) | in | (mm) | in | (mm) | in | (mm) |
| Actual Diameter | .246 | (6.25) | .308 | (7.82) | .371 | (9.42) | .496 | (12.60) | .621 | (15.77) | .746 | (18.95) | .996 | (25.30) |
| Diameter Tolerance | ±.002 | (.051) | ±.002 | (.051) | ±.002 | (.051) | ±.002 | (.051) | ±.002 | (.051) | ±.003 | (.076) | ±.003 | (.076) |
| Minimum Length | 1 | (25.40) | 1 | (25.40) | 1 | (25.40) | 1 | (25.40) | 1 | (25.40) | 1-1/4 | (31.75) | 1-3/4 | (44.45) |
| Maximum Length | 36 | (914) | 36 | (914) | 48 | (1219) | 60 | (1524) | 72 | (1829) | 72 | (1829) | 72 | (1829) |
| Length Tolerance | ±3/32 (2.4) | | ±3/32 (2.4) | | ±3/32 (2.4) | | ±3/32 (2.4) | | ±3/32 (2.4) | | ±1/8 (3.2) | | ±1/8 (3.2) | |
| | Heaters up to 5" (127 mm) ±2% of Sheath Length Heaters over 5" (127 mm) | | | | | | | | | | | | | |
| Camber Tolerance Heaters up to 6" (152 mm) long | 0.005" (0.127 mm) | | | | | | | | | | | | | |
| Camber Tolerance Heaters over 6" (152 mm) long | 0.020" (0.508 mm) per foot of length (0.020 x (length in feet) ²) | | | | | | | | | | | | | |

A certain amount of Camber is unavoidable.

With a slight force, Hi-Density Cartridge Heaters will flex enough to fit into a straight reamed hole.

ELECTRICAL SPECIFICATIONS

| Nominal Diameter | 1/4" | 5/16" | 3/8" | 1/2" | 5/8" | 3/4" | 1" |
|--|--------------------|-------|------|------|--------|--------|--------|
| Maximum Voltage | 240 | 240 | 240 | 240 | 480* | 480* | 480* |
| Maximum Amperage (see next line for exceptions) | 4.4 | 4.5 | 6.7 | 10.5 | 23 | 23 | 23 |
| †Maximum Amperage for Types C1C, C1D, C2C, C2D, CS, F, M3, R1B, S1, S2, SA, W & W3 Terminations | 3.0 | 3.0 | 5.5 | 7.6 | 9.7 | 9.7 | 9.7 |
| Minimum Wattage at 120V on a 1" long Heater | 50 | 45 | 45 | 50 | 50 | — | — |
| Minimum Wattage at 120V on a 2" long Heater | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Maximum Wattage at 120V | 525 | 540 | 800 | 1260 | 2760 | 2760 | 2760 |
| Maximum Wattage at 240V | 1050 | 1080 | 1600 | 2520 | 5520 | 5520 | 5520 |
| Maximum Wattage at 480V | — | — | — | — | 11,000 | 11,000 | 11,000 |
| Wattage Tolerance | Plus 5%, Minus 10% | | | | | | |
| Resistance Tolerance | Plus 10%, Minus 5% | | | | | | |

†Current carrying capacities are for ambient temperatures up to 482°F (250°C) with mica insulated lead wires.

*480V when applicable. Consult Tempco.

TEMPERATURE COEFFICIENT OF RESISTANCE

The electrical resistance (ohms) of the heater resistance wire increases with temperature rise.

Tempco standard Hi-Density Cartridge Heaters are manufactured with ohms (cold ohms) 3.3% lower than the actual calculated ohms (hot ohms) to compensate for this increase.



Note: For Miniature Cartridge Heater Specifications in 1/8", 5/32" and 3/16" diameters, see page 2-10.

LENGTH TOLERANCE FOR: - LEAD WIRES - WIRE BRAID LEADS - ARMOR CABLE LEADS

Up to 36": -1/2", +1" (-12.7 mm, +25.4 mm)
36" to 72": -1", +2" (25.4 mm, +50.8 mm)
Above 72": ±4" (101.6 mm)



Note: Specifications detailed on this page are standard. Consult Tempco if your application requires tighter tolerances or has other special requirements.

AVAILABLE ELECTRICAL FEATURES

| Diameter | Dual Volts | 3-Phase | Dual Circuits | Multiple Heat Zones (maximum 3 zones) |
|----------|------------|---------|---------------|---------------------------------------|
| 1/4" | No | No | No | No |
| 5/16" | No | No | No | No |
| 3/8" | Yes* | No | No | Yes* |
| 1/2" | Yes* | Yes | Yes | Yes* |
| 5/8" | Yes | Yes | Yes | Yes |
| 3/4" | Yes | Yes | Yes | Yes |
| 1" | Yes | Yes | Yes | Yes |

Consult factory for maximum wattages and voltages.

* Heaters may require a larger diameter transition area at lead end.

[View Product Inventory @ www.tempco.com](http://www.tempco.com)

Recommendations for Improving the Life of Hi-Density Cartridge Heaters

Tempco Hi-Density Cartridge Heaters have been widely used in many demanding and diverse applications since 1972. The commonly used basic applications are platen, plastic mold and die heating, liquid immersion and air heating.



Note: Selection of the wrong termination for a particular application is the primary reason for all heater failures. However, failure to consider other important criteria can also have a negative effect on the life of the heater. To get the best performance and assure long life, it is important to carefully evaluate the following factors.

Operating Temperature

Operating temperature of a heater is a major factor in determining the life expectancy of a heating element. The heater life depends on the actual temperature of the resistance wire within the heater and not on the process operating temperature. The graph in Fig. 1 demonstrates the proper relationship between operating temperature and watt density; the higher the operating temperature, the lower the maximum recommended watt density.

Heater Watt Density

Cartridge heater watt density is defined as the wattage dissipated per square inch of the heated sheath surface. For a particular application a heater's watt density governs internal resistance wire temperature, which determines the outer sheath temperature. These factors are critical to the proper heating of the application and to the life expectancy of the heater. Special construction features that promote excellent heat transfer permit Hi-Density Cartridge Heaters to operate at higher watt densities while maintaining the lowest possible resistance wire temperatures of any style cartridge heater.

Heater watt density (w/in^2) is calculated using the following formula:

$$\text{Watt Density} = \frac{\text{Heater wattage}}{\text{Heated length} \times \text{Heater diameter} \times 3.1416}$$


Heated length is the overall length of the heater minus any unheated (cold) sections. Standard Type N, Hi-Density cartridge heaters have 3/8" at the lead end and 1/4" at the disc end unheated. This would mean a 6" long heater would have 5-3/8" effective heated length. Unheated sections vary with type of heater termination. For descriptions of terminations and options, see pages 2-39 through 2-60.

The graph in Fig. 1 shows the maximum recommended watt density for Hi-Density Cartridge Heaters when used in a steel platen. Watt density limitations for various materials are given in the engineering section of this catalog. For liquid immersion heaters the maximum watt density depends on the type of liquid being heated. The more viscous, or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure. It is advisable to use heaters that have watt densities below the maximum recommended watt density to get the longest heater life. If the actual heater watt density is close to the maximum recommended watt density, you can correct the problem by:

1. Increasing the number, diameter and length of heaters.
2. Lowering the total wattage; however, this may increase the heat-up time.
3. Obtaining tighter fit (see Fig. 2 — Determining Fit).


A Hi-Density cartridge heater designed at the maximum recommended watt density allows the smallest heater to be used to obtain the required wattage with good service life. All things being equal, using a lower watt density heater will typically provide optimized service life.

FIG. 1
Recommended Watt Density for Heating Metal Parts

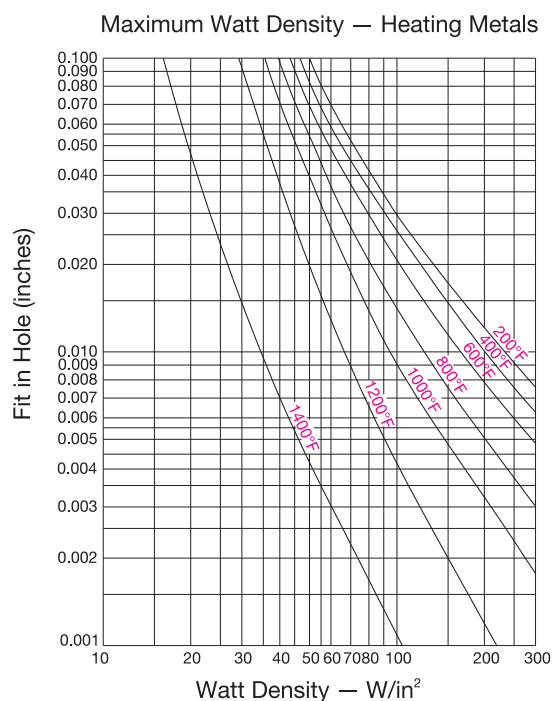

The graph shows the recommended maximum watt density for Tempco Hi-Density cartridge heaters at different operating temperatures and fit, when the heater is installed in an oxidized mild steel block. The thermocouple is located 1/2" from the heater. When heating other materials, the data needs to be extrapolated based on the thermal conductivity of the material. Consult Tempco with your requirements.

FIG. 2
Determining Fit



CONTINUED 

Recommendations for Improving the Life of Hi-Density Cartridge Heaters

Continued from previous page...

Determining Fit

When heating a platen, mold, die or hot runner probe with Hi-Density Cartridge Heaters inserted into drilled holes, fit is an important factor in determining the life expectancy of the heater. Fit is the difference between the minimum diameter of the cartridge heater and the maximum diameter of the hole. Unheated sections on a Hi-Density cartridge may be smaller in diameter due to swaging. To determine fit, use the smallest diameter on the heated length only.

Example: A 3/8" nominal OD Hi-Density cartridge heater has an actual diameter of .371" \pm .002, which translates to a minimum diameter of .369". If used in a .376" \pm .002 hole, the fit would be .009" (.378" - .369" = .009").

When medium watt density heaters (less than 60 watts per square inch) are used in low temperature applications (less than 600°F [315°C]) general purpose drills are commonly used to drill holes. The typical hole size may be .003" to .008" over the drill size. For higher watt density and/or higher temperature applications, we recommend that the holes are drilled and reamed for the tightest possible fit. In applications where precise temperature control and heat transfer properties are required, Hi-Density cartridge heaters can be centerless ground to \pm .0005".

Although a tighter fit is desirable to efficiently transfer heat and to get long heater life, a looser fit will aid in installing and removing heaters, especially long heaters. We recommend that you apply Tempco's BNS anti-seize cartridge heater coating as it will improve heat transfer and will make the removal of heaters easier.

The graph in Fig 1. (page 2-5) shows the effect of fit in determining the maximum recommended watt density on a steel platen. As it is indicated in the graph, the tighter the fit, the higher the maximum recommended watt density.

Temperature Control and Location of Temperature Sensing Device

In order to better control the heater temperature and hence the resistance wire temperature, use of an appropriate temperature control and the proximity of the heater to the sensor is very important. The graph in Fig. 1 (page 2-5) shows the effect of operating temperature in determining the maximum recommended watt density on a steel platen where the sensor is located 1/2" from the heater. Higher watt density heaters can generate heat faster than the surrounding area's ability to dissipate heat. This creates a thermal lag between the heater and the sensor. The closer the sensor to the heater, the better you can control the heater temperature. By keeping the sensor further from the heater, temperature gradients of several hundred degrees can be observed in many applications, especially during initial start-up and heavy thermal cycling. Although the set operating temperature may be low, the heater may be running at a very high temperature. This is a common cause of heater failure. This can be minimized using time proportional and PID functions of the temperature controllers. See Section 13 for temperature controllers and Section 14 for thermocouples and sensors.

Power Control

Power control methods affect the life expectancy of heating elements. In general, although economical, on-off controls increase thermal fatigue and oxidation rate on heating elements by causing wide temperature swings of the internal heating element. Silicon Controlled Rectifiers (SCRs), Mercury Relays and Solid State Power Controls can increase the life expectancy of heating elements by reducing the temperature swings of the internal heating element. See Section 13 for power controls.

Common Causes of Cartridge Heater Failures

Contamination

Contamination is a major cause of heater failure. Moisture, hydraulic oils, and melted plastic are the most common contaminants that are seen on failed heaters. Since the magnesium oxide insulation in a Hi-Density heater is hygroscopic in nature, moisture is easily absorbed into the heater and typically results in premature heater failure. Moisture absorption during machine washdown or cleanup also is a frequent problem. These contaminants, which are electrically conductive, will short out the heater. Most probably, the failures will be at the lead end of the heater and in some cases can split or blow a hole on the heater sheath. The disc end of a Hi-Density cartridge heater is welded shut with a stainless steel disc.

Generally, contaminants enter the heater through the lead end of the heater. The high temperature lead wires used on Hi-Density heaters have fiberglass or mica insulation. Oil and moisture can wick through the insulation on the lead wire into the heater. Tempco offers a wide variety of terminations to avoid this problem, including epoxy seals, Teflon® seals, convoluted cables, welded end discs, Teflon® insulated lead wires and SJO cable. However, there are temperature limitations on many of these terminations.



Note: If you should encounter premature cartridge heater failure, consult Tempco. Our team of professionals will have the solution to your problem.

Excessive Flexing of Leads

Tempco Hi-Density heaters use flexible grade A nickel stranded lead wires with fiberglass or mica insulation. On certain terminations the lead wires are connected externally to solid nickel conductor pins. In applications where there is excessive movement or vibration, the solid pins could break due to fatigue. A simple solution is to give enough slack on the leads to minimize the stress on the solid pins or provide an internal lead wire connection within the heater. Tempco also offers strain relief brackets and springs to prevent this problem.

Where heater leads can wear out by abrasion due to excessive flexing of the leads, Tempco offers several abrasion resistant terminations. See pages 2-41 through 2-47.

Lack of Heat Sink

Hi-Density heaters are designed with minimum unheated (cold) sections. If the heated sections project from the platen or mold, these sections will get extremely hot due to lack of heat transfer. This will lead to premature heater failure. Tempco can manufacture heaters with cold sections anywhere along the length of the heater to prevent overheating of the heater sheath.

When a Hi-Density heater is used as a liquid immersion heater, make sure the heater's sheath length is completely immersed in the liquid. The heater lead end should not be immersed in liquid, since most of the lead end seals are only moisture resistant, not moisture proof.

Recommendations for Improving the Life of Hi-Density Cartridge Heaters

High Operating Temperature

Tempco Hi-Density heaters are designed to operate at sheath temperatures up to 1400°F (760°C). When process temperatures approach the maximum heater sheath temperature, make sure the sheath temperature doesn't exceed its limitations. Location of the thermocouple and the type of temperature and power controls are factors that affect sheath temperature and potential overshoot conditions.

Although the heater is designed to run at temperatures up to 1400°F (760°C), heater lead wires and terminations are rated for much lower temperatures. Care should be taken to make sure that the heater lead end temperatures do not exceed their limitations. Heaters can be made longer with unheated sections at the lead end to bring the lead end out of the high temperature area. Tempco can also provide you with a high temperature wiring harness, which can withstand temperatures up to 1400°F (760°C). See page 15-5 in the accessories section for details.



Note: As explained in the above paragraphs, the single major cause for cartridge heater failure is the selection of the wrong type of heater lead termination for the specific application. To assist you in selecting the right termination type, pages 2-39 through 2-57 give detailed descriptions of over 40 terminations designed to solve many of the common application problems. If you need further assistance, consult Tempco.

High Wattage Rating

Heaters with very high wattage ratings can create temperature overshoots, uneven temperature distribution and high heater sheath temperatures, causing premature heater failure.

For liquid immersion heaters, maximum watt density depends on the type of liquid being heated. The heavier or thicker the liquid, the lower the maximum watt density. Higher watt density can cause the liquid to carbonize and accumulate on the heater sheath, which will cause premature heater failure.

Scale and Sludge Buildup

In liquid immersion applications, periodic cleaning of the heater sheath is necessary to remove any scale buildup on the sheath. Scale can accumulate on the sheath and cause the heater to overheat and fail. When used to heat liquid in a tank, be sure to clean any sludge from the bottom of the tank. A heater sheath covered with sludge will overheat and fail.

Important Installation Considerations

- For closest fit and best heat transfer, use reamed holes.
- When possible, drill holes through the object being heated. This will make heater removal easier.
- When using an anti-seize coating like Tempco's BNS spray or paste, **do not apply** over lead wires or any other current carrying conductors.
- When using insulated tape or sleeving, check to make sure it is rated for the temperature of the application. Lower temperature rated materials can contain an adhesive or binder that can carbonize and become electrically conductive.
- When using heaters near their maximum recommended watt density, it is recommended that the temperature sensing probes be at maximum 1/2" from the heater sheath.
- Lead wires should not be located in the hole containing the cartridge heater during operation. This may cause the lead wires to be exposed to temperatures above their rated temperature.
- When used in a vacuum application, make sure the lead end of the heater is outside the vacuum. If the lead has to be in the vacuum, consult Tempco for specific recommendations.
- Many applications will subject a heater's electrical terminations to one or more of the following potentially damaging conditions:
 - Moisture
 - Oil and other contaminants
 - Flexing
 - Abrasion
 - High temperature



Note: To protect the heater from damage in these harsh environments, Tempco has a wide selection of terminations and options available. See pages 2-39 through 2-60 for details.

BNS Anti-Seize Cartridge Heater Coating

This high temperature, electrically insulating and thermally conductive coating will minimize oxidation and improve heat transfer from heater to the object being heated.

Brush a thin layer of paste or spray lightly over the cartridge heater prior to inserting the heater into a hole.



Do not apply over lead wires or other bare current carrying conductors, since the water in the paste and spray can cause an electrical short circuit.



13 oz.
Aerosol spray can

Part Number:
CML00010

- * Temperature Range 1562°F (850°C)
- * High Heat Transfer



4 oz.
Paste w/brush applicator top
Part Number: CML00020

- * Temperature Range 1562°F (850°C)
- * High Heat Transfer



Note: Formulated to assist in the removal of cartridge heaters.


All Items Available from Stock

Highly Engineered Custom Manufactured Specific Use Cartridge Heaters

Meeting the Challenges of Original Equipment Manufacturers with Custom Engineering

Tempco has been at the forefront of addressing the challenges of original equipment manufacturers (OEMs) in diversified industries, when dependable and reliable performance of custom engineered cartridge heaters is crucial to the overall operating efficiency and quality of their equipment and machinery.

Tempco is a company uniquely qualified and committed to providing value-added expertise in engineering and manufacturing that spans over four decades of acquired knowledge, assisting customers in developing highly engineered specific use cartridge heaters for equipment and/or machinery systems.

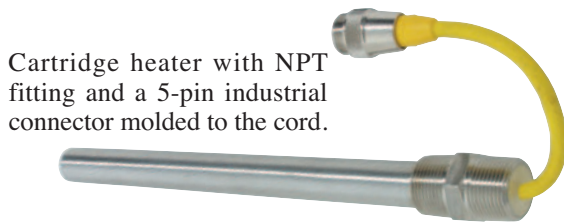

Cartridge heater with NPT fitting and a 5-pin industrial connector molded to the cord.



Cartridge heater for continuous air heating application with Incoloy® sheath, custom machined fitting and silicone rubber moisture barrier.



Cartridge heater with built-in thermal fuse and ground wire for X-Ray processing equipment.



Cartridge heater with built-in thermostat, pipe fitting and ground leads for oil heating in waste handling equipment.




Finned Cartridge Oil Immersion Heater with a liquid-tight electrical termination.

Complete a New Project on Time, Improve Efficiencies and Reduce Cost

Consult Tempco, your strategic partner, in the early stages of a new project requiring cartridge heaters, or to improve a troublesome existing application. By doing so you allow Tempco to place at your disposal our team of professionals, offering you our vast knowledge in product design and manufacturing expertise. We can provide you with the optimal solution to your thermal loop system and cartridge heater design challenges.

Tempco offers you the perfect balance in quality and service with value-added technology. These pictures depict a small sampling of the cartridge heaters we have developed for special applications. Put our knowledge and experience to work for you.

*Our capabilities are limited only by your imagination.
Consult us with your requirements.
We welcome your inquiries.*

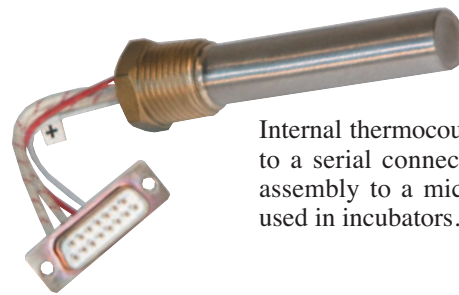


Internal thermocouple is wired to a serial connector for easy assembly to a microprocessor used in incubators.



Incoloy® fitting and seamless Incoloy® 800 sheath material used in an aviation application.



Straight armor cable and adjustable bayonet cap for easy assembly.

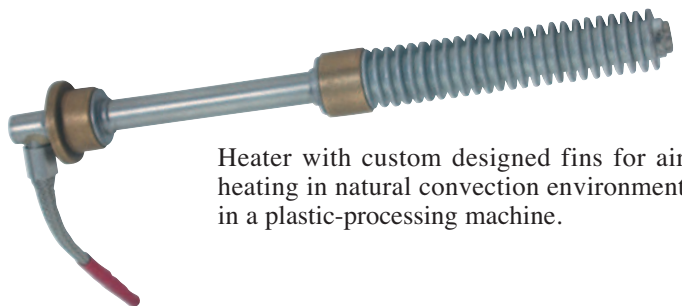

Heater with custom designed fins for air heating in natural convection environment in a plastic-processing machine.


Highly Engineered Custom Manufactured Specific Use Cartridge Heaters




The heater has a header cap as an integral part of the fitting. Leads exit through small holes that are sealed with epoxy for moisture protection.



Miniature cartridge heaters are ideal for applications where there are space constrictions and high, concentrated power is required.

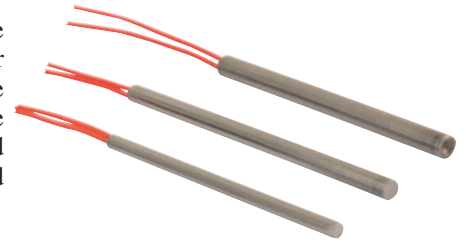

Heater designed to run continuously at 1202°F (650°C); built-in isolated thermocouple and ground wire.

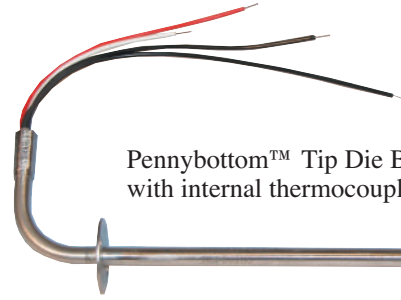


Pennybottom™ Tip Die Bolt heater with internal thermocouple




SJO cord and molded plug for automotive air conditioning recharging units.

Heater for medical diagnostic instruments has an integrated heat sink and thermal fuse.

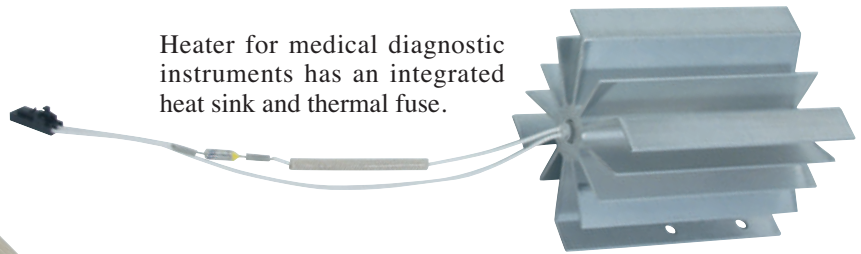

Cartridge heaters can be formed into complex shapes.

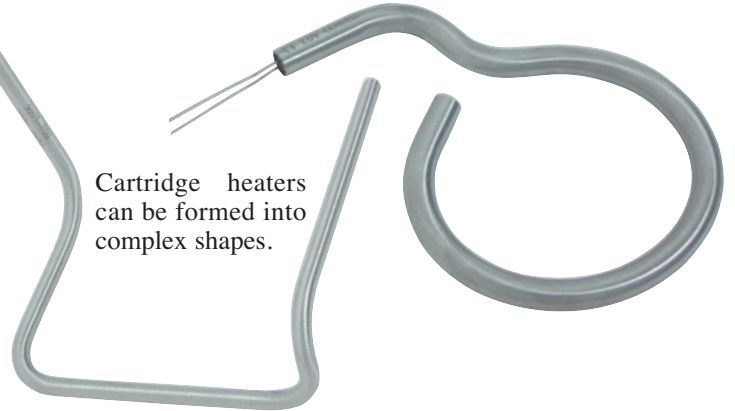

Optional Inspection Services and Test Reports

Die Penetrant Test

This non-destructive testing can detect imperfections in weld joints. For critical applications, each individual heater's weld joints by end cap and fittings can be tested. Certified test reports will be sent with each shipment.

Hydrostatic Pressure Test


Cartridge heaters with attached pipe fittings can be pressure tested to your specifications at Tempco. Our in-house testing capabilities can ensure that your products meet your exact specifications.

Electrical Tests

Our state of the art test meter can perform AC/DC dielectric withstand test (Hypot) up to 5000 volts while measuring leakage current in micro amps. It can also measure Insulation resistance (IR) and heater element resistance. Heaters can be serialized and test reports can be sent with each shipment if required.

*Consult Tempco with Your Requirements.
We Welcome Your Inquiries.*

Custom Terminated Multi-Purpose Use Cartridge Heaters from the Terminator Program

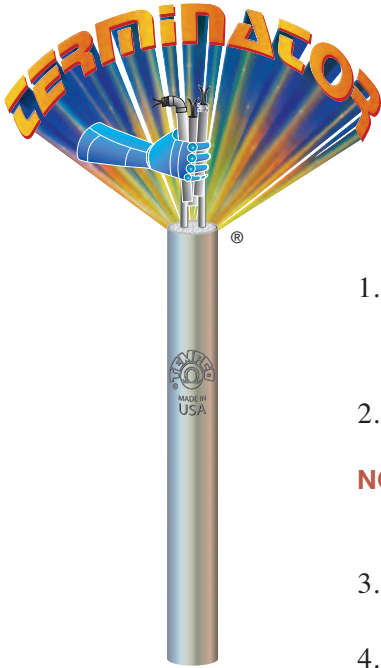

Tempco stocks over 1000 different Semi-Finished Hi-Density Cartridge Heaters in diameters 1/4", 5/16", 3/8", 1/2", 5/8" and 3/4".

These cartridge heaters are semi-finished (substrates), offering you the option to finish them by choosing from 19 program-qualified lead end terminations and options. Cartridge heaters will be ready for shipment within 1 to 3 days, depending on the termination/option selected.

Ordering Information – Follow These Simple Steps


1. Select an available 1/4" through 3/4" Hi-Density cartridge heater from the stock lists on pages 2-14 through 2-21. The Part Numbers in the tables are for heaters with termination Type N (10" long externally connected lead wires). **Call Tempco for part numbers for stock heaters with other Terminator Program terminations.**
 2. Refer to the Program-Qualified Lead Terminations Reference Photos below and on page 2-13 to select the cartridge heater termination type best suited for your application.
- NOTE:** Type "N" (10" long externally connected plain lead wires) is the most common termination applied in the Terminator program. **If a termination other than Type N is selected, a new permanent part number will be assigned when your order is placed.**
3. Specify your lead requirements in the event that the standard supplied lengths for Plain Leads (10"), Braid or Armor Cable (10" over 12" leads) are not suited for your application.
 4. Specify the Quantity.

These Program-Qualified Lead Terminations and Options for Stock Cartridge Heater Substrates will ship Same or Next Day when ordered before 2PM (CST).

Terminations


Type N

Standard Leads
(page 2-39)




Type B

Ceramic Bead Insulation
(page 2-48)




Type BL

Ceramic Bead and Leads
(page 2-48)

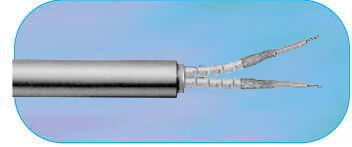


Type C1A & C1B only
Straight Armor Cable
(page 2-43)




Type C2A & C2B

Right-Angle Armor
Cable with Copper Elbow
(page 2-47)



Type R1A


Right-Angle Leads with
Copper Elbow
(page 2-44)

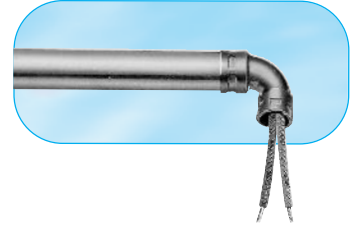

Options


Type MFR

Mounting Flange Round
(page 2-52)



Type LR

Locating Ring
(page 2-52)




Type PS

Pull Strap
(page 2-52)



Type P

Quick Disconnect Plug
(page 2-56)

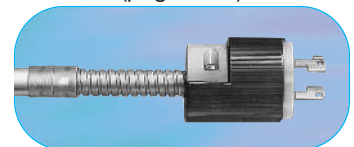


*These Program-Qualified Lead Terminations and Options
for Stock Cartridge Heater Substrates
will ship 2nd or 3rd Day when ordered before 2PM (CST).*

Terminations


Type W

Straight Wire Braided Leads
(page 2-42)




Type M2A & M2E

Potted Lead End Seal
(Cement Only)
(page 2-40)




Type CMB & CMP

Single Threaded Fitting
(page 2-50)

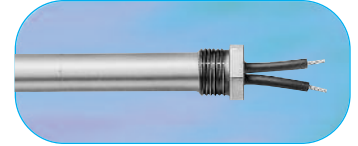


Type W1A & W1B

Right-Angle Wire
Braided Leads
(page 2-46)



Type C3A, C3B, C3C & C3D

Right-Angle Armor Cable
(page 2-47)



Type R2A & R2B

Right-Angle Leads
(page 2-45)



Options


Type R3

Angled Sheath Extension
(Cement Potting Only)
(page 2-53)



Type E1

General Purpose Box
(page 2-54)



Type GL

Ground Lead Sheath
(page 2-59)



*Complete specifications and details on these terminations can be
found on the specified catalog page numbers.*

**Custom
Manufactured**



Custom Engineered/Manufactured Hi-Density Cartridge Heaters

(Refer to pages 2-2 through 2-9)

Because cartridge heaters can be very application specific, consult Tempco with your special requirements. For sizes, electrical ratings and any other design features required but not listed in the catalog, Tempco will custom engineer and manufacture to your specifications.

Consult Us with Your Requirements. We Welcome Your Inquiries.

Cartridge Heaters



Hi-Density

STOCK — Immediate Delivery through the **TERMINATOR** Lead Conversion Program



1/4" Actual .246" (6.25 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination). Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 1 | 25.4 | 50 | 127 | 20 | HDC00001 | — |
| 1 | 25.4 | 80 | 204 | 32 | HDC00002 | — |
| 1 | 25.4 | 100 | 255 | 40 | HDC00003 | HDC00004 |
| 1 | 25.4 | 150 | 382 | 59 | HDC00005 | — |
| 1 1/8 | 28.6 | 100 | 204 | 32 | HDC00006 | — |
| 1 1/4 | 31.8 | 50 | 85 | 13 | HDC00007 | — |
| 1 1/4 | 31.8 | 75 | 127 | 20 | HDC00008 | — |
| 1 1/4 | 31.8 | 100 | 170 | 26 | HDC00009 | — |
| 1 1/4 | 31.8 | 125 | 212 | 33 | HDC00010 | — |
| 1 1/4 | 31.8 | 150 | 255 | 40 | HDC00011 | HDC00012 |
| 1 1/4 | 31.8 | 200 | 340 | 53 | — | HDC00013 |
| 1 1/4 | 31.8 | 225 | 382 | 59 | — | HDC00014 |
| 1 1/2 | 38.1 | 50 | 64 | 10 | HDC00015 | — |
| 1 1/2 | 38.1 | 75 | 92 | 14 | HDC08691 | — |
| 1 1/2 | 38.1 | 100 | 127 | 20 | HDC00016 | HDC00017 |
| 1 1/2 | 38.1 | 150 | 191 | 30 | HDC00018 | HDC00019 |
| 1 1/2 | 38.1 | 175 | 223 | 35 | HDC00020 | HDC00021 |
| 1 1/2 | 38.1 | 200 | 255 | 40 | HDC00022 | HDC00023 |
| 1 1/2 | 38.1 | 250 | 318 | 49 | — | HDC00024 |
| 1 3/4 | 44.5 | 75 | 76 | 12 | HDC00025 | — |
| 1 3/4 | 44.5 | 150 | 153 | 24 | HDC00026 | — |
| 1 3/4 | 44.5 | 300 | 306 | 47 | — | HDC00027 |
| 2 | 50.8 | 50 | 42 | 7 | HDC00028 | — |
| 2 | 50.8 | 80 | 68 | 11 | HDC00029 | — |
| 2 | 50.8 | 100 | 85 | 13 | HDC00030 | HDC00031 |
| 2 | 50.8 | 125 | 106 | 17 | HDC00032 | HDC00033 |
| 2 | 50.8 | 150 | 127 | 20 | HDC00034 | HDC00035 |
| 2 | 50.8 | 200 | 170 | 26 | HDC00036 | HDC00037 |
| 2 | 50.8 | 250 | 212 | 33 | HDC00038 | HDC00039 |
| 2 | 50.8 | 300 | 255 | 40 | — | HDC00040 |
| 2 1/4 | 57.2 | 200 | 146 | 23 | HDC10139 | HDC00041 |
| 2 1/2 | 63.5 | 150 | 95 | 15 | — | HDC00042 |
| 2 1/2 | 63.5 | 200 | 127 | 20 | HDC00043 | HDC00044 |
| 2 1/2 | 63.5 | 250 | 159 | 25 | HDC00045 | HDC00046 |
| 2 3/4 | 69.9 | 200 | 113 | 18 | — | HDC00048 |
| 3 | 76.2 | 75 | 38 | 6 | HDC00049 | — |
| 3 | 76.2 | 100 | 51 | 8 | HDC00050 | HDC00051 |
| 3 | 76.2 | 125 | 64 | 10 | — | HDC00052 |
| 3 | 76.2 | 150 | 76 | 12 | HDC00053 | HDC00054 |
| 3 | 76.2 | 200 | 102 | 16 | HDC00055 | HDC00056 |


| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 3 | 76.2 | 250 | 127 | 20 | HDC00057 | HDC00058 |
| 3 | 76.2 | 300 | 153 | 24 | HDC00059 | HDC00060 |
| 3 | 76.2 | 350 | 178 | 28 | — | HDC00061 |
| 3 1/2 | 88.9 | 200 | 85 | 13 | — | HDC00062 |
| 3 1/2 | 88.9 | 300 | 127 | 20 | HDC00063 | HDC00064 |
| 3 3/4 | 95.3 | 300 | 118 | 18 | — | HDC00065 |
| 4 | 101.6 | 100 | 36 | 6 | HDC00066 | — |
| 4 | 101.6 | 150 | 55 | 9 | HDC00067 | — |
| 4 | 101.6 | 175 | 64 | 10 | HDC00068 | HDC00069 |
| 4 | 101.6 | 200 | 73 | 11 | HDC00070 | HDC00071 |
| 4 | 101.6 | 250 | 91 | 14 | HDC00072 | HDC00073 |
| 4 | 101.6 | 300 | 109 | 17 | HDC00074 | HDC00075 |
| 4 | 101.6 | 400 | 146 | 23 | — | HDC00076 |
| 4 1/2 | 114.3 | 125 | 40 | 6 | HDC00077 | — |
| 4 1/2 | 114.3 | 200 | 64 | 10 | HDC00078 | — |
| 4 1/2 | 114.3 | 500 | 159 | 25 | — | HDC00079 |
| 5 | 127.0 | 200 | 57 | 9 | — | HDC00080 |
| 5 | 127.0 | 250 | 71 | 11 | — | HDC00081 |
| 5 | 127.0 | 300 | 87 | 14 | HDC22940 | — |
| 5 | 127.0 | 350 | 99 | 15 | HDC00082 | HDC00083 |
| 5 | 127.0 | 400 | 113 | 18 | HDC00084 | HDC00085 |
| 5 1/4 | 146.1 | 350 | 85 | 13 | HDC00086 | HDC00087 |
| 6 | 152.4 | 150 | 35 | 5 | HDC00088 | — |
| 6 | 152.4 | 200 | 46 | 7 | — | HDC00089 |
| 6 | 152.4 | 300 | 69 | 11 | HDC00090 | HDC00091 |
| 6 | 152.4 | 400 | 93 | 14 | HDC00092 | HDC00093 |
| 6 | 152.4 | 450 | 104 | 16 | HDC00094 | HDC00095 |
| 6 | 152.4 | 600 | 139 | 22 | — | HDC00096 |
| 6 1/2 | 165.1 | 500 | 106 | 17 | HDC00097 | HDC00098 |
| 7 | 177.8 | 500 | 98 | 15 | HDC20502 | — |
| 7 | 177.8 | 600 | 118 | 18 | — | HDC00099 |
| 7 1/2 | 190.5 | 525 | 95 | 15 | HDC00100 | — |
| 8 | 203.2 | 300 | 51 | 8 | HDC00101 | — |
| 8 | 203.2 | 600 | 102 | 16 | — | HDC00102 |
| 9 | 228.6 | 675 | 101 | 16 | — | HDC00103 |
| 9 1/2 | 241.3 | 525 | 74 | 12 | HDC00104 | — |
| 10 | 254.0 | 750 | 101 | 16 | — | HDC00105 |
| 11 | 279.4 | 600 | 73 | 11 | — | HDC00106 |
| 13 | 330.2 | 725 | 74 | 12 | — | HDC00107 |

Ordering Information

Order by Part Number for stock Cartridge heaters with Type N termination. Call Tempco for part numbers for stock heaters with other Terminator Program terminations and options (see pages 2-12 & 2-13).

Custom Engineered/Manufactured

Cartridge Heaters can be application specific; therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

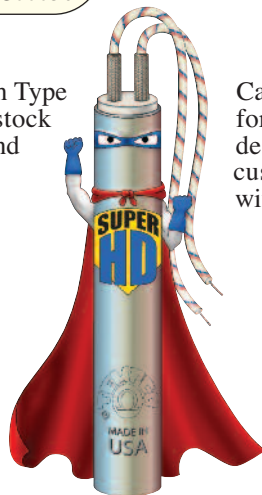

[View Product Inventory @ www.tempco.com](http://www.tempco.com)

STOCK — Immediate Delivery through the  Lead Conversion Program

5/16" Actual .308" (7.82 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination).
Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 2 | 50.8 | 150 | 102 | 16 | HDC00108 | — |
| 2½ | 63.5 | 150 | 76 | 12 | HDC00109 | — |
| 2½ | 63.5 | 200 | 102 | 16 | HDC00110 | HDC00111 |
| 3 | 76.2 | 225 | 92 | 14 | HDC00112 | HDC00113 |
| 3¾ | 85.7 | 160 | 57 | 9 | HDC00114 | — |
| 3½ | 88.9 | 250 | 85 | 13 | HDC00115 | — |

3/8" Actual .371" (9.42 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination).
Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 1 | 25.4 | 50 | 85 | 13 | HDC00125 | — |
| 1 | 25.4 | 100 | 170 | 26 | HDC00127 | — |
| 1 | 25.4 | 150 | 255 | 40 | HDC00128 | HDC00129 |
| 1 | 25.4 | 200 | 340 | 53 | — | HDC00130 |
| 1¼ | 31.8 | 100 | 113 | 18 | HDC00133 | — |
| 1¼ | 31.8 | 150 | 170 | 26 | HDC00135 | HDC00136 |
| 1¼ | 31.8 | 200 | 226 | 35 | HDC00137 | HDC00138 |
| 1¼ | 31.8 | 200 | 226 | 35 | HDC00139 | HDC00140 |
| 1½ | 38.1 | 100 | 104 | 16 | HDC00141 | — |
| 1½ | 38.1 | 150 | 157 | 24 | HDC00142 | HDC00143 |
| 1½ | 38.1 | 150 | 146 | 23 | HDC00144 | — |
| 1½ | 38.1 | 100 | 91 | 14 | HDC00146 | — |
| 1½ | 38.1 | 30 | 25 | 4 | HDC00147 | HDC00148 |
| 1½ | 38.1 | 50 | 42 | 7 | HDC00149 | — |
| 1½ | 38.1 | 75 | 64 | 10 | HDC00150 | HDC00151 |
| 1½ | 38.1 | 100 | 85 | 13 | — | HDC00152 |
| 1½ | 38.1 | 125 | 106 | 17 | HDC00153 | HDC00154 |
| 1½ | 38.1 | 150 | 127 | 20 | HDC00155 | HDC00156 |
| 1½ | 38.1 | 200 | 170 | 26 | HDC00157 | HDC00158 |
| 1½ | 38.1 | 250 | 212 | 33 | HDC00160 | HDC00161 |
| 1¾ | 44.5 | 150 | 102 | 16 | — | HDC00163 |
| 1¾ | 44.5 | 200 | 136 | 21 | HDC00164 | HDC00165 |
| 1¾ | 44.5 | 250 | 170 | 26 | — | HDC00166 |
| 1⅞ | 46.0 | 150 | 97 | 15 | HDC00167 | — |
| 1⅞ | 46.0 | 200 | 129 | 20 | HDC00169 | — |
| 1⅞ | 46.0 | 250 | 154 | 24 | HDC00170 | — |
| 2 | 50.8 | 50 | 28 | 4 | HDC00171 | — |
| 2 | 50.8 | 75 | 42 | 7 | HDC00172 | HDC00173 |
| 2 | 50.8 | 100 | 57 | 9 | HDC00174 | — |
| 2 | 50.8 | 125 | 71 | 11 | HDC00175 | HDC00176 |
| 2 | 50.8 | 150 | 85 | 13 | HDC00177 | HDC00178 |
| 2 | 50.8 | 200 | 113 | 18 | HDC00179 | HDC00180 |
| 2 | 50.8 | 250 | 141 | 22 | HDC00181 | HDC00182 |
| 2 | 50.8 | 300 | 170 | 26 | — | HDC00183 |
| 2 | 50.8 | 350 | 198 | 31 | HDC00184 | HDC00185 |
| 2 | 50.8 | 400 | 226 | 35 | HDC00186 | HDC00187 |
| 2 | 50.8 | 500 | 283 | 44 | HDC00189 | — |
| 2¼ | 57.2 | 75 | 36 | 6 | HDC00190 | — |
| 2¼ | 57.2 | 100 | 49 | 8 | HDC00191 | HDC00192 |
| 2¼ | 57.2 | 125 | 61 | 9 | — | HDC00193 |
| 2¼ | 57.2 | 150 | 73 | 11 | HDC00194 | — |
| 2¼ | 57.2 | 175 | 85 | 13 | — | HDC00196 |
| 2¼ | 57.2 | 200 | 97 | 15 | HDC00197 | — |
| 2¼ | 57.2 | 250 | 125 | 19 | HDC00199 | HDC00200 |
| 2¼ | 57.2 | 300 | 146 | 23 | — | — |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 2¼ | 57.2 | 350 | 170 | 26 | HDC00201 | HDC00202 |
| 2¼ | 57.2 | 400 | 194 | 30 | — | HDC00204 |
| 2¼ | 57.2 | 500 | 243 | 38 | — | HDC00205 |
| 2½ | 60.3 | 75 | 34 | 5 | HDC00206 | — |
| 2½ | 60.3 | 165 | 75 | 12 | — | HDC00207 |
| 2½ | 60.3 | 300 | 136 | 21 | — | HDC00210 |
| 2½ | 63.5 | 100 | 42 | 7 | HDC00213 | HDC00214 |
| 2½ | 63.5 | 125 | 53 | 8 | HDC00215 | — |
| 2½ | 63.5 | 150 | 64 | 10 | — | HDC00216 |
| 2½ | 63.5 | 200 | 85 | 13 | HDC00217 | HDC00218 |
| 2½ | 63.5 | 250 | 106 | 17 | HDC00219 | HDC00220 |
| 2½ | 63.5 | 300 | 127 | 20 | HDC00221 | HDC00222 |
| 2½ | 63.5 | 350 | 149 | 23 | — | HDC00223 |
| 2½ | 63.5 | 400 | 174 | 27 | HDC00224 | — |
| 2½ | 63.5 | 500 | 212 | 33 | HDC00227 | HDC00228 |
| 2¾ | 69.9 | 400 | 151 | 23 | — | HDC00231 |
| 2⅞ | 71.4 | 300 | 110 | 17 | — | HDC00235 |
| 3 | 76.2 | 100 | 34 | 5 | HDC00236 | HDC00237 |
| 3 | 76.2 | 125 | 42 | 7 | HDC00238 | — |
| 3 | 76.2 | 150 | 51 | 8 | HDC00239 | — |
| 3 | 76.2 | 200 | 68 | 11 | — | HDC00241 |
| 3 | 76.2 | 250 | 85 | 13 | HDC00242 | HDC00243 |
| 3 | 76.2 | 300 | 102 | 16 | HDC00244 | HDC00245 |
| 3 | 76.2 | 375 | 127 | 20 | HDC00247 | — |
| 3 | 76.2 | 400 | 136 | 21 | HDC00249 | HDC00250 |
| 3 | 76.2 | 500 | 170 | 26 | HDC00251 | HDC00252 |
| 3 | 76.2 | 600 | 204 | 32 | — | HDC00253 |
| 3 | 76.2 | 750 | 255 | 40 | — | HDC00254 |
| 3⅞ | 84.1 | 500 | 151 | 23 | HDC00255 | — |
| 3½ | 88.9 | 125 | 35 | 6 | HDC00256 | — |
| 3½ | 88.9 | 200 | 57 | 9 | — | HDC00257 |
| 3½ | 88.9 | 225 | 64 | 10 | — | HDC00258 |
| 3½ | 88.9 | 250 | 71 | 11 | HDC00259 | HDC00260 |
| 3½ | 88.9 | 300 | 85 | 13 | HDC00261 | HDC00262 |
| 3½ | 88.9 | 350 | 99 | 15 | HDC00263 | HDC00264 |
| 3½ | 88.9 | 400 | 113 | 18 | — | HDC00265 |
| 3½ | 88.9 | 500 | 141 | 22 | HDC00266 | HDC00267 |
| 3⅞ | 96.8 | 150 | 38 | 6 | HDC00269 | — |
| 3⅞ | 96.8 | 500 | 128 | 20 | — | HDC00270 |
| 4 | 101.6 | 100 | 24 | 4 | HDC00272 | — |
| 4 | 101.6 | 125 | 30 | 5 | HDC00273 | HDC00274 |
| 4 | 101.6 | 150 | 36 | 6 | HDC00275 | — |
| 4 | 101.6 | 175 | 42 | 7 | HDC00276 | — |
| 4 | 101.6 | 200 | 49 | 8 | HDC00277 | HDC00278 |

Cartridge Heaters



Hi-Density

STOCK — Immediate Delivery through the Terminator Program Lead Conversion Program



Continued from previous page...

3/8" Actual .371" (9.42 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination). Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length in | mm | Watts | Watt Density | | Part Number | |
|---------------------|-------|-------|-------------------|-------------------|-------------|----------|
| | | | W/in ² | W/cm ² | 120V | 240V |
| 4 | 101.6 | 250 | 61 | 9 | HDC00279 | HDC00280 |
| 4 | 101.6 | 300 | 73 | 11 | HDC00281 | HDC00282 |
| 4 | 101.6 | 350 | 85 | 13 | HDC00283 | HDC00284 |
| 4 | 101.6 | 400 | 97 | 15 | HDC00285 | HDC00286 |
| 4 | 101.6 | 450 | 109 | 17 | — | HDC00288 |
| 4 | 101.6 | 500 | 121 | 19 | HDC00289 | HDC00290 |
| 4 | 101.6 | 600 | 146 | 23 | — | HDC00292 |
| 4 | 101.6 | 700 | 170 | 26 | — | HDC00293 |
| 4 | 101.6 | 750 | 182 | 28 | — | HDC00294 |
| 4 1/4 | 108.0 | 300 | 68 | 11 | — | HDC00295 |
| 4 1/4 | 108.0 | 750 | 170 | 26 | — | HDC00296 |
| 4 1/2 | 114.3 | 250 | 53 | 8 | — | HDC00297 |
| 4 1/2 | 114.3 | 300 | 64 | 10 | HDC00298 | HDC00299 |
| 4 1/2 | 114.3 | 450 | 95 | 15 | HDC00302 | HDC00303 |
| 4 1/2 | 114.3 | 500 | 106 | 17 | HDC00304 | HDC00305 |
| 4 3/4 | 120.7 | 300 | 60 | 9 | — | HDC00307 |
| 4 13/16 | 122.2 | 300 | 59 | 9 | — | HDC00308 |
| 4 13/16 | 122.2 | 500 | 98 | 15 | — | HDC00309 |
| 5 | 127.0 | 150 | 28 | 4 | HDC00312 | HDC00313 |
| 5 | 127.0 | 200 | 38 | 6 | HDC00314 | HDC00315 |
| 5 | 127.0 | 250 | 47 | 7 | HDC00316 | — |
| 5 | 127.0 | 300 | 57 | 9 | HDC00317 | HDC00318 |
| 5 | 127.0 | 350 | 66 | 10 | — | HDC00319 |
| 5 | 127.0 | 400 | 75 | 12 | HDC00320 | HDC00321 |
| 5 | 127.0 | 500 | 94 | 15 | HDC00323 | HDC00324 |
| 5 | 127.0 | 600 | 113 | 18 | — | HDC00327 |
| 5 | 127.0 | 700 | 132 | 21 | — | HDC00328 |
| 5 | 127.0 | 750 | 141 | 22 | — | HDC00329 |
| 5 | 127.0 | 800 | 151 | 23 | — | HDC00330 |
| 5 | 127.0 | 1000 | 189 | 29 | — | HDC00331 |
| 5 1/4 | 133.3 | 200 | 36 | 6 | — | HDC00332 |
| 5 1/2 | 139.7 | 250 | 42 | 7 | HDC00334 | HDC00335 |
| 5 1/2 | 139.7 | 550 | 93 | 15 | — | HDC00338 |
| 5 1/2 | 139.7 | 600 | 102 | 16 | — | HDC00339 |
| 5 1/2 | 139.7 | 1000 | 170 | 26 | — | HDC00340 |
| 5 3/4 | 146.1 | 400 | 65 | 10 | — | HDC00341 |
| 5 3/4 | 146.1 | 600 | 97 | 15 | HDC00342 | HDC00343 |
| 6 | 152.4 | 200 | 31 | 5 | HDC00344 | — |
| 6 | 152.4 | 250 | 39 | 6 | HDC00345 | HDC00346 |
| 6 | 152.4 | 300 | 46 | 7 | HDC00347 | HDC00348 |
| 6 | 152.4 | 400 | 62 | 10 | HDC00349 | HDC00350 |
| 6 | 152.4 | 500 | 77 | 12 | HDC00351 | HDC00352 |
| 6 | 152.4 | 600 | 93 | 14 | HDC00353 | HDC00354 |
| 6 | 152.4 | 675 | 104 | 16 | — | HDC00355 |
| 6 | 152.4 | 750 | 116 | 18 | HDC00356 | HDC00357 |
| 6 | 152.4 | 800 | 123 | 19 | — | HDC00358 |
| 6 | 152.4 | 900 | 139 | 22 | — | HDC00359 |
| 6 | 152.4 | 1000 | 154 | 24 | — | HDC00360 |
| 6 1/2 | 165.1 | 600 | 85 | 13 | — | HDC00361 |
| 6 1/2 | 165.1 | 1000 | 141 | 22 | — | HDC00362 |
| 7 | 177.8 | 250 | 33 | 5 | HDC00365 | HDC00366 |
| 7 | 177.8 | 350 | 46 | 7 | — | HDC00367 |

| Sheath Length in | mm | Watts | Watt Density | | Part Number | |
|---------------------|-------|-------|-------------------|-------------------|-------------|----------|
| | | | W/in ² | W/cm ² | 120V | 240V |
| 7 | 177.8 | 400 | 52 | 8 | HDC00368 | — |
| 7 | 177.8 | 500 | 65 | 10 | — | HDC00369 |
| 7 | 177.8 | 600 | 78 | 12 | HDC00370 | HDC00371 |
| 7 | 177.8 | 750 | 98 | 15 | — | HDC00373 |
| 7 | 177.8 | 775 | 101 | 16 | — | HDC00374 |
| 7 | 177.8 | 1000 | 131 | 20 | — | HDC00375 |
| 7 1/2 | 190.5 | 600 | 73 | 11 | — | HDC00377 |
| 7 1/2 | 190.5 | 725 | 88 | 14 | — | HDC00378 |
| 7 1/2 | 190.5 | 850 | 103 | 16 | — | HDC00379 |
| 7 1/2 | 190.5 | 1000 | 121 | 19 | — | HDC00380 |
| 7 13/16 | 198.4 | 750 | 87 | 14 | — | HDC00381 |
| 8 | 203.2 | 250 | 30 | 5 | HDC07944 | — |
| 8 | 203.2 | 300 | 34 | 5 | HDC00382 | HDC00383 |
| 8 | 203.2 | 400 | 45 | 7 | HDC00384 | — |
| 8 | 203.2 | 450 | 51 | 8 | HDC00385 | — |
| 8 | 203.2 | 500 | 57 | 9 | HDC00386 | HDC00387 |
| 8 | 203.2 | 600 | 68 | 11 | HDC00388 | HDC00389 |
| 8 | 203.2 | 700 | 79 | 12 | — | HDC00390 |
| 8 | 203.2 | 750 | 85 | 13 | — | HDC00391 |
| 8 | 203.2 | 900 | 102 | 16 | — | HDC00392 |
| 8 | 203.2 | 1000 | 113 | 18 | — | HDC00393 |
| 8 3/8 | 219.1 | 500 | 52 | 8 | — | HDC00395 |
| 9 | 228.6 | 200 | 20 | 3 | HDC00396 | HDC00397 |
| 9 | 228.6 | 500 | 50 | 8 | — | HDC00398 |
| 9 | 228.6 | 885 | 88 | 14 | — | HDC00399 |
| 9 | 228.6 | 1000 | 100 | 16 | — | HDC00400 |
| 9 1/2 | 241.3 | 200 | 19 | 3 | HDC00401 | — |
| 9 1/2 | 241.3 | 600 | 57 | 9 | — | HDC00402 |
| 9 1/2 | 241.3 | 1000 | 94 | 15 | — | HDC00403 |
| 10 | 254.0 | 400 | 36 | 5 | HDC00405 | — |
| 10 | 254.0 | 500 | 45 | 7 | — | HDC00407 |
| 10 | 254.0 | 600 | 54 | 8 | HDC00408 | HDC00409 |
| 10 | 254.0 | 700 | 63 | 10 | — | HDC00410 |
| 10 | 254.0 | 750 | 67 | 10 | — | HDC00411 |
| 10 | 254.0 | 1000 | 89 | 14 | — | HDC00413 |
| 10 | 254.0 | 1500 | 134 | 21 | — | HDC00415 |
| 10 13/16 | 274.6 | 375 | 31 | 5 | — | HDC00416 |
| 12 | 304.8 | 400 | 30 | 5 | HDC00417 | — |
| 12 | 304.8 | 500 | 37 | 6 | — | HDC00418 |
| 12 | 304.8 | 600 | 44 | 7 | HDC00419 | HDC00420 |
| 12 | 304.8 | 750 | 57 | 9 | — | HDC14222 |
| 12 | 304.8 | 1000 | 74 | 11 | — | HDC00421 |
| 12 | 304.8 | 1500 | 113 | 18 | — | HDC06225 |
| 12 13/16 | 325.4 | 1000 | 69 | 11 | — | HDC00422 |
| 13 | 330.2 | 1000 | 70 | 11 | — | HDC07200 |
| 14 | 355.6 | 600 | 39 | 6 | — | HDC22941 |
| 14 | 355.6 | 750 | 47 | 7 | — | HDC00423 |
| 16 | 406.4 | 600 | 34 | 5 | — | HDC22942 |
| 16 | 406.4 | 1200 | 66 | 10 | — | HDC00424 |
| 18 | 457.2 | 1000 | 58 | 9 | — | HDC22943 |
| 20 | 508.0 | 1000 | 53 | 8 | — | HDC09305 |
| 24 | 609.6 | 1000 | 38 | 6 | — | HDC10234 |

Ordering Information

Order by Part Number for stock Cartridge heaters with Type N termination. Call Tempco for part numbers for stock heaters with other Terminator Program terminations and options (see pages 2-12 & 2-13).

Custom Engineered/Manufactured

Cartridge Heaters can be application specific; therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

[View Product Inventory @ www.tempco.com](http://www.tempco.com)

STOCK — Immediate Delivery through the **TERMINATOR** Lead Conversion Program

1/2" Actual .496" (12.60 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination).
Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 1 | 25.4 | 50 | 64 | 10 | HDC00426 | — |
| 1 | 25.4 | 150 | 191 | 30 | HDC00427 | — |
| 1 | 25.4 | 200 | 255 | 40 | — | HDC00428 |
| 1¼ | 31.8 | 50 | 42 | 7 | HDC00429 | — |
| 1¼ | 31.8 | 125 | 106 | 17 | HDC00430 | HDC00431 |
| 1¼ | 31.8 | 180 | 153 | 24 | — | HDC00432 |
| 1¼ | 31.8 | 200 | 170 | 26 | — | HDC00433 |
| 1¼ | 31.8 | 250 | 212 | 33 | — | HDC00434 |
| 1½ | 38.1 | 50 | 32 | 5 | HDC00435 | — |
| 1½ | 38.1 | 150 | 95 | 15 | HDC00436 | HDC00437 |
| 1½ | 38.1 | 200 | 127 | 20 | HDC00438 | HDC00439 |
| 1¾ | 44.5 | 100 | 51 | 8 | HDC00440 | — |
| 1¾ | 44.5 | 200 | 102 | 16 | — | HDC00441 |
| 1¾ | 44.5 | 250 | 127 | 20 | HDC00442 | — |
| 1¾ | 44.5 | 400 | 204 | 32 | — | HDC00443 |
| 2 | 50.8 | 75 | 32 | 5 | HDC00444 | — |
| 2 | 50.8 | 100 | 52 | 8 | — | HDC22944 |
| 2 | 50.8 | 150 | 64 | 10 | HDC00445 | — |
| 2 | 50.8 | 175 | 74 | 12 | HDC00446 | — |
| 2 | 50.8 | 200 | 85 | 13 | HDC00447 | HDC00448 |
| 2 | 50.8 | 250 | 106 | 17 | HDC00449 | HDC00450 |
| 2 | 50.8 | 300 | 127 | 20 | HDC00451 | HDC00452 |
| 2 | 50.8 | 400 | 170 | 26 | HDC00453 | HDC00454 |
| 2 | 50.8 | 500 | 212 | 33 | HDC00455 | — |
| 2 | 50.8 | 600 | 255 | 40 | — | HDC00456 |
| 2 | 50.8 | 700 | 297 | 46 | — | HDC00457 |
| 2¼ | 57.2 | 75 | 27 | 4 | HDC00458 | — |
| 2¼ | 57.2 | 100 | 36 | 6 | HDC00459 | — |
| 2¼ | 57.2 | 125 | 45 | 7 | HDC00460 | — |
| 2¼ | 57.2 | 150 | 55 | 9 | HDC00461 | — |
| 2¼ | 57.2 | 250 | 91 | 14 | HDC00462 | HDC00463 |
| 2¼ | 57.2 | 300 | 109 | 17 | — | HDC00464 |
| 2¼ | 57.2 | 400 | 146 | 23 | HDC00465 | HDC00466 |
| 2¼ | 57.2 | 500 | 182 | 28 | HDC00467 | HDC00468 |
| 2½ | 60.3 | 100 | 34 | 5 | HDC00470 | HDC00471 |
| 2½ | 60.3 | 125 | 42 | 7 | HDC00472 | — |
| 2½ | 60.3 | 250 | 85 | 13 | HDC00473 | HDC00474 |
| 2½ | 60.3 | 400 | 136 | 21 | — | HDC00475 |
| 2½ | 60.3 | 500 | 170 | 26 | HDC00476 | HDC00477 |
| 2½ | 60.3 | 100 | 32 | 5 | HDC00478 | HDC00479 |
| 2½ | 63.5 | 125 | 40 | 6 | HDC00480 | — |
| 2½ | 63.5 | 150 | 48 | 7 | — | HDC00481 |
| 2½ | 63.5 | 200 | 64 | 10 | HDC00482 | HDC00483 |
| 2½ | 63.5 | 250 | 80 | 12 | HDC00484 | HDC00485 |
| 2½ | 63.5 | 300 | 95 | 15 | HDC00486 | HDC00487 |
| 2½ | 63.5 | 400 | 127 | 20 | HDC00489 | HDC00490 |
| 2½ | 63.5 | 500 | 159 | 25 | HDC00491 | HDC00492 |
| 2½ | 63.5 | 300 | 93 | 14 | — | HDC00493 |
| 2¾ | 65.1 | 350 | 108 | 17 | HDC00494 | — |
| 2¾ | 69.9 | 250 | 71 | 11 | HDC00495 | — |
| 2¾ | 69.9 | 400 | 113 | 18 | HDC00496 | HDC00497 |
| 3 | 76.2 | 125 | 32 | 5 | HDC00498 | HDC00499 |
| 3 | 76.2 | 150 | 38 | 6 | HDC00500 | HDC00501 |
| 3 | 76.2 | 200 | 51 | 8 | — | HDC00502 |
| 3 | 76.2 | 250 | 64 | 10 | HDC00503 | HDC00504 |
| 3 | 76.2 | 300 | 76 | 12 | HDC00505 | HDC00506 |
| 3 | 76.2 | 350 | 89 | 14 | HDC00507 | — |
| 3 | 76.2 | 400 | 102 | 16 | HDC00508 | HDC00509 |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 3 | 76.2 | 500 | 127 | 20 | HDC00510 | HDC00511 |
| 3 | 76.2 | 600 | 153 | 24 | HDC00512 | HDC00513 |
| 3 | 76.2 | 750 | 191 | 30 | HDC00514 | HDC00515 |
| 3 | 76.2 | 1000 | 255 | 40 | HDC00516 | — |
| 3½ | 88.9 | 250 | 53 | 8 | HDC00517 | HDC00518 |
| 3½ | 88.9 | 300 | 64 | 10 | — | HDC00519 |
| 3½ | 88.9 | 350 | 74 | 12 | — | HDC00520 |
| 3½ | 88.9 | 400 | 95 | 15 | — | HDC08472 |
| 3½ | 88.9 | 500 | 106 | 17 | HDC00522 | HDC00523 |
| 3½ | 88.9 | 750 | 159 | 25 | — | HDC00524 |
| 3½ | 88.9 | 1000 | 212 | 33 | — | HDC00525 |
| 3¾ | 95.3 | 500 | 98 | 15 | — | HDC00526 |
| 3⅞ | 96.8 | 250 | 48 | 8 | — | HDC00527 |
| 3⅞ | 96.8 | 500 | 96 | 15 | HDC00528 | — |
| 4 | 101.6 | 150 | 27 | 4 | HDC00529 | HDC00530 |
| 4 | 101.6 | 200 | 40 | 6 | — | HDC07555 |
| 4 | 101.6 | 250 | 45 | 7 | HDC00531 | HDC00532 |
| 4 | 101.6 | 300 | 55 | 9 | HDC00533 | HDC00534 |
| 4 | 101.6 | 350 | 64 | 10 | HDC00536 | HDC00537 |
| 4 | 101.6 | 400 | 73 | 11 | HDC00538 | HDC00539 |
| 4 | 101.6 | 500 | 91 | 14 | HDC00540 | HDC00541 |
| 4 | 101.6 | 550 | 100 | 16 | HDC00542 | HDC00543 |
| 4 | 101.6 | 600 | 109 | 17 | — | HDC00544 |
| 4 | 101.6 | 750 | 136 | 21 | HDC00545 | HDC00546 |
| 4 | 101.6 | 1000 | 182 | 28 | — | HDC00547 |
| 4 | 101.6 | 1200 | 218 | 34 | — | HDC00548 |
| 4½ | 109.5 | 550 | 92 | 14 | HDC00550 | — |
| 4½ | 114.3 | 250 | 40 | 6 | HDC00551 | — |
| 4½ | 114.3 | 350 | 56 | 9 | — | HDC00552 |
| 4½ | 114.3 | 500 | 80 | 12 | HDC00553 | HDC00554 |
| 4½ | 114.3 | 650 | 103 | 16 | HDC00555 | HDC00556 |
| 4½ | 114.3 | 750 | 119 | 19 | HDC00557 | HDC00558 |
| 4½ | 114.3 | 1000 | 159 | 25 | — | HDC00559 |
| 4¾ | 120.7 | 200 | 30 | 5 | — | HDC00560 |
| 4⅞ | 122.2 | 250 | 37 | 6 | HDC00561 | — |
| 4⅞ | 122.2 | 300 | 44 | 7 | — | HDC00562 |
| 4⅞ | 122.2 | 1000 | 148 | 23 | — | HDC00563 |
| 5 | 127.0 | 200 | 28 | 4 | HDC00565 | HDC00566 |
| 5 | 127.0 | 250 | 35 | 6 | HDC00567 | — |
| 5 | 127.0 | 300 | 42 | 7 | — | HDC00568 |
| 5 | 127.0 | 350 | 50 | 8 | HDC00569 | HDC00570 |
| 5 | 127.0 | 400 | 57 | 9 | HDC00571 | HDC00572 |
| 5 | 127.0 | 500 | 71 | 11 | HDC00573 | HDC00574 |
| 5 | 127.0 | 550 | 78 | 12 | — | HDC00575 |
| 5 | 127.0 | 600 | 85 | 13 | — | HDC00576 |
| 5 | 127.0 | 625 | 88 | 14 | — | HDC00577 |
| 5 | 127.0 | 750 | 106 | 17 | HDC00578 | HDC00579 |
| 5 | 127.0 | 800 | 113 | 18 | — | HDC00580 |
| 5 | 127.0 | 1000 | 141 | 22 | — | HDC00581 |
| 5¼ | 133.4 | 250 | 34 | 5 | HDC00582 | HDC00583 |
| 5¼ | 133.4 | 1000 | 134 | 21 | — | HDC00584 |
| 5½ | 139.7 | 200 | 25 | 4 | — | HDC00585 |
| 5½ | 139.7 | 500 | 64 | 10 | HDC00586 | HDC00587 |
| 5½ | 139.7 | 650 | 83 | 13 | — | HDC00588 |
| 5½ | 139.7 | 750 | 95 | 15 | HDC00589 | HDC00590 |
| 5¾ | 146.1 | 350 | 42 | 7 | — | HDC00591 |
| 5¾ | 146.1 | 700 | 85 | 13 | HDC00592 | HDC00593 |
| 5⅞ | 147.6 | 300 | 36 | 6 | — | HDC00594 |

Cartridge Heaters



Hi-Density

STOCK — Immediate Delivery through the **TERMINATOR** Lead Conversion Program



Continued from previous page...

1/2" Actual .496" (12.60 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination). Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 6 | 152.4 | 200 | 23 | 4 | — | HDC00595 |
| 6 | 152.4 | 250 | 29 | 5 | HDC00596 | HDC00597 |
| 6 | 152.4 | 300 | 35 | 5 | HDC00598 | HDC00599 |
| 6 | 152.4 | 350 | 41 | 6 | HDC00600 | HDC00601 |
| 6 | 152.4 | 450 | 52 | 8 | — | HDC00602 |
| 6 | 152.4 | 500 | 58 | 9 | HDC00603 | HDC00604 |
| 6 | 152.4 | 600 | 69 | 11 | — | HDC00605 |
| 6 | 152.4 | 750 | 87 | 14 | HDC00606 | HDC00607 |
| 6 | 152.4 | 850 | 98 | 15 | HDC00609 | HDC00610 |
| 6 | 152.4 | 875 | 101 | 16 | — | HDC00611 |
| 6 | 152.4 | 1000 | 116 | 18 | HDC00612 | HDC00613 |
| 6 | 152.4 | 1200 | 139 | 22 | — | HDC00614 |
| 6 | 152.4 | 1500 | 183 | 28 | — | HDC16228 |
| 6 1/8 | 161.9 | 1000 | 108 | 17 | — | HDC00615 |
| 6 1/2 | 165.1 | 500 | 53 | 8 | HDC00616 | HDC00617 |
| 6 1/2 | 165.1 | 1000 | 106 | 17 | — | HDC00618 |
| 6 3/4 | 171.5 | 500 | 51 | 8 | HDC00619 | HDC00620 |
| 7 | 177.8 | 250 | 24 | 4 | HDC00621 | — |
| 7 | 177.8 | 340 | 33 | 5 | — | HDC00622 |
| 7 | 177.8 | 400 | 39 | 6 | — | HDC00623 |
| 7 | 177.8 | 500 | 49 | 8 | HDC00624 | HDC00625 |
| 7 | 177.8 | 600 | 59 | 9 | HDC00626 | HDC00627 |
| 7 | 177.8 | 700 | 69 | 11 | — | HDC00628 |
| 7 | 177.8 | 750 | 73 | 11 | HDC00629 | HDC00630 |
| 7 | 177.8 | 1000 | 98 | 15 | HDC00631 | HDC00632 |
| 7 | 177.8 | 1500 | 147 | 23 | — | HDC00633 |
| 7 1/2 | 190.5 | 500 | 45 | 7 | HDC00634 | HDC00635 |
| 7 1/2 | 190.5 | 1000 | 91 | 14 | — | HDC00636 |
| 7 3/4 | 196.9 | 1000 | 88 | 14 | — | HDC00637 |
| 8 | 203.2 | 200 | 17 | 3 | — | HDC00639 |
| 8 | 203.2 | 300 | 25 | 4 | HDC00640 | HDC00641 |
| 8 | 203.2 | 500 | 42 | 7 | HDC00642 | HDC00643 |
| 8 | 203.2 | 600 | 51 | 8 | — | HDC00644 |
| 8 | 203.2 | 750 | 64 | 10 | HDC00645 | HDC00646 |
| 8 | 203.2 | 800 | 68 | 11 | HDC00647 | HDC00648 |
| 8 | 203.2 | 1000 | 85 | 13 | HDC00650 | HDC00651 |
| 8 | 203.2 | 1200 | 102 | 16 | — | HDC00653 |
| 8 | 203.2 | 1500 | 127 | 20 | — | HDC00654 |
| 8 | 203.2 | 2000 | 170 | 26 | — | HDC00655 |
| 8 1/2 | 215.9 | 300 | 24 | 4 | — | HDC00656 |
| 8 1/2 | 215.9 | 500 | 40 | 6 | — | HDC00657 |
| 8 1/2 | 215.9 | 1000 | 80 | 12 | HDC00658 | HDC00659 |
| 8 3/4 | 222.3 | 1000 | 77 | 12 | — | HDC00660 |
| 9 | 228.6 | 500 | 37 | 6 | — | HDC00661 |
| 9 | 228.6 | 750 | 56 | 9 | — | HDC00662 |
| 9 | 228.6 | 1000 | 75 | 12 | HDC00663 | HDC00664 |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 9 | 228.6 | 1325 | 99 | 15 | — | HDC00665 |
| 9 | 228.6 | 1500 | 112 | 17 | — | HDC00666 |
| 9 1/2 | 241.3 | 500 | 35 | 6 | — | HDC00667 |
| 9 1/2 | 241.3 | 800 | 57 | 9 | — | HDC00668 |
| 9 1/2 | 241.3 | 1000 | 71 | 11 | — | HDC00669 |
| 10 | 254.0 | 500 | 34 | 5 | HDC00670 | HDC00671 |
| 10 | 254.0 | 750 | 50 | 8 | — | HDC00672 |
| 10 | 254.0 | 800 | 54 | 8 | — | HDC00673 |
| 10 | 254.0 | 1000 | 67 | 10 | HDC00674 | HDC00675 |
| 10 | 254.0 | 1250 | 84 | 13 | — | HDC00677 |
| 10 | 254.0 | 1500 | 101 | 16 | — | HDC00678 |
| 10 | 254.0 | 2000 | 134 | 21 | — | HDC00679 |
| 10 1/2 | 266.7 | 1500 | 95 | 15 | — | HDC00680 |
| 11 | 279.4 | 500 | 30 | 5 | HDC00681 | — |
| 11 | 279.4 | 1000 | 61 | 9 | — | HDC00682 |
| 11 | 279.4 | 1500 | 91 | 14 | — | HDC00683 |
| 11 | 279.4 | 2000 | 121 | 19 | — | HDC00684 |
| 11 1/2 | 292.1 | 1525 | 88 | 14 | — | HDC00685 |
| 12 | 304.8 | 500 | 28 | 4 | HDC00686 | HDC00687 |
| 12 | 304.8 | 600 | 33 | 5 | HDC00688 | HDC00689 |
| 12 | 304.8 | 1000 | 55 | 9 | HDC00690 | HDC00691 |
| 12 | 304.8 | 1100 | 61 | 9 | — | HDC00692 |
| 12 | 304.8 | 1500 | 83 | 13 | — | HDC00693 |
| 12 | 304.8 | 2000 | 111 | 17 | — | HDC00694 |
| 12 1/2 | 317.5 | 1675 | 89 | 14 | — | HDC00695 |
| 13 1/2 | 342.9 | 500 | 24 | 4 | — | HDC00696 |
| 14 | 355.6 | 1000 | 47 | 7 | — | HDC00697 |
| 14 | 355.6 | 1700 | 80 | 12 | — | HDC00698 |
| 14 | 355.6 | 2300 | 108 | 17 | — | HDC00699 |
| 15 | 381.0 | 800 | 35 | 5 | — | HDC00700 |
| 15 | 381.0 | 1000 | 44 | 7 | — | HDC00701 |
| 15 | 381.0 | 1500 | 66 | 10 | — | HDC00702 |
| 15 | 381.0 | 2000 | 88 | 14 | — | HDC00703 |
| 16 | 406.4 | 800 | 33 | 5 | — | HDC00704 |
| 16 | 406.4 | 1000 | 41 | 6 | — | HDC00705 |
| 16 | 406.4 | 2000 | 84 | 13 | — | HDC17207 |
| 16 1/2 | 419.1 | 2200 | 88 | 14 | — | HDC00706 |
| 17 | 431.8 | 1000 | 39 | 6 | — | HDC00707 |
| 18 | 457.2 | 750 | 27 | 4 | — | HDC00708 |
| 18 | 457.2 | 1000 | 36 | 6 | — | HDC00709 |
| 18 | 457.2 | 1500 | 55 | 9 | — | HDC00710 |
| 18 | 457.2 | 1700 | 62 | 10 | — | HDC00711 |
| 18 | 457.2 | 2000 | 73 | 11 | — | HDC00712 |
| 20 | 508.0 | 1000 | 34 | 5 | — | HDC11652 |
| 24 | 609.6 | 1000 | 28 | 4 | — | HDC14867 |

Ordering Information

Order by Part Number for stock Cartridge heaters with Type N termination. Call Tempco for part numbers for stock heaters with other Terminator Program terminations and options (see pages 2-12 & 2-13).

Custom Engineered/Manufactured

Cartridge Heaters can be application specific; therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

STOCK — Immediate Delivery through the **TERMINATOR** Lead Conversion Program

5/8" Actual .621" (15.77 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination).
Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 1¼ | 31.8 | 50 | 34 | 5 | HDC00713 | — |
| 1¼ | 31.8 | 200 | 136 | 21 | HDC00714 | HDC00715 |
| 1¼ | 31.8 | 250 | 170 | 26 | HDC00716 | HDC00717 |
| 1½ | 38.1 | 250 | 127 | 20 | HDC00719 | HDC00720 |
| 2 | 50.8 | 100 | 34 | 5 | HDC00721 | — |
| 2 | 50.8 | 125 | 42 | 7 | HDC00722 | — |
| 2 | 50.8 | 200 | 68 | 11 | HDC00723 | HDC00724 |
| 2 | 50.8 | 250 | 85 | 13 | HDC00725 | HDC00726 |
| 2 | 50.8 | 300 | 102 | 16 | — | HDC00727 |
| 2 | 50.8 | 400 | 136 | 21 | — | HDC00728 |
| 2 | 50.8 | 500 | 170 | 26 | — | HDC00729 |
| 2 | 50.8 | 750 | 255 | 40 | — | HDC00730 |
| 2¼ | 57.2 | 100 | 29 | 5 | HDC00731 | — |
| 2¼ | 57.2 | 125 | 36 | 6 | HDC00732 | — |
| 2¼ | 57.2 | 250 | 73 | 11 | HDC00733 | HDC00734 |
| 2¼ | 57.2 | 350 | 102 | 16 | HDC00735 | HDC00736 |
| 2½ | 60.3 | 280 | 76 | 12 | HDC00739 | HDC00740 |
| 2½ | 63.5 | 180 | 46 | 7 | HDC00742 | — |
| 2½ | 63.5 | 275 | 70 | 11 | HDC00743 | HDC00744 |
| 2½ | 63.5 | 400 | 102 | 16 | HDC00745 | HDC00746 |
| 2½ | 63.5 | 720 | 183 | 28 | — | HDC00747 |
| 3 | 76.2 | 150 | 31 | 5 | HDC00748 | — |
| 3 | 76.2 | 180 | 37 | 6 | HDC00749 | — |
| 3 | 76.2 | 250 | 51 | 8 | HDC00750 | HDC00751 |
| 3 | 76.2 | 350 | 71 | 11 | HDC00752 | HDC00753 |
| 3 | 76.2 | 400 | 81 | 13 | HDC00754 | — |
| 3 | 76.2 | 500 | 102 | 16 | HDC00755 | HDC00756 |
| 3 | 76.2 | 600 | 122 | 19 | — | HDC00757 |
| 3 | 76.2 | 720 | 147 | 23 | — | HDC00758 |
| 3 | 76.2 | 750 | 153 | 24 | — | HDC00759 |
| 3¼ | 82.6 | 200 | 37 | 6 | HDC00760 | — |
| 3¼ | 82.6 | 800 | 148 | 23 | — | HDC00761 |
| 3½ | 88.9 | 525 | 89 | 14 | — | HDC00762 |
| 3¾ | 95.3 | 525 | 82 | 13 | HDC00763 | HDC00764 |
| 4 | 101.6 | 250 | 36 | 6 | HDC00766 | HDC00767 |
| 4 | 101.6 | 300 | 44 | 7 | — | HDC00768 |
| 4 | 101.6 | 350 | 51 | 8 | HDC00769 | — |
| 4 | 101.6 | 400 | 58 | 9 | — | HDC00770 |
| 4 | 101.6 | 500 | 73 | 11 | HDC00771 | HDC00772 |
| 4 | 101.6 | 550 | 80 | 12 | — | HDC00773 |
| 4 | 101.6 | 600 | 87 | 14 | — | HDC00774 |
| 4 | 101.6 | 750 | 109 | 17 | HDC00775 | HDC00776 |
| 4 | 101.6 | 1000 | 146 | 23 | — | HDC00777 |
| 4½ | 114.3 | 500 | 64 | 10 | — | HDC00780 |
| 4½ | 114.3 | 750 | 95 | 15 | HDC00783 | HDC00784 |
| 4½ | 114.3 | 1000 | 127 | 20 | — | HDC00785 |
| 4¾ | 120.7 | 750 | 90 | 14 | — | HDC00787 |
| 5 | 127.0 | 250 | 28 | 4 | HDC00788 | HDC00789 |
| 5 | 127.0 | 500 | 57 | 9 | — | HDC00790 |
| 5 | 127.0 | 750 | 85 | 13 | HDC00791 | HDC00792 |
| 5 | 127.0 | 875 | 99 | 15 | — | HDC00793 |
| 5 | 127.0 | 1000 | 113 | 18 | HDC00794 | HDC00795 |
| 5¾ | 136.5 | 800 | 84 | 13 | HDC00796 | HDC00797 |
| 5½ | 139.7 | 800 | 81 | 13 | — | HDC00800 |
| 5¾ | 146.1 | 500 | 49 | 8 | — | HDC00801 |
| 5¾ | 146.1 | 1500 | 146 | 23 | — | HDC00802 |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 6 | 152.4 | 300 | 28 | 4 | HDC00804 | HDC00805 |
| 6 | 152.4 | 500 | 46 | 7 | HDC00806 | HDC00807 |
| 6 | 152.4 | 750 | 69 | 11 | — | HDC00808 |
| 6 | 152.4 | 1000 | 93 | 14 | HDC00809 | HDC00810 |
| 6 | 152.4 | 1200 | 111 | 17 | — | HDC00811 |
| 6 | 152.4 | 1500 | 139 | 22 | HDC00812 | HDC00813 |
| 6½ | 165.1 | 350 | 30 | 5 | HDC00814 | HDC00815 |
| 6½ | 165.1 | 500 | 42 | 7 | HDC00816 | HDC00817 |
| 6½ | 165.1 | 900 | 76 | 12 | — | HDC00818 |
| 6½ | 165.1 | 1400 | 119 | 18 | — | HDC00819 |
| 6¾ | 171.5 | 500 | 41 | 6 | — | HDC00820 |
| 6¾ | 171.5 | 1000 | 81 | 13 | — | HDC00821 |
| 7 | 177.8 | 500 | 39 | 6 | HDC00822 | HDC00823 |
| 7 | 177.8 | 750 | 59 | 9 | — | HDC00824 |
| 7 | 177.8 | 1000 | 78 | 12 | HDC00825 | HDC00826 |
| 7 | 177.8 | 1500 | 118 | 18 | — | HDC00827 |
| 7½ | 190.5 | 325 | 24 | 4 | HDC00828 | — |
| 7½ | 190.5 | 1300 | 95 | 15 | — | HDC00829 |
| 7¾ | 196.9 | 400 | 28 | 4 | — | HDC00830 |
| 7¾ | 196.9 | 1000 | 70 | 11 | — | HDC00831 |
| 8 | 203.2 | 400 | 27 | 4 | — | HDC00832 |
| 8 | 203.2 | 500 | 34 | 5 | HDC00833 | HDC00834 |
| 8 | 203.2 | 750 | 51 | 8 | — | HDC00835 |
| 8 | 203.2 | 850 | 58 | 9 | — | HDC00836 |
| 8 | 203.2 | 1000 | 68 | 11 | HDC00837 | HDC00838 |
| 8 | 203.2 | 1200 | 81 | 13 | HDC00839 | HDC00840 |
| 8 | 203.2 | 1500 | 102 | 16 | HDC00841 | HDC00842 |
| 8 | 203.2 | 2000 | 136 | 21 | — | HDC00843 |
| 8¾ | 222.3 | 450 | 28 | 4 | HDC00845 | — |
| 8¾ | 222.3 | 1800 | 111 | 17 | — | HDC00846 |
| 9 | 228.6 | 500 | 30 | 5 | — | HDC00847 |
| 9 | 228.6 | 750 | 45 | 7 | — | HDC00848 |
| 9 | 228.6 | 1000 | 60 | 9 | — | HDC00849 |
| 9 | 228.6 | 1500 | 90 | 14 | — | HDC00850 |
| 9½ | 241.3 | 975 | 55 | 9 | — | HDC00851 |
| 10 | 254.0 | 500 | 27 | 4 | HDC00852 | HDC00853 |
| 10 | 254.0 | 650 | 35 | 5 | HDC00855 | — |
| 10 | 254.0 | 750 | 40 | 6 | — | HDC00856 |
| 10 | 254.0 | 800 | 43 | 7 | — | HDC00857 |
| 10 | 254.0 | 1000 | 54 | 8 | HDC00858 | HDC00859 |
| 10 | 254.0 | 1500 | 80 | 13 | HDC00860 | HDC00861 |
| 10 | 254.0 | 2000 | 107 | 17 | — | HDC00862 |
| 11 | 279.4 | 1000 | 49 | 8 | — | HDC00863 |
| 11 | 279.4 | 1400 | 68 | 11 | — | HDC00864 |
| 11 | 279.4 | 2000 | 97 | 15 | — | HDC00865 |
| 12 | 304.8 | 500 | 22 | 3 | HDC00866 | HDC00867 |
| 12 | 304.8 | 600 | 27 | 4 | HDC00868 | — |
| 12 | 304.8 | 775 | 34 | 5 | — | HDC00869 |
| 12 | 304.8 | 900 | 40 | 6 | — | HDC00870 |
| 12 | 304.8 | 1000 | 44 | 7 | HDC00871 | HDC00872 |
| 12 | 304.8 | 1500 | 66 | 10 | HDC00873 | HDC00874 |
| 12 | 304.8 | 2000 | 89 | 14 | — | HDC00875 |
| 13 | 330.2 | 1000 | 41 | 6 | — | HDC00876 |
| 13 | 330.2 | 1500 | 61 | 10 | — | HDC00877 |
| 14 | 355.6 | 925 | 35 | 5 | HDC00878 | — |
| 14 | 355.6 | 1000 | 38 | 6 | — | HDC00879 |

Cartridge Heaters



Hi-Density

STOCK — Immediate Delivery through the **TERMINATOR** Lead Conversion Program



Continued from previous page...

5/8" Actual .621" (15.77 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination). Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 14 | 355.6 | 1500 | 57 | 9 | — | HDC00880 |
| 14 | 355.6 | 3700 | 140 | 22 | — | HDC00881 |
| 15 | 381.0 | 750 | 26 | 4 | — | HDC00882 |
| 15 | 381.0 | 1000 | 35 | 5 | — | HDC00883 |
| 15 | 381.0 | 2400 | 84 | 13 | — | HDC00884 |
| 15 | 381.0 | 4000 | 140 | 22 | — | HDC00885 |
| 16 | 406.4 | 1000 | 33 | 5 | — | HDC00886 |
| 16 | 406.4 | 2500 | 82 | 13 | — | HDC00887 |
| 16 | 406.4 | 4500 | 148 | 23 | — | HDC00888 |
| 17 | 431.8 | 1000 | 31 | 5 | — | HDC00889 |
| 18 | 457.2 | 900 | 26 | 4 | — | HDC00890 |
| 18 | 457.2 | 1000 | 29 | 5 | — | HDC00891 |
| 18 | 457.2 | 1500 | 44 | 7 | — | HDC00892 |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 18 | 457.2 | 3000 | 87 | 14 | — | HDC00893 |
| 18 | 457.2 | 4700 | 137 | 21 | — | HDC00894 |
| 19 | 482.6 | 1000 | 28 | 4 | — | HDC00895 |
| 20 | 508.0 | 1000 | 26 | 4 | — | HDC00896 |
| 20 | 508.0 | 1500 | 39 | 6 | — | HDC00897 |
| 20 | 508.0 | 3500 | 91 | 14 | — | HDC00898 |
| 20 | 508.0 | 4700 | 123 | 19 | — | HDC00899 |
| 24 | 609.6 | 1000 | 22 | 3 | — | HDC00900 |
| 24 | 609.6 | 2000 | 43 | 7 | — | HDC00901 |
| 24 | 609.6 | 4700 | 102 | 16 | — | HDC00902 |
| 25¼ | 641.4 | 1500 | 31 | 5 | — | HDC00903 |
| 30 | 762.0 | 2800 | 48 | 8 | — | HDC00904 |
| 36 | 914.4 | 3000 | 43 | 7 | — | HDC00905 |

3/4" Actual .746" (18.95 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination). Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 2 | 50.8 | 200 | 57 | 9 | HDC00906 | — |
| 2 | 50.8 | 800 | 226 | 35 | — | HDC00907 |
| 2¼ | 57.2 | 200 | 49 | 8 | HDC00908 | — |
| 2¼ | 57.2 | 800 | 194 | 30 | — | HDC00909 |
| 3 | 76.2 | 250 | 42 | 7 | HDC00910 | — |
| 3 | 76.2 | 500 | 85 | 13 | HDC00911 | HDC00912 |
| 3 | 76.2 | 600 | 102 | 16 | HDC00913 | HDC00914 |
| 3 | 76.2 | 1000 | 170 | 26 | — | HDC00915 |
| 3½ | 88.9 | 250 | 35 | 6 | HDC00916 | HDC00917 |
| 3½ | 88.9 | 350 | 50 | 8 | — | HDC00918 |
| 3½ | 88.9 | 500 | 71 | 11 | HDC00919 | — |
| 3½ | 88.9 | 1000 | 141 | 22 | — | HDC00920 |
| 3¾ | 95.3 | 250 | 33 | 5 | HDC00921 | — |
| 3¾ | 95.3 | 500 | 65 | 10 | — | HDC00922 |
| 3¾ | 95.3 | 1000 | 131 | 20 | — | HDC00923 |
| 4 | 101.6 | 250 | 30 | 5 | HDC00924 | — |
| 4 | 101.6 | 500 | 61 | 9 | HDC00926 | HDC00927 |
| 4 | 101.6 | 750 | 91 | 14 | — | HDC00928 |
| 4 | 101.6 | 1000 | 121 | 19 | HDC00929 | HDC00930 |
| 4½ | 114.3 | 350 | 37 | 6 | HDC00931 | — |
| 4½ | 114.3 | 875 | 93 | 14 | HDC00932 | HDC00933 |
| 4½ | 114.3 | 1400 | 149 | 23 | — | HDC00934 |
| 4¾ | 120.7 | 750 | 75 | 12 | — | HDC00935 |
| 5 | 127.0 | 300 | 28 | 4 | HDC00936 | HDC00937 |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 5 | 127.0 | 500 | 47 | 7 | — | HDC00938 |
| 5 | 127.0 | 750 | 71 | 11 | — | HDC00939 |
| 5 | 127.0 | 1000 | 94 | 15 | HDC00940 | — |
| 5 | 127.0 | 1200 | 113 | 18 | — | HDC00942 |
| 5¾ | 146.1 | 1000 | 81 | 13 | — | HDC00943 |
| 6 | 152.4 | 500 | 39 | 6 | HDC00944 | HDC00945 |
| 6 | 152.4 | 750 | 58 | 9 | — | HDC00946 |
| 6 | 152.4 | 1000 | 77 | 12 | HDC00947 | HDC00948 |
| 6 | 152.4 | 1200 | 93 | 14 | — | HDC00949 |
| 6 | 152.4 | 1500 | 116 | 18 | — | HDC00950 |
| 6 | 152.4 | 2000 | 154 | 24 | — | HDC00951 |
| 7 | 177.8 | 500 | 33 | 5 | HDC00952 | HDC00953 |
| 7 | 177.8 | 1000 | 65 | 10 | HDC00954 | HDC00955 |
| 7 | 177.8 | 1500 | 98 | 15 | HDC00956 | HDC00957 |
| 7 | 177.8 | 2000 | 131 | 20 | — | HDC00958 |
| 7¾ | 193.7 | 450 | 27 | 4 | — | HDC00959 |
| 8 | 203.2 | 350 | 20 | 3 | — | HDC00961 |
| 8 | 203.2 | 500 | 28 | 4 | HDC00962 | HDC00963 |
| 8 | 203.2 | 700 | 40 | 6 | — | HDC00964 |
| 8 | 203.2 | 1000 | 57 | 9 | — | HDC00965 |
| 8 | 203.2 | 1350 | 76 | 12 | — | HDC00966 |
| 8 | 203.2 | 2000 | 113 | 18 | HDC00967 | HDC00968 |
| 9 | 228.6 | 350 | 17 | 3 | — | HDC00969 |
| 9 | 228.6 | 500 | 25 | 4 | — | HDC00970 |

Ordering Information

Order by Part Number for stock Cartridge heaters with Type N termination. Call Tempco for part numbers for stock heaters with other Terminator Program terminations and options (see pages 2-12 & 2-13).

Custom Engineered/Manufactured

Cartridge Heaters can be application specific; therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

STOCK — Immediate Delivery through the  Lead Conversion Program

3/4" Actual .746" (18.95 mm) Diameter Hi-Density Cartridge Heaters

Part Numbers listed are for stock Cartridge Heaters terminated with 10 inch long leads (Type N Termination). Other Terminator Program terminations and options can also be applied to stock heaters (see Ordering Information).

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 9 | 228.6 | 1000 | 53 | 8 | — | HDC22945 |
| 9 | 228.6 | 1200 | 60 | 9 | — | HDC00971 |
| 9 | 228.6 | 1800 | 90 | 14 | — | HDC00973 |
| 9¾ | 247.7 | 2000 | 92 | 14 | — | HDC00974 |
| 10 | 254.0 | 600 | 27 | 4 | — | HDC00975 |
| 10 | 254.0 | 1000 | 45 | 7 | — | HDC00976 |
| 10 | 254.0 | 1200 | 54 | 8 | — | HDC00977 |
| 10 | 254.0 | 1500 | 70 | 11 | — | HDC22946 |
| 10 | 254.0 | 2000 | 89 | 14 | HDC00978 | HDC00979 |
| 10½ | 266.7 | 550 | 23 | 4 | — | HDC00980 |
| 11 | 279.4 | 1000 | 40 | 6 | — | HDC00981 |
| 11¾ | 298.5 | 2000 | 75 | 12 | — | HDC00983 |
| 12 | 304.8 | 800 | 30 | 5 | — | HDC00984 |
| 12 | 304.8 | 1000 | 37 | 6 | — | HDC00985 |
| 12 | 304.8 | 1200 | 44 | 7 | — | HDC00986 |
| 12 | 304.8 | 1500 | 55 | 9 | — | HDC00987 |
| 12 | 304.8 | 2000 | 74 | 11 | HDC00988 | HDC00989 |
| 12 | 304.8 | 2500 | 92 | 14 | — | HDC00990 |
| 12 | 304.8 | 4000 | 148 | 23 | — | HDC00991 |
| 13 | 330.2 | 1000 | 34 | 5 | — | HDC00992 |
| 14 | 355.6 | 800 | 25 | 4 | — | HDC00993 |
| 14 | 355.6 | 1000 | 31 | 5 | — | HDC00994 |
| 14 | 355.6 | 1125 | 35 | 6 | HDC00995 | — |
| 14 | 355.6 | 1250 | 39 | 6 | — | HDC00996 |
| 14 | 355.6 | 1400 | 44 | 7 | — | HDC00997 |
| 14 | 355.6 | 2500 | 79 | 12 | — | HDC00998 |
| 14 | 355.6 | 4500 | 141 | 22 | — | HDC00999 |
| 14¾ | 374.7 | 1500 | 45 | 7 | — | HDC01000 |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 15 | 381.0 | 1000 | 29 | 5 | — | HDC01001 |
| 15 | 381.0 | 1500 | 44 | 7 | — | HDC01002 |
| 16 | 406.4 | 1000 | 27 | 4 | — | HDC01003 |
| 16 | 406.4 | 1175 | 32 | 5 | HDC01004 | — |
| 16 | 406.4 | 1500 | 41 | 6 | — | HDC01005 |
| 16 | 406.4 | 1800 | 49 | 8 | — | HDC01006 |
| 16 | 406.4 | 3000 | 82 | 13 | — | HDC01007 |
| 16 | 406.4 | 4700 | 129 | 20 | — | HDC01008 |
| 17 | 431.8 | 1000 | 26 | 4 | — | HDC01009 |
| 17¾ | 450.9 | 850 | 21 | 3 | — | HDC01010 |
| 18 | 457.2 | 1000 | 24 | 4 | — | HDC01011 |
| 18 | 457.2 | 1250 | 30 | 5 | HDC01012 | — |
| 18 | 457.2 | 1450 | 35 | 6 | — | HDC01013 |
| 18 | 457.2 | 2000 | 49 | 8 | — | HDC01014 |
| 18 | 457.2 | 3250 | 79 | 12 | — | HDC01015 |
| 18 | 457.2 | 5000 | 121 | 19 | — | HDC01016 |
| 19 | 482.6 | 1000 | 23 | 4 | — | HDC01017 |
| 20 | 508.0 | 1000 | 22 | 4 | — | HDC01018 |
| 20 | 508.0 | 1150 | 25 | 4 | — | HDC01019 |
| 20 | 508.0 | 2050 | 45 | 7 | — | HDC01020 |
| 20 | 508.0 | 2250 | 49 | 8 | — | HDC01021 |
| 20 | 508.0 | 5250 | 114 | 18 | — | HDC01022 |
| 24 | 609.6 | 1000 | 18 | 3 | — | HDC01023 |
| 24 | 609.6 | 1375 | 25 | 4 | — | HDC01024 |
| 24 | 609.6 | 2000 | 36 | 6 | — | HDC01025 |
| 24 | 609.6 | 2750 | 50 | 8 | — | HDC01026 |
| 24 | 609.6 | 5500 | 99 | 15 | — | HDC01027 |
| 36 | 914.4 | 2500 | 30 | 5 | — | HDC01028 |

Ordering Information

Order by Part Number for stock Cartridge heaters with Type N termination. Call Tempco for part numbers for stock heaters with other Terminator Program terminations and options (see pages 2-12 & 2-13).

Custom Engineered/Manufactured

Cartridge Heaters can be application specific; therefore for sizes, electrical ratings, terminations and any other design features not listed in this catalog **TEMPCO** will custom manufacture to your specifications. Consult us with your requirements.

1" Dia. Actual .996" (25.30 mm) Hi-Density Cartridge Heaters with Type N termination 10" leads

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|-------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 3 | 76.2 | 750 | 101 | 16 | — | HDC02662 |
| 3½ | 88.9 | 565 | 63 | 10 | — | HDC02663 |
| 5 | 127.0 | 1000 | 73 | 11 | — | HDC02664 |
| 7¾ | 200.0 | 500 | 22 | 3 | HDC02665 | HDC02666 |
| 8 | 203.2 | 1500 | 65 | 10 | — | HDC02667 |
| 8¾ | 222.3 | 875 | 34 | 5 | — | HDC02668 |
| 11½ | 292.1 | 1000 | 29 | 5 | HDC02669 | — |
| 13 | 330.2 | 1000 | 26 | 4 | HDC02670 | — |
| 14 | 355.6 | 2700 | 64 | 10 | — | HDC02671 |
| 15 | 381.0 | 1000 | 22 | 3 | HDC02672 | — |

| Sheath Length | | Watts | Watt Density | | Part Number | |
|---------------|--------|-------|-------------------|-------------------|-------------|----------|
| in | mm | | W/in ² | W/cm ² | 120V | 240V |
| 16 | 406.4 | 1800 | 37 | 6 | — | HDC02673 |
| 17¾ | 441.3 | 2400 | 46 | 7 | — | HDC02674 |
| 20 | 508.0 | 1000 | 16 | 3 | — | HDC02675 |
| 20 | 508.0 | 2800 | 46 | 7 | — | HDC02676 |
| 25 | 635.0 | 1725 | 23 | 3 | HDC02677 | HDC02678 |
| 40 | 1016.0 | 4400 | 36 | 6 | — | HDC02679 |
| 49 | 1244.6 | 3725 | 25 | 4 | — | HDC02680 |
| 50½ | 1282.7 | 945 | 6 | 1 | — | HDC02681 |
| 57 | 1447.8 | 2800 | 16 | 3 | — | HDC02682 |
| 60 | 1524.0 | 1500 | 8 | 1 | — | HDC02683 |




Note: 1" Dia. Hi-Density Cartridge Heaters are made-to-order only. Refer to ordering information on page 2-3. **Standard lead time is 3 weeks.**

Cartridge Heaters



Type F Terminated Stock Heaters

STOCK Cartridge Heaters with Type F Flexible Lead Termination

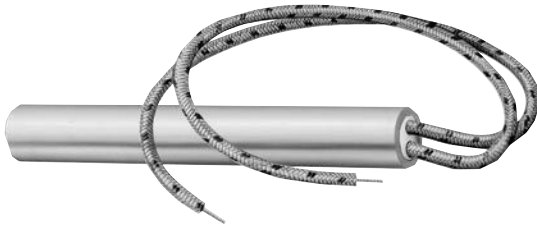

Type F Internally Connected Flexible Leads 10" Long

This lead termination provides flexibility; the lead wires are internally connected to the terminal pins. The lead wires can be sharply bent as they exit the ceramic insulating cap without exposing the bare wire.

1/4" Diameter Actual .246" (6.25 mm)

| Sheath Length | | Watts | Volts | Watt Density | | Part Number |
|---------------|-------|-------|-------|-------------------|-------------------|-------------|
| in | mm | | | W/in ² | W/cm ² | |
| 1 | 25.4 | 80 | 120 | 204 | 32 | HDC05603 |
| 1½ | 38.1 | 50 | 120 | 64 | 10 | HDC06151 |
| 1½ | 38.1 | 200 | 120 | 255 | 40 | HDC10869 |
| 2 | 50.8 | 200 | 240 | 170 | 26 | HDC01989 |
| 2 | 50.8 | 250 | 240 | 212 | 33 | HDC05179 |
| 2 | 50.8 | 300 | 240 | 255 | 40 | HDC04556 |
| 2½ | 63.5 | 300 | 240 | 191 | 30 | HDC07119 |
| 3 | 76.2 | 75 | 120 | 38 | 6 | HDC10412 |
| 3 | 76.2 | 300 | 240 | 153 | 24 | HDC04490 |
| 4 | 101.6 | 400 | 240 | 146 | 23 | HDC04200 |
| 5¼ | 146.1 | 350 | 120 | 94 | 15 | HDC04732 |

3/8" Diameter Actual .371" (9.42 mm)

| Sheath Length | | Watts | Volts | Watt Density | | Part Number |
|---------------|-------|-------|-------|-------------------|-------------------|-------------|
| in | mm | | | W/in ² | W/cm ² | |
| ¼ | 31.8 | 150 | 240 | 170 | 26 | HDC06254 |
| ¼ | 31.8 | 200 | 240 | 226 | 35 | HDC04349 |
| ½ | 31.8 | 250 | 120 | 212 | 33 | HDC04402 |
| 2 | 50.8 | 250 | 240 | 141 | 22 | HDC04291 |
| 2 | 50.8 | 350 | 240 | 198 | 31 | HDC11345 |
| 2½ | 63.5 | 250 | 240 | 106 | 16 | HDC07496 |
| 2½ | 63.5 | 350 | 240 | 149 | 23 | HDC04759 |
| 2½ | 63.5 | 500 | 240 | 212 | 33 | HDC05359 |
| 3 | 76.2 | 300 | 240 | 102 | 16 | HDC02094 |
| 3 | 76.2 | 375 | 240 | 127 | 20 | HDC06779 |
| 3½ | 88.9 | 350 | 240 | 99 | 15 | HDC04861 |
| 4 | 101.6 | 400 | 120 | 97 | 15 | HDC04560 |
| 4 | 101.6 | 500 | 240 | 121 | 19 | HDC04552 |
| 5½ | 139.7 | 1000 | 240 | 170 | 26 | HDC05431 |
| 7 | 177.8 | 350 | 240 | 46 | 7 | HDC05303 |
| 12 | 304.8 | 1000 | 240 | 74 | 11 | HDC05833 |

1/2" Diameter Actual .496" (12.60 mm)

| Sheath Length | | Watts | Volts | Watt Density | | Part Number |
|---------------|-------|-------|-------|-------------------|-------------------|-------------|
| in | mm | | | W/in ² | W/cm ² | |
| 2 | 50.8 | 300 | 240 | 127 | 20 | HDC03872 |
| 3¼ | 79.4 | 500 | 240 | 121 | 19 | HDC11162 |
| 3¼ | 96.8 | 250 | 240 | 48 | 7 | HDC10330 |
| 4 | 101.6 | 500 | 240 | 91 | 14 | HDC04676 |
| 4 | 101.6 | 600 | 240 | 109 | 17 | HDC03878 |
| 5 | 127 | 500 | 240 | 71 | 11 | HDC04701 |
| 6 | 152.4 | 500 | 240 | 58 | 9 | HDC04677 |
| 6 | 152.4 | 750 | 240 | 87 | 14 | HDC04352 |
| 6 | 152.4 | 1000 | 240 | 116 | 18 | HDC03887 |
| 7 | 177.8 | 750 | 240 | 73 | 11 | HDC03893 |
| 8 | 203.2 | 500 | 240 | 42 | 7 | HDC02265 |
| 8 | 203.2 | 1000 | 240 | 85 | 13 | HDC02263 |
| 10 | 254 | 1000 | 240 | 67 | 10 | HDC04220 |

5/8" Diameter Actual .621" (15.77 mm)

| Sheath Length | | Watts | Volts | Watt Density | | Part Number |
|---------------|-------|-------|-------|-------------------|-------------------|-------------|
| in | mm | | | W/in ² | W/cm ² | |
| 3 | 76.2 | 750 | 240 | 153 | 24 | HDC04483 |
| 6 | 152.4 | 600 | 240 | 56 | 9 | HDC11240 |
| 6 | 152.4 | 1000 | 240 | 93 | 14 | HDC07353 |

All Items Available from Stock




Note: Custom Engineered/Manufactured Hi-Density Cartridge Heaters with Type F Flexible Lead Termination
Refer to ordering information on page 2-3.

Standard Size Stock Type CM 1/2" & 3/4" NPT Screw Plug Hi-Density Cartridge Immersion Heaters

Hi-Density Cartridge Immersion Heaters are designed for heating water and other liquids. The high watt density capability of this heater permits greater heat dissipation in a given area than would a tubular immersion heater.

However, it is important to note that allowable watt density depends on the material being heated. For water heating, watt densities of several hundred watts per square inch are possible; oil heating may be limited to 5 to 20 watts per square inch.

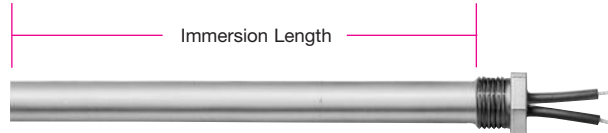

Design Features

- * Passivated Incoloy® Sheath
- * 10" long Teflon® Insulated Lead Wires
- * Brass Fitting
- * Epoxy Seal at Lead End
266°F (130°C) Standard
UL Rating 194°F (90°C)



Note: See pages 2-50 & 2-51 for other fitting options

| Diameter | Heater Immersion Length | | Watts | Watt Density | | Part Number | | |
|----------------------|-------------------------|-------|-------|-------------------|-------------------|-------------|----------|----------|
| | in | mm | | W/in ² | W/cm ² | 120V | 240V | 480V |
| 5/8" Incoloy® Sheath | 1½ | 38.1 | 100 | 41 | 6 | HDL00001 | — | — |
| | 1½ | 38.1 | 400 | 163 | 25 | — | HDL00002 | — |
| | 3½ | 88.9 | 250 | 39 | 6 | HDL00003 | HDL00004 | — |
| | 3½ | 88.9 | 1000 | 157 | 24 | — | HDL00005 | HDL00006 |
| 1/2 NPT Fitting | 7⅞ | 200.0 | 500 | 33 | 5 | HDL00007 | HDL00008 | — |
| | 7⅞ | 200.0 | 2000 | 134 | 21 | — | HDL00009 | HDL00010 |
| | 12 | 304.8 | 750 | 33 | 5 | HDL00011 | HDL00012 | — |
| | 12 | 304.8 | 3000 | 130 | 20 | — | HDL00013 | HDL00014 |
| 3/4" Incoloy® Sheath | 4¼ | 108.0 | 500 | 53 | 8 | HDL00015 | HDL00016 | — |
| | 4¼ | 108.0 | 750 | 80 | 12 | HDL00017 | HDL00018 | — |
| | 4¼ | 108.0 | 1000 | 106 | 16 | HDL00019 | HDL00020 | — |
| | 4⅞ | 117.5 | 300 | 29 | 5 | HDL00021 | HDL00022 | — |
| | 4⅞ | 117.5 | 1200 | 116 | 18 | — | HDL00023 | HDL00024 |
| | 4⅞ | 120.7 | 375 | 35 | 5 | HDL00025 | HDL00026 | — |
| | 4⅞ | 120.7 | 1500 | 141 | 22 | — | HDL00027 | HDL00028 |
| | 5¼ | 146.1 | 500 | 39 | 6 | HDL00029 | HDL00030 | — |
| | 5¼ | 146.1 | 2000 | 154 | 24 | — | HDL00031 | HDL00032 |
| | 6¼ | 158.8 | 500 | 35 | 5 | HDL00033 | HDL00034 | — |
| | 6¼ | 158.8 | 2000 | 141 | 22 | — | HDL00035 | HDL00036 |
| | 6¼ | 165.1 | 625 | 42 | 7 | HDL00037 | HDL00038 | — |
| 3/4 NPT Fitting | 6½ | 165.1 | 2500 | 170 | 26 | — | HDL00039 | HDL00040 |
| | 7¼ | 184.2 | 750 | 45 | 7 | HDL00041 | HDL00042 | — |
| | 7¼ | 184.2 | 3000 | 182 | 28 | — | HDL00043 | HDL00044 |
| | 9 | 228.6 | 1000 | 49 | 8 | HDL00045 | HDL00046 | — |
| | 9 | 228.6 | 4000 | 194 | 30 | — | HDL00047 | HDL00048 |
| | 10½ | 266.7 | 750 | 31 | 5 | HDL00049 | HDL00050 | — |
| | 10½ | 266.7 | 3000 | 124 | 19 | — | HDL00051 | HDL00052 |
| | 10¾ | 273.1 | 1250 | 51 | 8 | HDL00053 | HDL00054 | — |
| | 10¾ | 273.1 | 5000 | 202 | 31 | — | HDL00055 | HDL00056 |
| | 12½ | 317.5 | 1500 | 52 | 8 | — | HDL00057 | — |
| 12½ | 317.5 | 6000 | 208 | 32 | — | — | HDL00058 | |
| 13⅞ | 346.1 | 1000 | 32 | 5 | HDL00059 | HDL00060 | — | |
| 13⅞ | 346.1 | 4000 | 127 | 20 | — | HDL00061 | HDL00062 | |
| 16 | 406.4 | 2000 | 54 | 8 | — | HDL00063 | — | |
| 16 | 406.4 | 8000 | 216 | 33 | — | — | HDL00064 | |
| 19¼ | 489.0 | 2500 | 56 | 9 | — | HDL00065 | — | |
| 19¼ | 489.0 | 10000 | 223 | 35 | — | — | HDL00066 | |

Ordering Information

Stock Heaters

Part Numbers listed above are for 1/2" and 3/4" NPT Brass Screw Plug Cartridge Immersion Heaters with Type CM termination and 10" long leads. **Standard lead time is 72 hours.**

Custom Engineered/Manufactured Heaters

Because an electric heater can be very application specific, for sizes and ratings not listed, **TEMPCO** will design and manufacture a Cartridge Immersion Heater to meet your requirements. **Standard lead time is 3 weeks.**

Please Specify the following:

- Screw Plug NPT Size
- Screw Plug material (Brass or SS)
- Sheath material (Incoloy®, 321 SS)
- Element Watt Density
- Immersion Length
- Heated Length
- Wattage
- Voltage
- Termination types
- Lead Length

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

(800) 323-6859 • Email: sales@tempco.com

Tempco Offers Innovative Cartridge Heater Terminations Focused on Providing Maximum Performance Under a Diverse Segment of Demanding Applications

Cartridge Heater Terminations Can be Elusive to Define and Are Often Overlooked

To ensure maximum efficiency and reliable cartridge heater service, evaluate your existing operating conditions and proceed to select the best suited termination(s) for your application.

Failure to evaluate the operating conditions and the environment of a cartridge heater application and/or improper termination selection will compromise the operating reliability and functional life of the cartridge heater, resulting in costly machine downtime and loss of revenue due to lack of productivity.

The synergy between the cartridge heater termination and the application will result in reduced operating cost, increased productivity, optimized performance and improved customer satisfaction.

Take Advantage of Tempco's Innovative Cartridge Heater Terminations.

We offer a selection of over 40 standard terminations specifically designed to address the operating requirements of a multitude of diverse applications requiring protection against the following conditions:

- **Abrasion**
- **Moisture Resistance**
- **Contamination**
- **High Temperatures**
- **Flexing**

In addition, there are many cartridge heater adaptations to facilitate their use:

- **Double-End Powerleads**
- **Locating Ring or Bushings**
- **Built-In Thermocouples & Thermostats**
- **Electrical Boxes**
- **Mounting Flanges**
- **Pull Straps**

Refer to pages 2-39 through 2-60 for complete specifications and details on all available terminations and options.

A Wise Man Once Said . . .

“A Cartridge Heater is Only As Good as the Termination that Powers It.”

Standard Termination — HDC and HDM Hi-Density Cartridge Heaters



Available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping


Type N External Pins with Leads

Available on HDC and HDM cartridge heaters

Flexible stranded lead wires have fiberglass insulation and are connected to 1-1/4" (32 mm) long solid conductors. Silicone rubber coated fiberglass sleeving insulates the pin/lead wire connection.

- Nominal 3/8" unheated section at the lead end is required.
- Standard lead wire temperature rating: 482°F (250°C)
- Silicone rubber coated fiberglass sleeving temperature rating: 392°F (200°C)
- **Standard 10" (254 mm) leads. Specify longer leads.**

Standard Termination — LDC Low-Density Cartridge Heaters

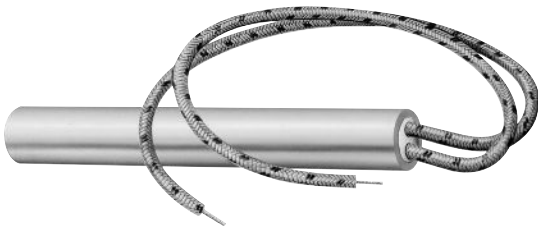

Type F Internally Connected Flexible Leads

Available on HDC, HDM and LDC Cartridge Heaters

The fiberglass lead wires are internally connected to the terminal pins. This lead termination provides flexibility, permitting the lead wires to be sharply bent as they exit the heater.


- Minimum 3/8" up to 1" unheated section at the lead end is required.
- Standard lead wire temperature rating for HDC and HDM cartridge heaters is 842°F (450°C)
- Standard lead wire temperature rating for LDC cartridge heaters is 482°F (250°C)
- **Standard 10" (254 mm) leads. Specify longer leads. For HDC & HDM heaters, leads longer than 60" require a splice.**



Note: The standard termination for Tempco's line of Miniature Hi-Density Cartridge Heaters is Type M3 - Teflon® End Plug Seal. See pages 2-10 and 2-11 for complete Miniature Cartridge heater details.

Terminations

Cartridge Heater — Moisture Resistant Terminations

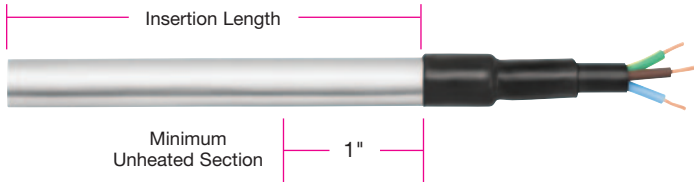

Type M1 Polyolefin Liquid Barrier

Available on HDC, HDM, and LDC cartridge heaters

A liquid barrier used for low temperature applications primarily in refrigeration or food service applications. The seal bonds to both the heater and the leads.

- Minimum 1" unheated section at the lead end is required.
- Three conductor SJO type cord.
- Available only in certain diameters. Heaters smaller than 1/2" diameter require an adapter.
- **Standard 10" (254 mm) leads. Specify longer leads.**

Type M2 Potted End Seal

Available on HDC, HDM and LDC cartridge heaters

Potted end seals help to protect the heater from moisture or contamination from plastic material, cleaning solvents, or oils. The bottom end disc seal is welded in.

M2A Cement potting with silicone varnish. Fiberglass lead wires externally connected.

- Cement potting temperature rating: 1000°F (538°C)
- Standard lead wire temperature rating: 482°F (250°C)

M2B Silicone rubber potting. Silicone rubber lead wires internally connected.

- Silicone rubber potting temperature rating: 392°F (200°C)
- Standard lead wire temperature rating: 392°F (200°C)

M2C High temperature epoxy potting. Teflon® lead wires internally connected.

- High temp. epoxy potting temp. rating: 450°F (232°C)
- Standard lead wire temperature rating: 392°F (200°C)

M2D Low temperature epoxy potting. Teflon® lead wires internally connected.

- Low temp. epoxy potting temp. rating: 266°F (130°C), UL rated to 194°F (90°C)
- Standard lead wire temperature rating: 392°F (200°C)

M2E Cement potting with silicone varnish. Fiberglass lead wires internally connected.

- Cement potting temperature rating: 1000°F (538°C)
- Standard lead wire temperature rating: 482°F (250°C)
- Minimum of 3/8" up to 1" unheated section at the lead end is required.
- **Standard 10" (254 mm) leads. Specify longer leads.**

Type M3 Teflon® End Plug Seal

Available on HDC and HDM cartridge heaters

A moisture resistant Teflon® seal that is swaged in during the manufacturing process with Teflon® insulated lead wire.

- Minimum 3/8" up to 1" unheated section at the lead end is required.
- Teflon® seal temperature rating: 392°F (200°C)
- Standard lead wire temperature rating: 392°F (200°C)
- **Standard 10" (254 mm) leads. Specify longer leads. Leads longer than 60" require a splice.**

TYPE M2A



 M2A and M2E are available through the Hi-Density Cartridge Heater Terminator Program for 2nd or 3rd Day Shipping

TYPE M2B, M2C, M2D and M2E



Note: Type M3 is the Standard Termination for Tempco's Miniature Hi-Density Cartridge Heaters. See pages 2-10 and 2-11 for complete details.

Cartridge Heater — Moisture Resistant Terminations

Type SA Sealed Corrugated Armor Cable

Available on 1/2" Diameter and Larger HDC, HDM and LDC cartridge heaters

A liquid-proof stainless steel corrugated metal hose is silver brazed to the end of the cartridge heater. The end disc of the heater is also welded or brazed. This termination provides a positive seal against moisture and contamination entering the heater.

- ▶ Minimum 3/8" up to 1" unheated section at the lead end is required.
- ▶ Standard fiberglass lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)
- ▶ **Standard 10" (254 mm) cable over 12" (305 mm) leads.**
Specify longer leads or cable.



Cartridge Heater — Flexible Spring Abrasion Resistant Terminations

Type S1 Flexible Spring

Available on HDC, HDM, and LDC cartridge heaters.

The leads are reinforced with a steel spring for applications with extreme flexing. The spring is mechanically fastened or silver brazed.

S1A Mechanically fastened spring.


S1B Silver brazed spring.

- ▶ Minimum 3/8" up to 1" unheated section at the lead end is required.
- ▶ Standard fiberglass lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)
- ▶ **Standard 10" (254 mm) leads.** Specify longer leads.


Dimensions for Type S1

| | Diameter | | Fig. | "A" Dim. | | "B" Dim. | |
|-------------------------------|----------|-------|------|----------|-------|----------|-------|
| | in | mm | | in | mm | in | mm |
| Hi-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 11/16 | 17.46 | 5/16 | 7.94 |
| | 5/16 | 7.94 | 1 | 11/16 | 17.46 | 7/16 | 11.11 |
| | 3/8 | 9.53 | 1 | 11/16 | 17.46 | 7/16 | 11.11 |
| | 1/2 | 12.70 | 1 | 13/16 | 20.64 | 9/16 | 14.29 |
| | 5/8 | 15.88 | 1 | 1 | 25.40 | 3/4 | 19.05 |
| | 3/4 | 19.05 | 1 | 1-1/4 | 31.75 | 7/8 | 22.23 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 | 5/8 | 15.88 |
| Low-Density Cartridge Heaters | 3/16 | 4.76 | — | — | — | — | — |
| | 1/4 | 6.35 | 1 | 11/16 | 17.46 | 5/16 | 7.94 |
| | 3/8 | 9.53 | 1 | 11/16 | 17.46 | 7/16 | 11.11 |
| | 1/2 | 12.70 | 1 | 13/16 | 20.64 | 9/16 | 14.29 |
| | 5/8 | 15.88 | 2 | 7/16 | 11.11 | 9/16 | 14.29 |
| | 3/4 | 19.05 | 2 | 1/2 | 12.70 | 9/16 | 14.29 |
| | 7/8 | 22.23 | 2 | 5/8 | 15.88 | 9/16 | 14.29 |
| | 15/16 | 22.81 | 2 | 5/8 | 15.88 | 5/8 | 15.88 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 | 5/8 | 15.88 |
| | 1-1/4 | 31.75 | 2 | 5/8 | 15.88 | 5/8 | 15.88 |

TYPE S1 Fig. 1

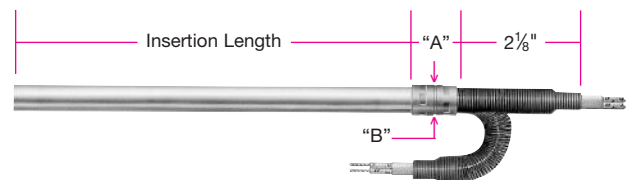


TYPE S1 Fig. 2

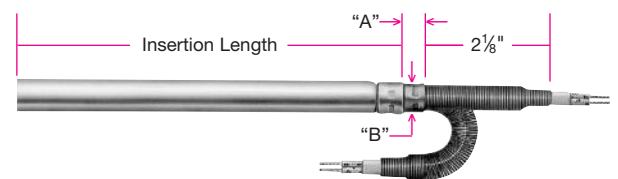

Cartridge Heater — Flexible Braid Abrasion Resistant Terminations

TYPE W Fig. 1

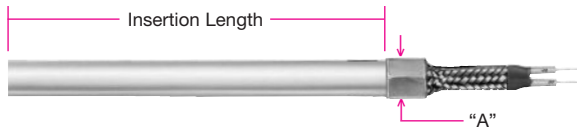

TYPE W Fig. 2



Available through the Hi-Density Cartridge Heater Terminator Program for 2nd or 3rd Day Shipping

Type W Wire Braided Leads

Available on HDC, HDM, and LDC cartridge heaters

Stainless steel braid over fiberglass leads offers sharp bending not possible with armor cable, as well as abrasion protection.

- ▶ Minimum 3/8" up to 1" unheated section at the lead end is required.
- ▶ Standard lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)
- ▶ **Standard 10" (254 mm) braid over 12" (305 mm) leads.**
Specify longer braid/leads.

| Diameter | | Fig. | "A" Dim./HD | | "A" Dim./LD | |
|----------|-------|------|-------------|-------|-------------|-------|
| in | mm | | in | mm | in | mm |
| 3/16 | 4.76 | 1 | — | — | 1/4 | 6.35 |
| 1/4 | 6.35 | 1 | 5/16 | 7.94 | 5/16 | 7.94 |
| 5/16 | 7.94 | 1 | 3/8 | 9.53 | — | — |
| 3/8 | 9.53 | 2 | 3/8 | 9.53 | 3/8 | 9.53 |
| 1/2 | 12.70 | 2 | 7/16 | 11.11 | 7/16 | 11.11 |
| 5/8 | 15.88 | 2 | 9/16 | 14.29 | 9/16 | 14.29 |

| Diameter | | Fig. | "A" Dim./HD | | "A" Dim./LD | |
|----------|-------|------|-------------|-------|-------------|-------|
| in | mm | | in | mm | in | mm |
| 3/4 | 19.05 | 2 | 9/16 | 14.29 | 9/16 | 14.29 |
| 7/8 | 22.23 | 2 | — | — | 9/16 | 14.29 |
| 15/16 | 23.81 | 2 | — | — | 9/16 | 14.29 |
| 1 | 25.40 | 2 | 9/16 | 14.29 | 9/16 | 14.29 |
| 1-1/4 | 31.75 | 2 | — | — | 9/16 | 14.29 |



Type W3 Swaged-In Wire Braided Leads

Available on HDC and HDM cartridge heaters

Stainless steel braid over fiberglass leads offers sharp bending not possible with armor cable, as well as abrasion protection. In addition, Type W3 offers contamination resistance due to the Teflon® seal required for holding the wire braid.

- ▶ Minimum 3/8" up to 1" unheated section at the lead end is required.
- ▶ Teflon® Seal temperature rating: 392°F (200°C)
- ▶ Standard lead wire temperature rating: 842°F (450°C)
- ▶ **Standard 10" (254 mm) braid over 12" (305 mm) leads.**
Specify longer braid/leads.

Cartridge Heater — Armor Cable Abrasion Resistant Terminations

Type CS Straight Armor Cable Directly Attached to Sheath

Available on HDC, HDM, and LDC cartridge heaters

The armor cable is directly attached to the cartridge heater, eliminating the coupling, to maintain an overall diameter equal to or smaller than the cartridge diameter.

CSA Galvanized armor cable – minimum diameter: 5/16"

CSB Stainless steel armor cable – minimum diameter: 5/16"

- Minimum 3/8" up to 1" unheated section at the lead end is required.
- Heaters with an OD of 3/4" or larger require reducing diameter washer
- Standard fiberglass lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)
- **Standard 10" (254 mm) cable over 12" (305 mm) leads.**
Specify longer leads or cable.



Type C1 Straight Armor Cable with Coupling

Available on HDC, HDM, or LDC cartridge heaters

Armor cable provides the maximum in protection for abrasive, jagged environments. The coupling between the cartridge and the armor cable is mechanically fastened or silver brazed.

C1A Galvanized armor cable, mechanically fastened

C1B Stainless steel armor cable, mechanically fastened

- Standard fiberglass lead wire temperature rating 482°F (250°C)


C1C Galvanized armor cable, silver brazed

C1D Stainless steel armor cable, silver brazed

- Standard fiberglass lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)

- Minimum 3/8" up to 1" unheated section at the lead end is required.
- **Standard 10" (254 mm) cable over 12" (305 mm) leads.** Specify longer leads or cable.

TYPE C1 Fig. 1

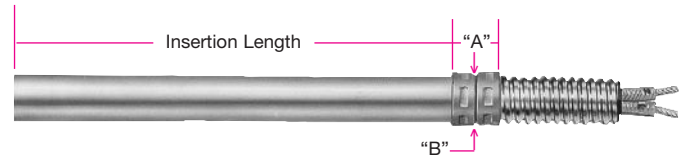


C1A and C1B are available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping

Dimensions for Type C1

| | Diameter | | Fig. | "A" Dim. | | "B" Dim. | | Cable Dia. |
|-------------------------------|----------|-------|------|----------|-------|----------|-------|------------|
| | in | mm | | in | mm | in | mm | |
| Hi-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 11/16 | 17.46 | 5/16 | 7.94 | 1/4 |
| | 5/16 | 7.94 | 1 | 11/16 | 17.46 | 7/16 | 11.11 | 1/4 |
| | 3/8 | 9.53 | 1 | 11/16 | 17.46 | 7/16 | 11.11 | 3/8 |
| | 1/2 | 12.70 | 1 | 13/16 | 20.64 | 9/16 | 14.29 | 1/2 |
| | 5/8 | 15.88 | 1 | 1 | 25.40 | 3/4 | 19.05 | 1/2 |
| | 3/4 | 19.05 | 1 | 1-1/4 | 31.75 | 7/8 | 22.23 | 1/2 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 | 5/8 | 15.88 | 1/2 |
| Low-Density Cartridge Heaters | 3/16 | 4.76 | — | — | — | — | — | — |
| | 1/4 | 6.35 | 1 | 11/16 | 17.46 | 5/16 | 7.94 | 1/4 |
| | 3/8 | 9.53 | 1 | 11/16 | 17.46 | 7/16 | 11.11 | 3/8 |
| | 1/2 | 12.70 | 1 | 13/16 | 20.64 | 9/16 | 14.29 | 1/2 |
| | 5/8 | 15.88 | 2 | 7/16 | 11.11 | 9/16 | 14.29 | 1/2 |
| | 3/4 | 19.05 | 2 | 1/2 | 12.70 | 9/16 | 14.29 | 1/2 |
| | 7/8 | 22.23 | 2 | 5/8 | 15.88 | 9/16 | 14.29 | 1/2 |
| | 15/16 | 23.81 | 2 | 5/8 | 15.88 | 5/8 | 15.88 | 1/2 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 | 5/8 | 15.88 | 1/2 |


TYPE C1 Fig. 2

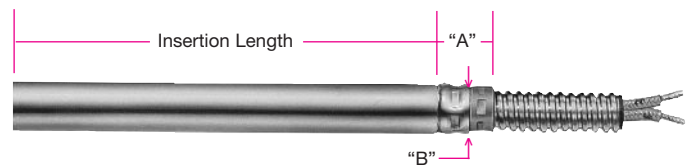


Right-Angle Terminations

Cartridge Heater — Plain Leads Right-Angle Terminations

TYPE R1 Fig. 1

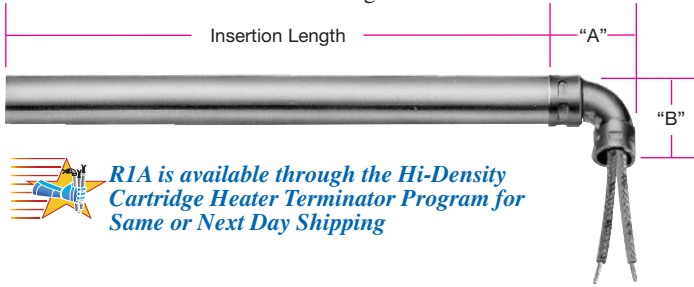

TYPE R1 Fig. 2

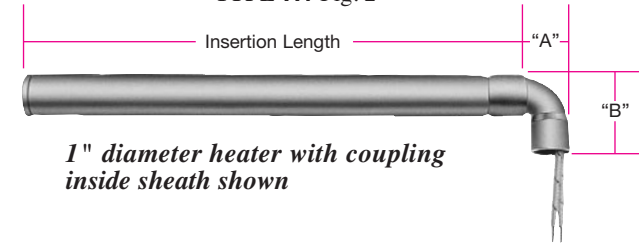

Dimensions for Type R1

| | Diameter | | Fig. | "A" Dim. | | "B" Dim. | |
|-----------------------------|----------|-------|------|----------|-------|----------|-------|
| | in | mm | | in | mm | in | mm |
| Hi-Density Cartridge Heater | 1/4 | 6.35 | 1 | 3/4 | 19.05 | 3/4 | 19.05 |
| | 5/16 | 7.94 | 1 | 15/16 | 23.81 | 15/16 | 23.81 |
| | 3/8 | 9.53 | 1 | 15/16 | 23.81 | 15/16 | 23.81 |
| | 1/2 | 12.70 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 |
| | 5/8 | 15.88 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 |
| | 3/4 | 19.05 | 1 | 1-3/4 | 44.45 | 1-1/4 | 31.75 |
| | 1 | 25.40 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 |

Type R1 □ Right-Angle Leads with Copper Elbow

Available on HDC, HDM, and LDC cartridge heaters

This termination is used when space is limited. The copper elbow is mechanically fastened or silver brazed.

R1A Mechanically fastened

R1B Silver brazed

- Minimum 3/8" up to 1" unheated section at the lead end is required.
- Standard fiberglass lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)
- **Standard 10" (254 mm) leads. Specify longer leads.**

Dimensions for Type R1

| | Diameter | | Fig. | "A" Dim. | | "B" Dim. | |
|------------------------------|----------|-------|------|----------|-------|----------|-------|
| | in | mm | | in | mm | in | mm |
| Low Density Cartridge Heater | 3/16 | 4.76 | — | — | — | — | — |
| | 1/4 | 6.35 | 1 | 3/4 | 19.05 | 3/4 | 19.05 |
| | 3/8 | 9.53 | 1 | 15/16 | 23.81 | 15/16 | 23.81 |
| | 1/2 | 12.70 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 |
| | 5/8 | 15.88 | 2 | 11/16 | 17.46 | 1-1/4 | 31.75 |
| | 3/4 | 19.05 | 2 | 3/4 | 19.05 | 1-1/4 | 31.75 |
| | 7/8 | 22.23 | 2 | 3/4 | 19.05 | 1-3/8 | 34.93 |
| | 15/16 | 23.81 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 |
| | 1 | 25.40 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 |
| | 1-1/4 | 31.75 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 |

Type R2 □ Right-Angle Leads

Available on HDC, HDM, and LDC cartridge heaters

This termination is used when space is limited. Not suitable for abrasive environments. The plain leads are internally connected and offer flexibility. Various lead end finishes are available as listed below:

R2A Cement potting, no lead end disc

- Cement potting temperature rating: 1000°F (538°C)
- Standard fiberglass lead wire temperature rating: 482°F (250°C)

R2B Cement potting, welded lead end disc

- Cement potting temperature rating: 1000°F (538°C)
- Standard fiberglass lead wire temperature rating: 482°F (250°C)

R2C Silicone rubber potting, welded lead end disc

- Silicone Rubber potting temperature rating: 392°F (200°C)
- Standard silicone rubber lead wire temperature rating: 392°F (200°C)

R2D High temperature epoxy potting, welded lead end disc


- High Temperature epoxy potting temperature rating: 450°F (232°C)
- Standard Teflon® lead wire temperature rating: 392°F (200°C)

R2E Low temperature epoxy potting, welded lead end disc

- Low Temperature epoxy potting temperature rating: 266°F (130°C)
- Standard Teflon® lead wire temperature rating: 392°F (200°C)

➤ Minimum 3/8" up to 1" unheated section at the lead end is required.

➤ **Standard 10" (254 mm) leads. Specify other lead lengths.**

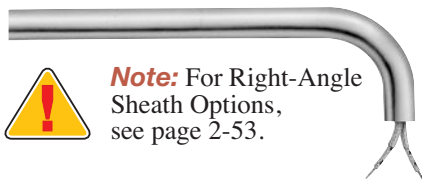

Note: For Right-Angle Sheath Options, see page 2-53.

CONTINUED

Cartridge Heater — Plain Leads Right-Angle Terminations


Continued from previous page...

Type R2 Right-Angle Leads


Dimensions for Type R2

| | Diameter | | Fig. | "A" Dim. | |
|-------------------------------|----------|-------|------|----------|-------|
| | in | mm | | in | mm |
| Hi-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 7/16 | 11.11 |
| | 5/16 | 7.94 | 1 | 7/16 | 11.11 |
| | 3/8 | 9.53 | 2 | 7/16 | 11.11 |
| | 1/2 | 12.70 | 2 | 9/16 | 14.29 |
| | 5/8 | 15.88 | 2 | 9/16 | 14.29 |
| | 3/4 | 19.05 | 2 | 9/16 | 14.29 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 |
| Low-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 7/16 | 11.11 |
| | 3/8 | 9.53 | 2 | 7/16 | 11.11 |
| | 1/2 | 12.70 | 2 | 9/16 | 14.29 |
| | 5/8 | 15.88 | 2 | 9/16 | 14.29 |
| | 3/4 | 19.05 | 2 | 9/16 | 14.29 |
| | 7/8 | 22.23 | 2 | 5/8 | 15.88 |
| | 15/16 | 23.81 | 2 | 5/8 | 15.88 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 |
| | 1-1/4 | 31.75 | 2 | 5/8 | 15.88 |

TYPE R2 Fig. 1

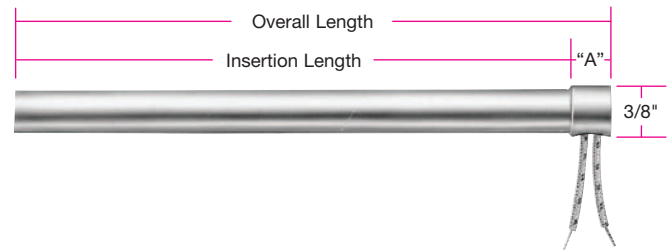

TYPE R2 Fig. 2

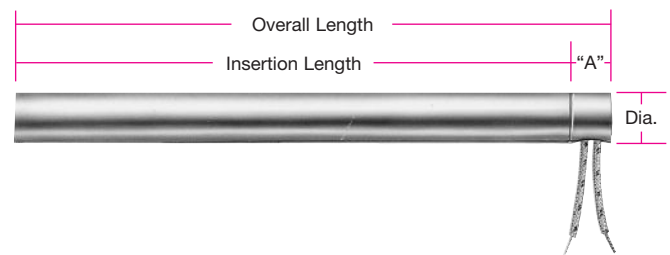

Cartridge Heater — Flexible Spring Abrasion Resistant Right-Angle Terminations

Type S2 Right-Angle Spring

Available on HDC, HDM, and LDC cartridge heaters

The leads are reinforced with a steel spring for applications with extreme flexing. The spring is mechanically fastened or silver brazed.

S2A Mechanically fastened spring


S2B Silver brazed spring

- Minimum 3/8" up to 1" unheated section at the lead end is required.
- Standard fiberglass lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)
- **Standard 10" (254 mm) leads.** Specify longer leads.


Dimensions for Type S2

| | Diameter | | Fig. | "A" Dim. | | "B" Dim. | |
|-------------------------------|----------|-------|-------|----------|-------|----------|-------|
| | in | mm | | in | mm | in | mm |
| Hi-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 3/4 | 19.05 | 3/4 | 19.05 |
| | 5/16 | 7.94 | 1 | 15/16 | 23.81 | 15/16 | 23.81 |
| | 3/8 | 9.53 | 1 | 15/16 | 23.81 | 15/16 | 23.81 |
| | 1/2 | 12.70 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 |
| | 5/8 | 15.88 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 |
| | 3/4 | 19.05 | 1 | 1-3/4 | 44.45 | 1-1/4 | 31.75 |
| | 1 | 25.40 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 |
| Low-Density Cartridge Heaters | 3/16 | 4.76 | — | — | — | — | — |
| | 1/4 | 6.35 | 1 | 3/4 | 19.05 | 3/4 | 19.05 |
| | 3/8 | 9.53 | 1 | 15/16 | 23.81 | 15/16 | 23.81 |
| | 1/2 | 12.70 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 |
| | 5/8 | 15.88 | 2 | 11/16 | 17.46 | 1-1/4 | 31.75 |
| | 3/4 | 19.05 | 2 | 3/4 | 19.05 | 1-1/4 | 31.75 |
| | 7/8 | 22.23 | 2 | 3/4 | 19.05 | 1-3/8 | 34.93 |
| | 15/16 | 23.81 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 |
| | 1 | 25.40 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 |
| 1-1/4 | 31.75 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 | |

TYPE S2 Fig. 1

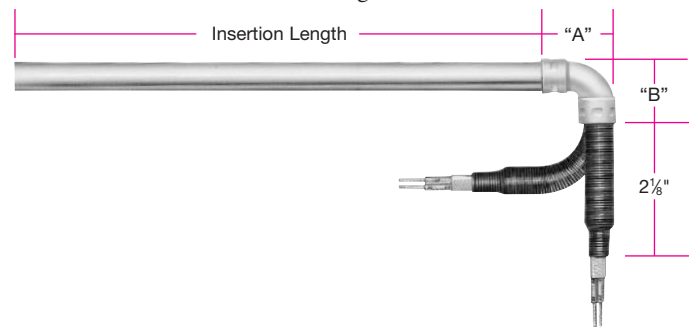


TYPE S2 Fig. 2

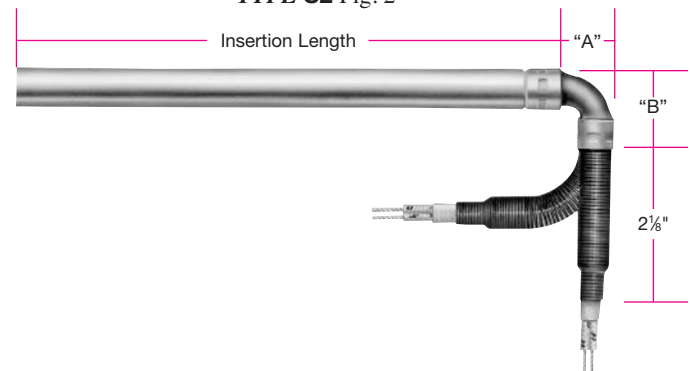


Right-Angle Terminations


Cartridge Heater — Flexible Braid Abrasion Resistant Right-Angle Terminations

TYPE W1 Fig. 1

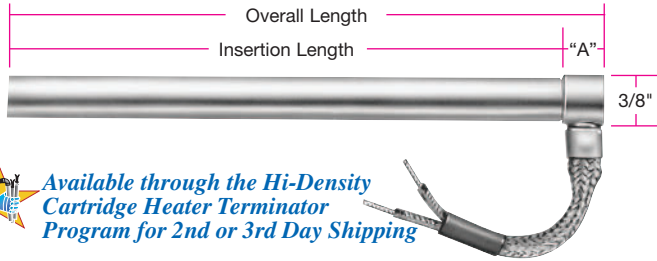

TYPE W1 Fig. 2

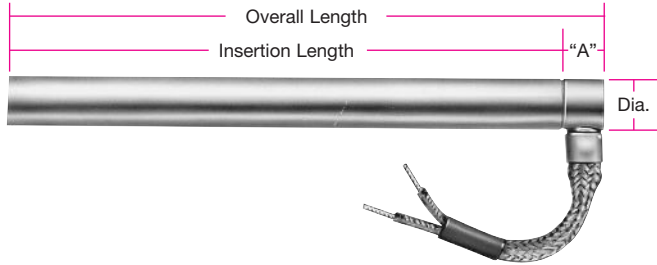

 Available through the Hi-Density Cartridge Heater Terminator Program for 2nd or 3rd Day Shipping

Type W1 Right-Angle Wire Braided Leads

Available on HDC, HDM, and LDC cartridge heaters

Stainless steel braid over fiberglass leads for abrasion protection, mechanically crimped to the cartridge sheath at 90°. Wire braid offers extreme flexibility not possible with armor cable. Various lead end finishes are available as listed below.

W1A Cement potting and silicone varnish, no lead end disc.

- Cement potting temperature rating: 1000°F (538°C)
- Standard lead wire temperature rating: 482°F (250°C)

W1B Welded lead end disc.

- Cement potting temperature rating: 1000°F (538°C)
- Standard lead wire temperature rating: 482°F (250°C)
- Minimum 3/8" up to 1" unheated section at the lead end is required.
- **Standard 10" (254 mm) braid over 12" (305 mm) leads.** Specify longer braid or leads.

Dimensions for Type W1

| | Diameter | | Fig. | "A" Dim. | |
|------------------------------|----------|-------|------|----------|-------|
| | in | mm | | in | mm |
| Hi-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 7/16 | 11.11 |
| | 5/16 | 7.94 | 1 | 7/16 | 11.11 |
| | 3/8 | 9.53 | 2 | 7/16 | 11.11 |
| | 1/2 | 12.70 | 2 | 9/16 | 14.29 |
| | 5/8 | 15.88 | 2 | 9/16 | 14.29 |
| | 3/4 | 19.05 | 2 | 9/16 | 14.29 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 |

Dimensions for Type W1

| | Diameter | | Fig. | "A" Dim. | |
|-------------------------------|----------|-------|------|----------|-------|
| | in | mm | | in | mm |
| Low-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 7/16 | 11.11 |
| | 3/8 | 9.53 | 2 | 7/16 | 11.11 |
| | 1/2 | 12.70 | 2 | 9/16 | 14.29 |
| | 5/8 | 15.88 | 2 | 9/16 | 14.29 |
| | 3/4 | 19.05 | 2 | 9/16 | 14.29 |
| | 7/8 | 22.23 | 2 | 5/8 | 15.88 |
| | 15/16 | 23.81 | 2 | 5/8 | 15.88 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 |
| | 1-1/4 | 31.75 | 2 | 5/8 | 15.88 |

Cartridge Heater — Armor Cable Abrasion Resistant Right-Angle Terminations



Type C2 Right-Angle Armor Cable with Copper Elbow

Available on HDC, HDM, and LDC cartridge heaters

Armor cable provides the maximum in protection for abrasive, jagged environments. The copper elbow between the cartridge and the armor cable is mechanically fastened or silver brazed.


C2A Galvanized armor cable, mechanically fastened

C2B Stainless steel armor cable, mechanically fastened

C2C Galvanized armor cable, silver brazed

C2D Stainless steel armor cable, silver brazed

- Minimum 3/8" up to 1" unheated section at the lead end is required.
- Standard fiberglass lead wire temperature rating
HDC and HDM: 842°F (450°C), LDC: 482°F (250°C)
- **Standard 10" (254 mm) cable over 12" (305 mm) leads.** Specify longer cable or leads.

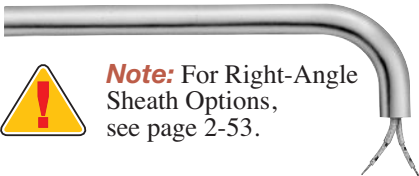

Note: For Right-Angle Sheath Options, see page 2-53.

CONTINUED 



Cartridge Heater — Armor Cable Abrasion Resistant Right-Angle Terminations

Continued from previous page...

Type C2 Right-Angle Armor Cable with Copper Elbow

Dimensions for Type C2

| | Diameter | | Fig. | "A" Dim. | | "B" Dim. | | Cable Dia. |
|-------------------------------|----------|-------|-------|----------|-------|----------|-------|------------|
| | in | mm | | in | mm | in | mm | |
| Hi-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 3/4 | 19.05 | 3/4 | 19.05 | 1/4 |
| | 5/16 | 7.94 | 1 | 15/16 | 23.81 | 15/16 | 23.81 | 1/4 |
| | 3/8 | 9.53 | 1 | 15/16 | 23.81 | 15/16 | 23.81 | 3/8 |
| | 1/2 | 12.70 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 | 1/2 |
| | 5/8 | 15.88 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 | 1/2 |
| | 3/4 | 19.05 | 1 | 1-3/4 | 44.45 | 1-1/4 | 31.75 | 1/2 |
| Low-Density Cartridge Heaters | 1 | 25.40 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 | 1/2 |
| | 1/4 | 6.35 | 1 | 3/4 | 19.05 | 3/4 | 19.05 | 1/4 |
| | 3/8 | 9.53 | 1 | 15/16 | 23.81 | 15/16 | 23.81 | 3/8 |
| | 1/2 | 12.70 | 1 | 1-1/4 | 31.75 | 1-1/4 | 31.75 | 1/2 |
| | 5/8 | 15.88 | 2 | 11/16 | 17.46 | 1-1/4 | 31.75 | 1/2 |
| | 3/4 | 19.05 | 2 | 3/4 | 19.05 | 1-1/4 | 31.75 | 1/2 |
| | 7/8 | 22.23 | 2 | 3/4 | 19.05 | 1-3/8 | 34.93 | 1/2 |
| | 15/16 | 23.81 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 | 1/2 |
| 1 | 25.40 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 | 1/2 | |
| 1-1/4 | 31.75 | 2 | 1-1/8 | 28.58 | 1-3/8 | 34.93 | 1/2 | |

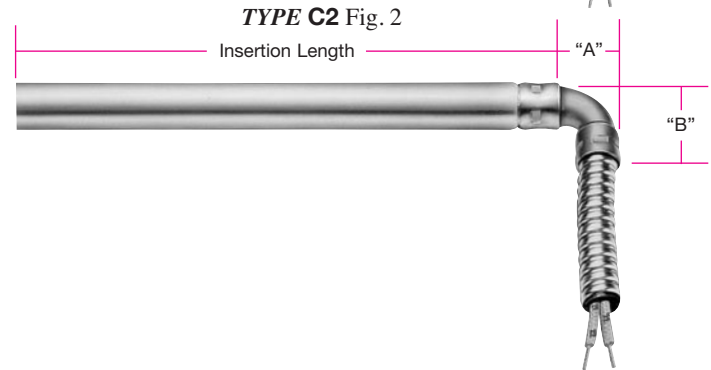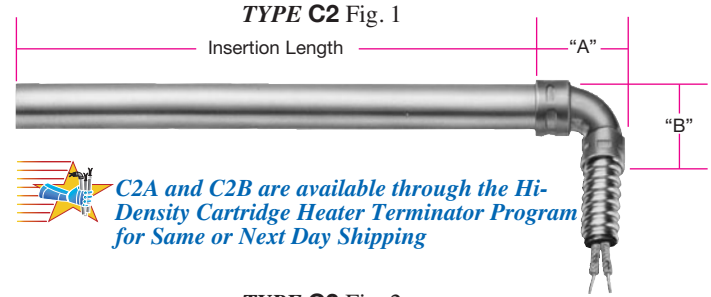



C2A and C2B are available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping

Type C3 Right-Angle Armor Cable

Available on HDC, HDM, and LDC cartridge heaters

Use this termination when space is limited and maximum protection is required. The armor cable is tack welded or silver brazed to the cartridge sheath at 90°. The sheath extension is potted with cement. Various lead end finishes are available as listed below.

- C3A** Cement potting and silicone varnish with no lead end disc, galvanized cable
- C3B** Cement potting and silicone varnish with no lead end disc, stainless steel cable
- C3C** Welded lead end disc, with galvanized cable
- C3D** Welded lead end disc, with stainless steel cable
- Minimum 3/8" up to 1" unheated section at the lead end is required.
- Cement potting temperature rating: 1000°F (538°C)
Standard fiberglass lead wire temperature rating: 482°F (250°C)
- **Standard** 10" (254 mm) armor cable over 12" (305 mm) leads. Specify longer cable or leads.

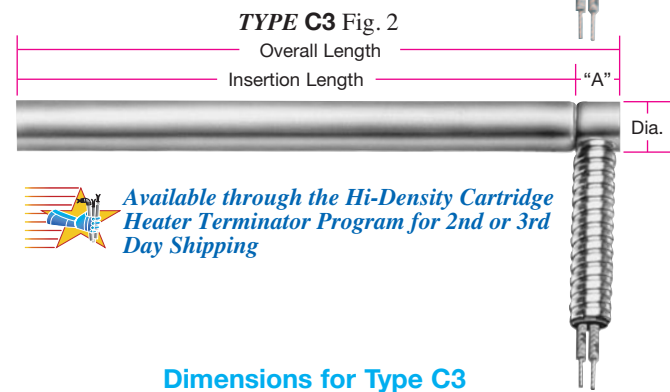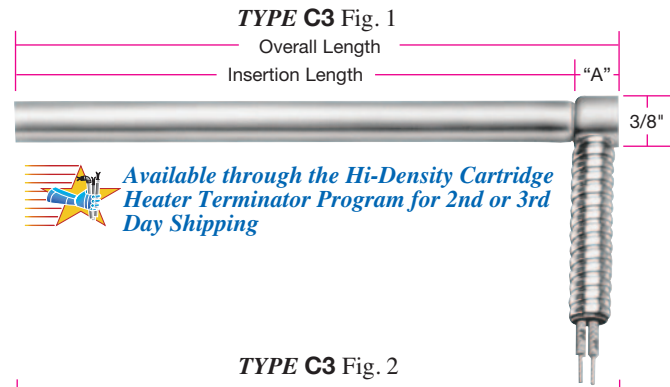

Available through the Hi-Density Cartridge Heater Terminator Program for 2nd or 3rd Day Shipping

Available through the Hi-Density Cartridge Heater Terminator Program for 2nd or 3rd Day Shipping

Dimensions for Type C3

| | Diameter | | Fig. | "A" Dim. | | Armor Cable | |
|------------------------------|----------|-------|------|----------|-------|-------------|-------|
| | in | mm | | in | mm | in | mm |
| Hi-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 7/16 | 11.11 | 1/4 | 6.35 |
| | 5/16 | 7.94 | 1 | 7/16 | 11.11 | 1/4 | 6.35 |
| | 3/8 | 9.53 | 2 | 7/16 | 11.11 | 3/8 | 9.53 |
| | 1/2 | 12.70 | 2 | 9/16 | 14.29 | 3/8 | 9.53 |
| | 5/8 | 15.88 | 2 | 9/16 | 14.29 | 1/2 | 12.70 |
| | 3/4 | 19.05 | 2 | 9/16 | 14.29 | 1/2 | 12.70 |
| 1 | 25.40 | 2 | 5/8 | 15.88 | 1/2 | 12.70 | |

Dimensions for Type C3

| | Diameter | | Fig. | "A" Dim. | | Armor Cable | |
|-------------------------------|----------|-------|------|----------|-------|-------------|-------|
| | in | mm | | in | mm | in | mm |
| Low-Density Cartridge Heaters | 1/4 | 6.35 | 1 | 7/16 | 11.11 | 1/4 | 6.35 |
| | 3/8 | 9.53 | 2 | 7/16 | 11.11 | 3/8 | 9.53 |
| | 1/2 | 12.70 | 2 | 9/16 | 14.29 | 3/8 | 9.53 |
| | 5/8 | 15.88 | 2 | 9/16 | 14.29 | 1/2 | 12.70 |
| | 3/4 | 19.05 | 2 | 9/16 | 14.29 | 1/2 | 12.70 |
| | 7/8 | 22.23 | 2 | 5/8 | 15.88 | 1/2 | 12.70 |
| | 1 | 25.40 | 2 | 5/8 | 15.88 | 1/2 | 12.70 |
| | 1-1/4 | 31.75 | 2 | 5/8 | 15.88 | 1/2 | 12.70 |

Cartridge Heater — Screw Terminations

Type T1 Screw Terminals

Available on LDC type cartridge heaters only

For use with leads, crimp terminals, or bus bars. Includes washers and nuts.

- Minimum 1/2" unheated section at the lead end is required.
- Diameters available: 3/4", 7/8", 15/16", 1", and 1-1/4".
- **Standard:** screw #6-32 x 3/4" long



| Diameter | in | 3/4 | 7/8 | 15/16 | 1 | 1-1/4 | |
|---------------|----|-----|-------|-------|-------|-------|-------|
| | mm | | 19.05 | 22.23 | 23.81 | 25.40 | 31.75 |
| "A" Dimension | in | | 3/8 | 7/16 | 7/16 | 1/2 | 1/2 |
| | mm | | 9.53 | 11.11 | 11.11 | 12.70 | 12.70 |

Type T2 Screw Terminals

Available on HDC and HDM type cartridge heaters only

For use with leads, crimp terminals, or bus bars. Includes washers and nuts.

- Minimum 1/2" unheated section at the lead end is required.
- Diameters available: HD — 5/8", 3/4", 1"
HDM — 16 mm and 20 mm
- **Standard:** screw #8-32



Cartridge Heater — High Temperature Termination

Type B Heat Resistant Ceramic Bead Insulation

Available on HDC, HDM, and LDC cartridge heaters.

The ultimate in high temperature lead protection. Allows for the attachment of flexible leads to the heater away from the high heat area. Used when the ambient temperature exceeds 842°F (450°C).

- **Standard** 10" (254 mm) solid nickel pins insulated with ball and socket construction type ceramic beads



 Available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping

Type BL Heat Resistant Ceramic Bead Insulation with Leads

Available on HDC, HDM, and LDC cartridge heaters.

High temperature flexible leads are connected away from the high heat area.

- **Standard** 6" (254 mm) solid nickel pins insulated with ball and socket construction type ceramic beads and 10" (254 mm) fiberglass leads rated at 842°F (450°C). Specify longer leads.



 Available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping

Cartridge Heater — Double End Terminations

Type T4 □ Double End Terminal Pin

Available on HDC, HDM, and LDC cartridge heaters

For those applications in which wiring from both ends is an advantage. Various seals are available:

- T4A** Cement potting seal with silicone varnish
 - Cement potting temperature rating: 1000°F (538°C)
- T4B** High temp. moisture resistant epoxy seal
 - High temp. epoxy temp. rating: 450°F (232°C)
- T4C** Low temp. moisture resistant epoxy seal
 - Low temp. epoxy temp. rating: 266°F (130°C)
- Minimum 1" unheated section at each end is required.
- **Standard** terminal pin length is 2".



Type F1 □ Double End Flexible Leads

Available on HDC, HDM, and LDC cartridge heaters

For applications in which it is an advantage to wire from both ends. The leads are internally connected and can be bent sharply as they exit the potted ends. Various seals are available:

- F1A** Fiberglass leads with cement potting seal and silicone varnish
 - Cement potting temperature rating: 1000°F (532°C)
 - Standard lead wire temperature rating: 482°F (250°C)
- F1B** Teflon® leads with high temp. moisture resistant epoxy seal
 - High temp. epoxy temperature rating: 450°F (232°C)
 - Standard lead wire temperature rating: 392°F (200°C)
- F1C** Teflon® leads with low temp. moisture resistant epoxy seal
 - Low temp. epoxy temperature rating: 266°F (130°C)
 - Standard lead wire temperature rating: 392°F (200°C)
- Minimum 1" unheated section at each end is required.
- **Standard** 10" leads. Specify longer leads.
Leads longer than 60" require a splice.



Type T3 Double End Screw Terminals

Available on HDC, HDM, and LDC cartridge heaters from 1/2" to 1-1/4" diameter

A double ended heater with quick change wiring screw terminals. Includes zinc plated washers and nuts.

- Minimum 1/2" unheated section at each end is required.


Standard screw sizes:


- 1/2" diameter — #8-32 × 3/4" screws
- 5/8" to 1-1/4" diameter — #10-32 × 3/4" screws



Cartridge Heater Termination — Single Ended National Pipe Thread (NPT) Fitting

TYPE CM Fig. 1 – Fitting Flush with Lead End of Sheath

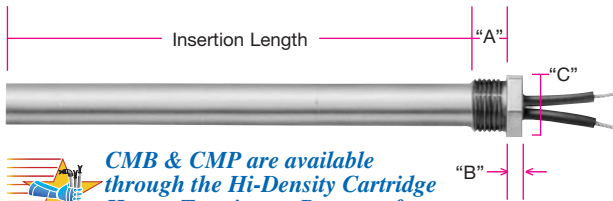

 **CMB & CMP are available through the Hi-Density Cartridge Heater Terminator Program for 2nd or 3rd Day Shipping**

NOTE: Stainless steel fittings are available through the Terminator program for heaters 1/2" diameter and larger.



Note: Fitting can be offset from end of sheath. See Figure 2, Single Threaded Mounting Options CMV and CMW below.

Standard NPT Bushing Dimensions (Fig. 1 & Fig. 2)

| Heater Diameter (in) | NPT Size | "A" | "B" | "C" |
|----------------------|--------------|-------|------|-------|
| 1/4 | 1/8-27 | 3/8 | 3/16 | 7/16 |
| 3/8 | 1/4-18 | 1/2 | 3/16 | 9/16 |
| 1/2 | 3/8-18 | 9/16 | 1/4 | 11/16 |
| 5/8 | 1/2-14 | 5/8 | 1/4 | 7/8 |
| 3/4 | 3/4-14 | 3/4 | 1/4 | 1-1/8 |
| 7/8 | 1-11 1/2 | 3/4 | 1/4 | 1-3/8 |
| 1 | 1-11 1/2 | 7/8 | 3/8 | 1-3/8 |
| 1-1/4 | 1 1/4-11 1/2 | 15/16 | 3/8 | 1-3/4 |

Type CM Single Threaded Fitting Mounting Termination Fitting Flush with Lead End of Sheath

Available on HDC, HDM, and LDC cartridge heaters

A single threaded pipe fitting is attached to the end of a cartridge heater to allow for installation into a threaded hole. Brass fittings are silver brazed and stainless steel fittings are heli-arc welded. Available with the potting seals listed in the table.

Potted end seals help to protect the heater from moisture or contamination from plastic material, cleaning solvents, or oils. The bushing cavity can be sealed with various materials such as:

CMA/CMN Low temperature epoxy potting — 266°F (130°C), UL rated to 194°F (90°C)
Teflon® leads internally connected, rated 392°F (200°C).

CMB/CMP Hi-temp cement potting with silicone varnish — 1000°F (538°C)
Fiberglass leads internally connected, rated 482°F (250°C).

CMC/CMQ Silicone rubber potting — 392°F (200°C)
Silicone rubber leads internally connected, rated 392°F (200°C).

CMD/CMR High temperature epoxy potting — 450°F (232°C)
Teflon® leads internally connected, rated 392°F (200°C).


- A minimum of 1/4" unheated section below the bushing is required.
- **Standard 10" (254 mm) leads. Specify longer leads.**

Type Codes for Single Threaded Fittings

| Potting Seal Type | Fitting Material | |
|-------------------|------------------|-----------------|
| | Brass | Stainless Steel |
| Low Temp Epoxy | CMA | CMN |
| Hi-Temp Cement | CMB | CMP |
| Silicone Rubber | CMC | CMQ |
| Hi-Temp Epoxy | CMD | CMR |

Single Ended National Pipe Thread (NPT) Fitting Option

TYPE CM Fig. 2 – Fitting Offset from Lead End of Sheath

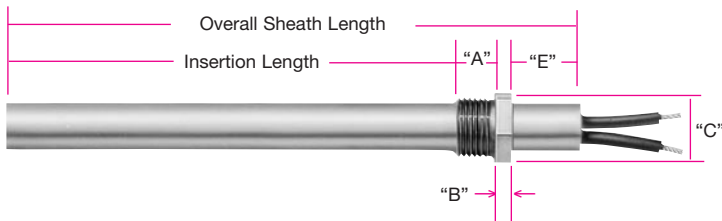

Type CM Single Threaded Fitting Mounting Option Fitting Offset from Lead End of Sheath

Available on HDC, HDM, and LDC cartridge heaters

This mounting option available with many terminations attaches a fitting offset from the lead end of the sheath. This option is useful when the lead wires need to be kept away from the heated area. Brass fittings are silver brazed and stainless steel fittings are offset heli-arc welded.

CMV Brass Fitting

CMW Stainless Steel Fitting

- Specify offset dimension "E" when ordering.
- A termination must be specified separately.

Hi-Density Cartridge Immersion Heater Specifically Designed for Heating Water & Other Liquids



See Page 2-23.

[View Product Inventory @ www.tempco.com](http://www.tempco.com)

Cartridge Heater — Double Ended National Pipe Thread (NPT)

Type CN Double Threaded Fitting Mounting Termination Fitting Flush with Lead End of Sheath

Available on HDC, HDM, and LDC cartridge heaters


A double threaded pipe fitting is attached to the end of a cartridge heater to allow for installation into a threaded hole. Brass fittings are silver brazed and stainless steel fittings are heli-arc welded.

Standard NPT Bushing Dimensions

| Heater Diameter (in) | NPT Size | "A" | "B" | "C" |
|----------------------|--------------|------|------|-------|
| 1/4 | 1/8-27 | 3/8 | 1/4 | 7/16 |
| 3/8 | 1/4-18 | 1/2 | 1/4 | 9/16 |
| 1/2 | 3/8-18 | 9/16 | 1/4 | 11/16 |
| 5/8 | 1/2-14 | 5/8 | 5/16 | 7/8 |
| 3/4 | 3/4-14 | 3/4 | 3/8 | 1-1/8 |
| 7/8 | 1-11 1/2 | 3/4 | 3/8 | 1-3/8 |
| 1 | 1-11 1/2 | 7/8 | 3/8 | 1-3/8 |
| 1-1/4 | 1 1/4-11 1/2 | 7/8 | 1/2 | 1-3/4 |

Type Codes for Double Threaded Fittings

| Potting Seal Type | Fitting Material | |
|-------------------|------------------|-----------------|
| | Brass | Stainless Steel |
| Low Temp Epoxy | CNA | CNN |
| Hi-Temp Cement | CNB | CNP |
| Silicone Rubber | CNC | CNQ |

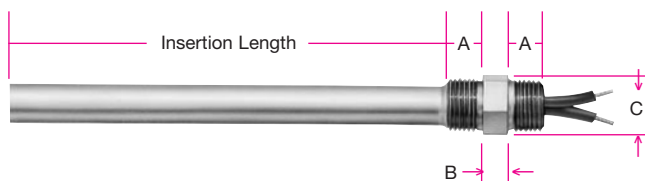

Potted end seals help to protect the heater from moisture or contamination from plastic material, cleaning solvents, or oils. The bushing cavity can be sealed with various materials such as:

- CNA/CNN Low temperature epoxy potting** — 266°F (130°C), UL rated to 194°F (90°C)
Teflon® leads internally connected, rated 392°F (200°C).
 - CNB/CNP Hi-temp cement potting w/ silicone varnish** — 1000°F (538°C)
Fiberglass leads internally connected, rated 482°F (250°C).
 - CNC/CNQ Silicone rubber potting** — 392°F (200°C)
Silicone rubber leads internally connected, rated 392°F (200°C).
 - CND/CNR High temperature epoxy potting** — 450°F (232°C)
Teflon® leads internally connected, rated 392°F (200°C).
- A minimum of 1/4" unheated section below the bushing is required.
➤ **Standard 10" (254 mm) leads. Specify longer leads.**

Cartridge Heater Immersion Heater Top Hat Screw Plug Termination

Type TH Top Hat Screw Plug


Available on HDC (except 1/8") and HDM cartridge heaters

This heater has a header cap as an integral part of the fitting. Leads exit through small holes which are sealed with epoxy for moisture protection.

Low temperature epoxy potting — 266°F (130°C),
UL rated to 194°F (90°C)

Teflon® leads internally connected, rated 392°F (200°C).

➤ **Standard 10" (254 mm) leads. Specify longer leads.**

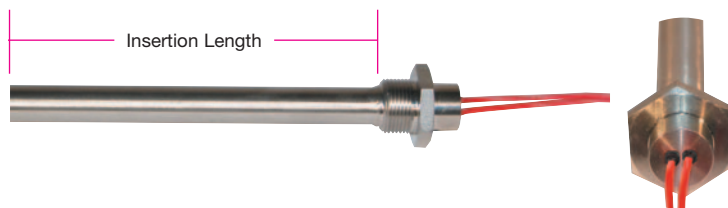

Cartridge Heater — Bulkhead Fitting Termination


Type BF Bulkhead Fitting

Available on HDC and LDC 1/2" and 5/8" cartridge heaters

A 5/8-18 UNF fitting is attached to the end of the cartridge heater to allow for mounting the heater to the wall of a tank or enclosure. Brass fittings are silver brazed and stainless steel fittings are heli-arc welded. Includes a copper washer and jam nut. The lead wires are internally connected. Available with the potting seals listed in the table.

Type Codes for Bulkhead Fittings

| Potting Seal Type | Fitting Material | |
|-------------------|------------------|-----------------|
| | Brass | Stainless Steel |
| Low Temp Epoxy | BFA | BFJ |
| Silicone Rubber | BFB | BFK |
| Hi-Temp Epoxy | BFC | BFL |

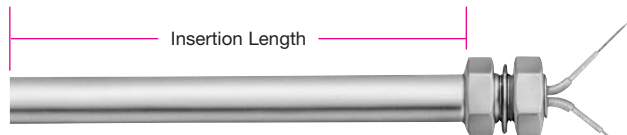

Potted end seals help to protect the heater from moisture or contamination from plastic material, cleaning solvents, or oils. The fitting cavity can be sealed with various materials such as:

- BFA/BFJ Low temperature epoxy potting** — 266°F (130°C), UL rated to 194°F (90°C)
Teflon® leads internally connected, rated 392°F (200°C).
 - BFB/BFK Silicone rubber potting** — 450°F (232°C)
Silicone rubber leads internally connected, rated 392°F (200°C).
 - BFC/BFL High temperature epoxy potting** — 450°F (232°C)
Teflon® leads internally connected, rated 392°F (200°C).
- A minimum of 1/4" unheated section below the bushing is required.
➤ **Standard 10" (254 mm) leads. Specify longer leads.**

Options

Cartridge Heater Mounting Flange Options

Type MFR Mounting Flange — Round


Available on HDC, HDM, and LDC cartridge heaters

Recommended for applications where excessive vibration exists and may cause the heater to back out of its mounting hole. The 16 ga. 304 SS flange is used as a means of securing the cartridge heater in place.

The default position of the flange is flush with the lead end. Specify the position of the flange when ordering.



Available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping with flush flange only

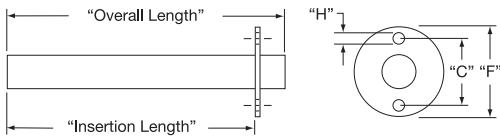

Standard Round Mounting Flanges

| Heater Diameter in (mm) | "F" | | "C" | | "H" | |
|--|-------|-------|-------|-------|------|------|
| | in | mm | in | mm | in | mm |
| 1/4 (6.35), 5/16 (7.94), 3/8 (9.53), 1/2 (12.70), 5/8 (15.88), 3/4 (19.05) | 1-1/2 | 38.10 | 1-1/8 | 28.57 | .156 | 3.97 |
| 7/8 (22.23), 1 (25.40), 1-1/4 (31.80) | 2 | 50.80 | 1-5/8 | 41.28 | .203 | 5.16 |




Note: 5/16" dia. cartridge heater can only be HDC; 7/8" and 1-1/4" can only be LDC.

Type MFH Mounting Flange — Hex

Available on HDC, HDM, and LDC cartridge heaters

A hex shape allows the possibility of using a wrench when removal is tight. The 16 ga. 304 SS flange is used as a means of securing the cartridge heater in place.

The default position of the flange is flush with the lead end. Specify the position of the flange when ordering.

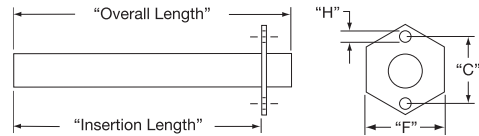

Standard Hex Mounting Flanges

| Heater Diameter | | "F" | | "C" | | "H" | |
|-----------------|-------|-------|-------|---------|-------|------|------|
| in | mm | in | mm | in | mm | in | mm |
| 1/4 | 6.35 | 1 | 25.40 | 3/4 | 19.05 | .144 | 3.66 |
| 5/16 | 7.94 | 1 | 25.40 | 3/4 | 19.05 | .144 | 3.66 |
| 3/8 | 9.53 | 1 | 25.40 | 3/4 | 19.05 | .144 | 3.66 |
| 1/2 | 12.70 | 1-3/8 | 34.93 | 1-5/32 | 29.37 | .187 | 4.76 |
| 5/8 | 15.88 | 1-3/8 | 34.93 | 1-5/32 | 29.37 | .187 | 4.76 |
| 3/4 | 19.05 | 1-3/8 | 34.93 | 1-5/32 | 29.37 | .187 | 4.76 |
| 7/8 | 22.26 | 1-7/8 | 47.63 | 1-9/16 | 39.69 | .203 | 5.16 |
| 1 | 25.40 | 1-7/8 | 47.63 | 1-9/16 | 39.69 | .203 | 5.16 |
| 1-1/4 | 31.80 | 1-7/8 | 47.63 | 1-11/16 | 42.86 | .203 | 5.16 |

Custom Mounting Flanges available upon request. Consult Tempco with your requirements.

Cartridge Heater Lead Wire with Strain Relief Options



Type S3 Lead Wire Strain Relief

Available on HDC, HDM, and LDC cartridge heaters


Strain relief clip for leads subject to tension and stress. A "T" type strain relief is silver brazed to the sheath.

Type S4 Right-Angle Lead Wire Strain Relief

Available on HDC, HDM, and LDC cartridge heaters

Strain relief clip for leads subject to tension and stress. A "T" type strain relief is silver brazed to the sheath and bent at a 90° angle.


Cartridge Heater Option — Angled Sheath

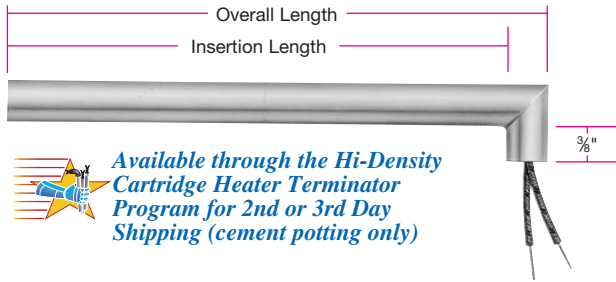

Type R3 Angled Sheath Extension

Available on HDC, HDM, and LDC cartridge heaters

The sheath extension is welded to the cartridge at a 90° angle. The standard sheath extension is 3/8" long. Specify when ordering if a longer sheath extension is required. If abrasion resistance is required, armor cable or stainless steel wire braid can be attached to the sheath extension. Available with various lead wire types and potted end seals.

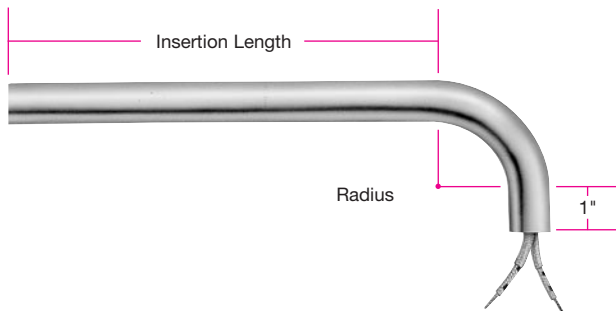

Type R4 Bent Cartridge


Available on HDC and HDM cartridge heaters

The heater sheath itself is bent to 90°. The bend is through a required unheated section. The standard sheath extension past the bend is 1". Specify when ordering if a longer sheath is required.

| | | | | | | | |
|----------------|----|-------|-------|-------|-------|-------|-------|
| Cartridge Dia. | in | 1/4 | 3/8 | 1/2 | 5/8 | 3/4 | 1 |
| | mm | 6.35 | 9.53 | 12.70 | 15.88 | 19.05 | 25.40 |
| Bend Radius | in | 5/8 | 5/8 | 3/4 | 1 | 1-1/4 | 1-1/2 |
| | mm | 15.88 | 15.88 | 19.05 | 25.40 | 31.75 | 38.10 |

Other Sheath Options

Cartridge Heater Locating Ring

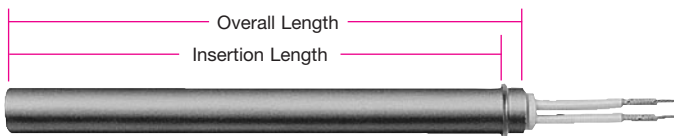

Available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping

Type LR Locating Ring

Available on HDC, HDM, and LDC cartridge heaters

A locating ring can be attached to the heater to aid in positioning the heater for the application.

The default position of the ring is 1/4" from the lead end. Specify the position of the ring when ordering.

Cartridge Heater Pull Strap





Available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping

Type PS Pull Strap

Available on HDC, HDM, and LDC cartridge heaters

A nickel wire rope is silver brazed to the lead end of the cartridge heater sheath to assist in removing the heater.

Cartridge Heater Terminal Box Options

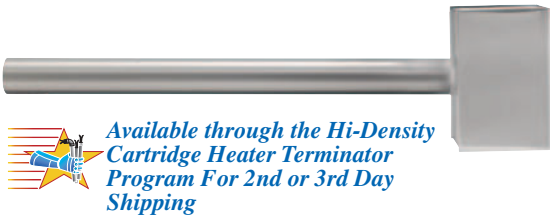


Type E1 General Purpose Terminal Box

Available on HDC, HDM, and LDC cartridge heaters

General purpose Stainless Steel NEMA 1 electrical enclosure designed to provide protection from electrical shock. The boxes have a 5/8" conduit knockout and are welded or brazed to the cartridge sheath.

➤ A termination must be specified separately.

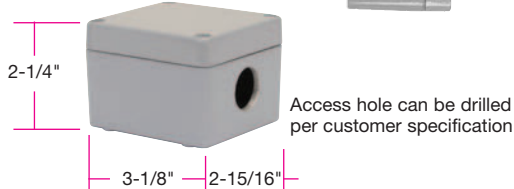

Type E2 Moisture Proof Terminal Box

Available on HDC, HDM, and LDC cartridge heaters

NEMA 4 aluminum electrical enclosures provide protection from splashing or hose directed water, external condensation and water seepage. The box is mechanically attached to the cartridge sheath.

➤ A single 5/8" access hole is standard.

➤ A termination must be specified separately.

NOTE: Potted End Seal M2C (high temperature epoxy) or M2D (low temperature epoxy) is recommended.



Type E4 General Purpose Terminal Box (mailbox style)

Available on HDC, HDM, and LDC cartridge heaters

General purpose Stainless Steel NEMA 1 electrical enclosure designed to provide protection from electrical shock. The box is welded or brazed to the cartridge sheath.

➤ A termination must be specified separately.



Type E5 Octagon Terminal Box

Available on HDC, HDM, and LDC cartridge heaters

General purpose steel NEMA 1 electrical enclosure designed to provide protection from electrical shock. The box is welded to the cartridge sheath.


➤ A termination must be specified separately.

Type E3 Explosion Resistant Terminal Box Options

Available on HDC and HDM cartridge heaters 1/2" diameter and larger.

NEMA 4/7 electrical enclosures provide protection from contaminants, moisture, and hazardous conditions. These housings are screwed onto a heater with a single or double ended Brass or Stainless Steel fitting.

- A threaded fitting mounting termination must be specified. See pages 2-50 and 2-51.
- Other terminal box configurations available upon request.

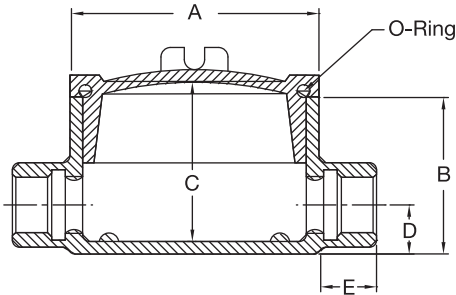


Style **E3C**



Housing E3C Dimensions

| Heater Diameter(s) | Hub Size NPT | "A" (in) | "B" (in) | "C" (in) | "D" (in) | "E" (in) |
|--------------------|--------------|----------|----------|----------|----------|----------|
| 1/2 & 5/8 | 1/2-14 | 2-1/2 | 2-1/4 | 2-3/16 | 5/8 | 7/8 |
| 3/4 | 3/4-14 | 2-1/2 | 2 | 2 | 3/4 | 7/8 |
| 1 | 1-11/2 | 3-1/2 | 2-5/16 | 2-3/16 | 7/8 | 1 |

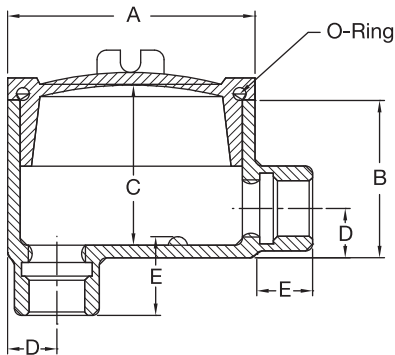


Style **E3D**



Housing E3D Dimensions

| Heater Diameter(s) | Hub Size NPT | "A" (in) | "B" (in) | "C" (in) | "D" (in) | "E" (in) |
|--------------------|--------------|----------|----------|----------|----------|----------|
| 1/2 & 5/8 | 1/2-14 | 2-1/2 | 2-1/4 | 2-3/16 | 5/8 | 7/8 |
| 3/4 | 3/4-14 | 2-1/2 | 2-1/2 | 2-7/16 | 3/4 | 7/8 |
| 1 | 1-11/2 | 3-1/2 | 2-5/16 | 2-3/16 | 7/8 | 1 |

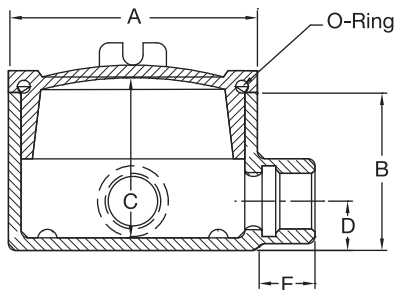

Style **E3L**



Housing E3L Dimensions

| Heater Diameter(s) | Hub Size NPT | "A" (in) | "B" (in) | "C" (in) | "D" (in) | "E" (in) |
|--------------------|--------------|----------|----------|----------|----------|----------|
| 1/2 & 5/8 | 1/2-14 | 2-1/2 | 2-1/4 | 2-3/16 | 5/8 | 7/8 |
| 3/4 | 3/4-14 | 2-1/2 | 2-1/2 | 2-7/16 | 3/4 | 7/8 |
| 1 | 1-11/2 | 3-1/2 | 2-5/16 | 2-3/16 | 7/8 | 1 |



Explosion resistant terminal housings are intended to provide containment of an explosion in the enclosure only. No portion of the heater assembly outside the enclosure is covered under this NEMA rating. Abnormal use of a heater which results in excessive temperature can create hazardous conditions such as a fire. Never perform any type of service nor remove the housing cover prior to disconnecting all electrical power to the heater.

Cartridge Heaters



Lead Wire Options

Cartridge Heater Options — Lead End Connections

Type RT Ring Terminal

Type ST Spade Terminal

Type QTA 1/4" Female Straight Quick Disconnect

Type QTB 1/4" Female Right-Angle Quick Disconnect

Available on HDC, HDM and LDC cartridge heaters

Various types of crimp terminals can be attached to the heater leads to make wiring into applications quick and easy. Non-insulated and insulated with nylon (221°F/105°C) or PVC (194°F/90°C).



Note: Specify insulation type and ring size (#6, #8, or #10) when ordering. Standard is a non-insulated #10 terminal. Consult Tempco with your requirements.



Type RT



Type ST



Type QTA



Type QTB

Type P Quick Disconnect Plugs


Available on HDC, HDM, and LDC cartridge heaters

Allows for the quick and easy replacement of the heater. The plug can be attached to galvanized armor cable, stainless steel armor cable, or wire braid.

Plug Type

Description

- | Plug Type | Description |
|-----------|---|
| 1 | 2-pole/2-wire twist locking plug, 15 amp 125 volt NEMA L1-15P (Part Number EHD-102-102) |
| 2 | 2-pole/3-wire twist locking plug, 15 amp 125 volt or 10 amp 250 volt NEMA N/A. (Part Number EHD-102-107) NOTE: This plug is not listed by UL, and is recommended for replacement use only. |
| 3 | 2-pole/3-wire straight blade plug, 15 amp 125 volt NEMA 5-15P (Part Number EHD-102-103) |
| 4 | 2-pole/3-wire twist locking plug, 15 amp 125 volt NEMA L5-15P (Part Number EHD-102-113) |
| 5 | 2-pole/3-wire twist locking plug, 15 amp 250 volt NEMA L6-15P (Part Number EHD-102-121) |
| 6 | 2-pole/3-wire twist locking plug, 20 amp 250 volt NEMA L6-20P (Part Number EHD-102-231) |
| 8 | 2-pole/3-wire straight blade plug, 15 amp 250 volt NEMA 6-15P (Part Number EHD-102-114) |
| 9 | 2-pole/3-wire twist locking plug, 20 amp 250 volt NEMA L2-20P (Part Number EHD-102-104) NOTE: For other types of plugs, consult Tempco or specify the manufacturer's part number when ordering. See page 15-15 for additional information. |

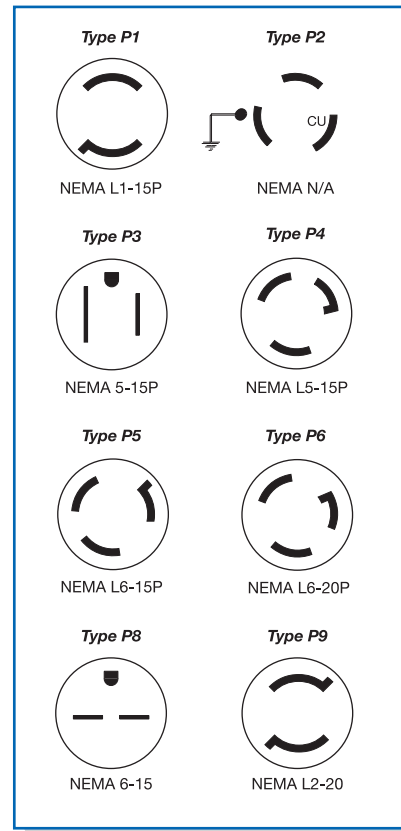

Caution! Voltage and Amperage ratings of heater and plug must match.



Available through the Hi-Density Cartridge Heater Terminator Program for Same or Next Day Shipping

Cartridge Heater Lead Wire Options

Type MIL High Temperature Lead Wire

Available on HDC, HDM and LDC cartridge heaters

When required, high temperature lead wire can be used on most cartridge heaters. The stranded wire is insulated with mica tapes and then a treated fiberglass overbraid.

- Maximum temperature rating: 450°C (842°F)

Type TL Teflon® Leads

Available on HDC and HDM cartridge heaters

- Maximum temperature rating: 200°C (392°F)

Type HA Heat Shrink Covered Armor Cables

Available on HDC, HDM and LDC cartridge heaters

➤ Either the galvanized or stainless steel armor cable can be covered with moisture proof heat shrink Polyolefin tubing.

Type HTL Very High Temperature Lead Wire

Available on HDC, HDM and LDC cartridge heaters

When required, high temperature lead wire can be used on most cartridge heaters. The stranded wire is insulated with mica composite and then a treated fiberglass overbraid.

- Available wire gauge sizes: 10-18
- Maximum temperature rating: 550°C (1022°F)

Type FS Uncoated Fiberglass Slewing

Available on HDC, HDM and LDC cartridge heaters

For effective thermal and mechanical protection, the lead wires can be covered with uncoated fiberglass slewing.

FSA Uncoated Fiberglass slewing on each lead separately

FSB Uncoated Fiberglass slewing on both leads together

- Specify length when ordering.
- Maximum temperature rating: 1112°F (600°C)

Type SR Silicone Rubber Coated Fiberglass Slewing

Available on HDC, HDM and LDC cartridge heaters

For added protection, strength, and resistance to various chemicals, the lead wires can be covered with silicone rubber slewing.

SRA Silicone rubber coated fiberglass slewing on each lead separately

SRB Silicone rubber coated fiberglass slewing on both leads together

- Specify length when ordering.
- Maximum temperature rating: 200°C (392°F)

Consult Tempco with your requirements. We welcome your inquiries.

Cartridge Heater Options — Sheath Surface and Sheath Material

Type IS Incoloy® Sheath

Available on HDC and HDM cartridge heaters.

The standard sheath material for all Hi-Density Cartridge Heaters except 1" diameter is 321 stainless steel; standard for 1" diameter is 304 stainless steel. The incoloy sheath option is available on all diameters except 1/8", 5/16", 8 mm and 20 mm.

To assist you in selecting the proper sheath material, corrosion resistant ratings and chemical properties of various heater sheath materials are given in Section 16, Engineering Data, in the back of this catalog.

Type DSM Other Special Sheath Materials

If your application requires a specific alloy sheath material other than described in Type IS above, consult Tempco with your requirements.

Type PAS Passivation

Available on HDC, HDM, and LDC cartridge heaters.

Passivating is a chemical process accomplished by dipping the heater in a solution of nitric acid. The process removes surface contamination, usually iron, so that the optimum corrosion resistance of the stainless steel is maintained.

Type OAL Special Length Tolerance

Available on HDC, HDM, and LDC cartridge heaters.

If a special length tolerance different than the standard length tolerance specified on page 2-4 is required, consult Tempco with your requirements.

Type ELP Electro-Polish

Available on HDC, HDM, and LDC cartridge heaters.

Electro-Polishing is an electro-chemical process that removes surface imperfections and contaminants, enhancing the corrosion resisting ability of the heater sheath.

Type CG Centerless Grinding

Available on HDC and HDM cartridge heaters.

For applications requiring high precision fit and tolerance, the sheath can be centerless ground.

Tolerance: ±0.0005 inches (0.013 mm)

Specify diameter when ordering.

Type SDA End Disc Seals Silver Brazed

Type SDB End Disc Seals Heli-Arc Welded

Available on LDC cartridge heaters.

End discs on HDC and HDM cartridge heaters are heli-arc welded as standard.

The normally mechanically attached end discs on LD cartridge heaters can be silver brazed or heli-arc welded if desired.

Cartridge Heater With Built-In Internal Thermocouples

Built-in Internal Thermocouples are available on all HDC, HDM, and LDC cartridge heater diameters except for 3/16", 5/16" and 8 mm.



Notes: Type TJ4 and TK4 are not available on 1/4" and 6.5 mm diameter cartridges.

Minimum sheath length: 3" for 1/4", 3/8" and 1/2" diameter. 4" for 5/8" and 3/4" diameter.

10" leads are standard for both heater and thermocouple. Leads are internally connected. Specify longer leads.

| ANSI Code | Conductor Characteristics | | Temperature Range | |
|-----------|---------------------------|------------------------------|-------------------|-------------|
| | Positive | Negative | °F | °C |
| J | Iron (Magnetic) | Constantan (Non-Magnetic) | 0 to 1400 | -17 to 760 |
| K | Chromel (Non-Magnetic) | Alumel (Magnetic) | 0 to 2300 | -17 to 1260 |

For other thermocouple types consult Tempco.

Type TJ1 and TK1



Type TJ1 and TK1 Grounded at Disc End

The thermocouple junction is grounded to the sheath at the disc end and packed with MgO. The concave end disc is filled with silver solder and ground flat. When inserted into a flat end blind hole, it will provide fast responsive temperature readings. Widely used in Hot Runner mold probes.

TJ1 Type J thermocouple; **TK1** Type K thermocouple

Type TJ2 and TK2



Type TJ2 and TK2 Ungrounded at Disc End

The thermocouple junction is ungrounded, located at the end of the heater section, 1/8" behind the end disc and packed with MgO. Only provides reference temperature reading of the part being heated – slower response.

TJ2 Type J thermocouple; **TK2** Type K thermocouple

Type TJ3 and TK3



Type TJ3 and TK3 Ungrounded at Center

The thermocouple junction is ungrounded and is located in the center of the length and diameter of the cartridge heater. It provides internal temperature readings of the heater core. Generally used for research applications and is not recommended for controlling process temperatures.

TJ3 Type J thermocouple; **TK3** Type K thermocouple

Type TJ4 and TK4



Type TJ4 and TK4 Grounded at Center

The thermocouple junction is grounded to the sheath in a 1/2" unheated section located in the center of the cartridge length unless otherwise specified. It provides good temperature readings with quick response.

TJ4 Type J thermocouple; **TK4** Type K thermocouple

Type TJ5 and TK5



Type TJ5 and TK5 Grounded at Lead End

The thermocouple junction is grounded to the sheath at the lead end. A minimum of 3/8" of cold section is required. It provides good temperature readings with quick response.

TJ5 Type J thermocouple; **TK5** Type K thermocouple



Note: For a complete selection of standard Hi-Density Pennybottom™ Cartridge Heaters, with built-in Type J thermocouple for Hot Runner plastic molds, see pages 2-24 through 2-26.

Available from stock.


Cartridge Heater Options — Internal Power Variations



Type DW Distributed Wattage

Available on HDC and HDM cartridge heaters


Cartridge heaters can be designed to vary the wattage along the length of the heater. Specify number of zones and the required watts and length per zone starting from the disk end. Leads can be connected externally or internally. Picture shows a heater with Type N externally connected leads. Heaters with other terminations may require a longer cold section at the lead end.



Type 3PH Three Phase

**Available on HDC, HDM, and LDC cartridge heaters
1/2" diameter and larger (See page 2-4)**

In order to minimize the gauge of the wiring on high wattage cartridge heaters, 3-phase elements can be designed.




Type DV Dual Voltage

**Available on HDC, HDM, and LDC cartridge heaters
3/8" diameter and larger (See page 2-4)**

3/8" and 1/2" diameter heaters may require a larger diameter transition area at lead end.

Cartridge heaters can be designed using 3-wire series/parallel circuits for dual voltage applications. Whether the heater is run on the high or low voltage, the wattage will be the same.


DV1 120/240 volts **DV2** 240/480 volts



Type DWV Dual Circuits

**Available on HDC, HDM, and LDC cartridge heaters
1/2" diameter and larger (See page 2-4)**

Independent resistance elements can be designed in a single cartridge heater for added versatility.




Type MHZ Multiple Heat Zones (3-Zones Maximum)

**Available on HDC and HDM cartridge heaters
3/8" diameter and larger (See page 2-4)**

3/8" and 1/2" diameter heaters may require a larger diameter transition area at lead end.


Multiple independently operated sections of the heater with a common wiring connection can be designed for increased flexibility.



Type GJ Grounded Element Winding

Available on HDC, HDM, and LDC cartridge heaters

For DC applications where the electrical circuit is negative grounded, the cartridge heater can be designed with one side of the element winding grounded to the sheath and a single lead wire exiting the cartridge heater.



Type GL Ground Lead/Sheath

Available on HDC, HDM, and LDC cartridge heaters

For those applications requiring a separate ground lead attached to the cartridge heater sheath.

Standard ground lead wire is a 10" long insulated stranded conductor. Optional insulated and color coded leads are available.



Available through the Hi-Density
Cartridge Heater Terminator Program
for 2nd Day Delivery

Options

Cartridge Heater Internal Sensor and Control Options

Type TF Thermal Fuses

Available on HDC, HDM, and LDC cartridge heaters 1/2" diameter and larger

Thermal fuses can be built into cartridge heaters to act as a high limit for the heater in applications where the temperature must be limited to avoid dangerous situations. When the trigger point is reached, the thermal fuse will open, cutting the electrical current to the cartridge heater. Once the thermal fuse opens, it cannot be reset. Many different trigger temperatures are available.

Type TS Thermostat

Available on HDC, HDM, and LDC cartridge heaters 5/8" diameter or larger

Cartridge heaters with built-in thermostats are very efficient and economical for heating and controlling temperatures. Available with NPT or special type mounting fittings, they provide a self-contained heater mainly recommended for immersion applications. They can also be used as over-temperature safety devices. The thermostats are factory preset for the trip temperature; therefore, prototyping and testing is required to determine the exact fixed setpoint. Maximum temperature—302°F (150°C). Maximum Amps—8@120 Volts.

A minimum 2-1/2" cold section is required to house the thermostat. Consult Tempco with your requirements.

Type TM Thermistor


Type RD RTD Temperature Sensors

Available on HDC, HDM, and LDC cartridge heaters

Tempco has the ability to custom design cartridge heaters with built-in temperature sensors such as thermistors and RTDs. For specific applications that have a limited or single set point range, thermistors or RTDs in conjunction with simple electronic controllers can be an economical choice.

NOTE: For thermocouples see page 2-58.

Type TS

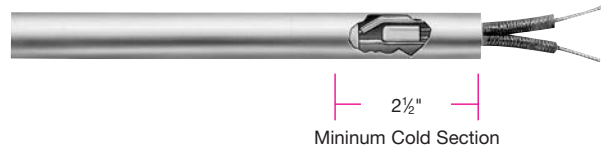

Cartridge Heater Option — Inspection Services and Test Reports

Standard Electrical Tests and Optional Test Reports

1. Resistance test — measures ohms at room temperature.
2. IR (insulation resistance) test — measures the insulation resistance to the flow of current. Standard test is done at 500VDC.
3. Hipot (high potential) test — a high voltage is applied between a product's current carrying conductors and its metallic enclosure to verify that the insulation is sufficient to protect the operator from electrical shock.
4. Leakage current test — measures the current that flows from any conductive part to ground.
5. Heaters can be serialized and test reports can be sent with each shipment if required. Contact Tempco with your requirements.

Optional Die Penetrant Test

This non-destructive testing can detect imperfections in weld joints. For critical applications, each individual heater's weld joints by end cap and fittings can be tested. Certified test reports will be sent with each shipment. Consult Tempco for details.

Optional Hydrostatic Pressure Test

Cartridge heaters with attached pipe fittings can be pressure tested to your specifications at Tempco. Our in-house testing capabilities can ensure that your products meet your exact specifications. Contact Tempco with your requirements.

LDA and HAC Forced Air In-Line Process Cartridge Heaters

TEMPCO manufactures a variety of Air Process Cartridge Heaters. They can be standard units or designed to the customer's specifications. The following diameter sizes are available: 3/8", 1/2", 5/8" and 3/4".

These diameters can be adapted with various types of fittings and made into any practical length.

See Section 11, Pages 11-74 through 11-77
for complete details

