


Noble Metal Thermocouples

Design Features

* Noble Metal Thermocouple Elements ANSI Type R and S are provided in accordance with ITS90, and ANSI Type B is provided in accordance with IPTS-68.


* Alumina insulators are recommended with noble metal thermocouples. All noble metal elements have a butt-welded junction & are available in 20 ga. (.032"), 24 ga. (.020") and 30 ga. (.010").

Style NB – Noble Bare Thermocouple Wire

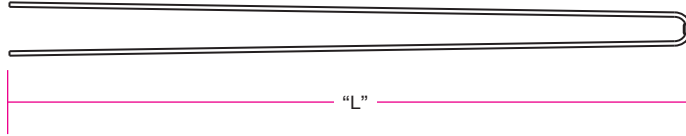


Ordering Information

Noble Metal Thermocouple Element Style NB is offered with the options listed below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

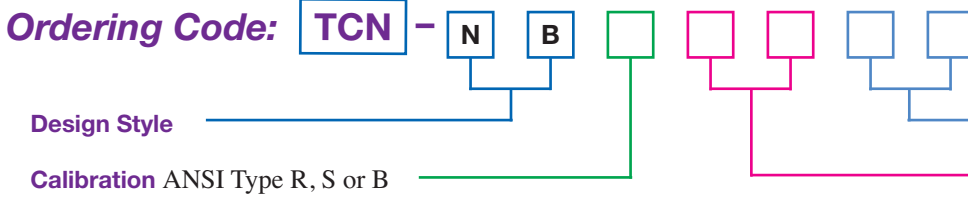


Style NZ – Noble Thermocouple Wire with 2-Hole Round Alumina Insulator

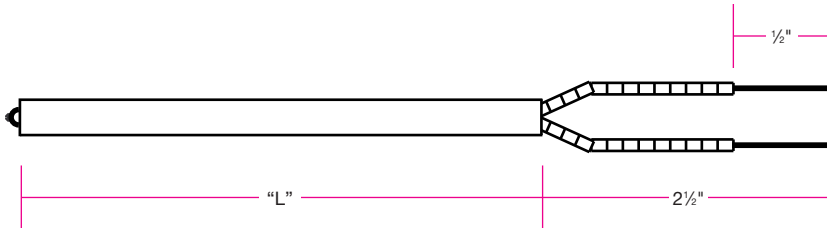

Ordering Information

Noble Metal Thermocouple Element with 2-hole Alumina insulator Style NZ is offered with the options listed below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

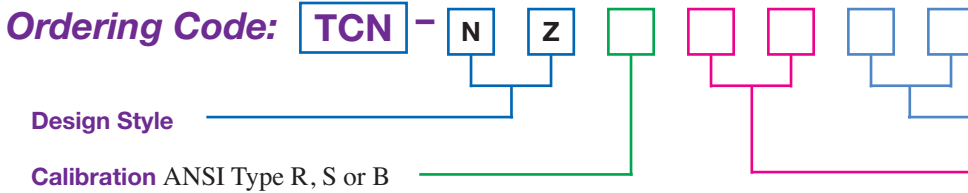

- 30 ga. Insulator P/N COR-124-105 and P/N CER-103-101 Ceramic Beads
- 24 ga. Insulator P/N COR-124-104 and P/N CER-103-101 Ceramic Beads
- 20 ga. Insulator P/N COR-124-106 and P/N CER-103-101 Ceramic Beads

* See Page 14-96 for Insulator Dimensions *

For Metal and Ceramic Protection Tubes
see pages 14-85 and 14-86.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.


(800) 323-6859 • Email: sales@tempco.com

Ceramic Protection Tubes Application Data

Ceramic Protection Tubes are used in applications where contamination from hostile environments or the cutting action of concentrated and direct flame impingement are factors. Such conditions usually require a noble metal thermocouple such as platinum and platinum alloys.

When selecting assemblies using ceramic components, the expected maximum temperatures must be considered. At elevated temperatures, some ceramic materials go through a glass phase. As silica is a prime contaminant of platinum, alumina protecting tubes and insulators are recommended for temperatures exceeding 2000°F (1093°C).

Material	Maximum Operating Temperature	Thermal Shock Characteristics	Maximum Available Length (in)	Typical Applications	Remarks
Alumina (99.7%)	3100°F (1700°C)	Fair (preheating to 900°F [482°C] recommended)	84	Iron, Barium, crown glass; non-ferrous metals; gas-tight protection for noble metal thermocouples in excess of 2400°F (1316°C)	Sags at 2900°F (1593°C) Prevents dry hydrogen penetration
Porcelain (Mullite)	2550°F (1400°C)	Poor (preheating to 900°F [482°C] recommended)	84	Non-ferrous metals; gas-tight protection for noble metal thermocouples to 2400°F (1316°C)	Sags at 2550°F (1400°C) Prone to attack by halogen gases; some penetration of dry hydrogen. Contains silica.

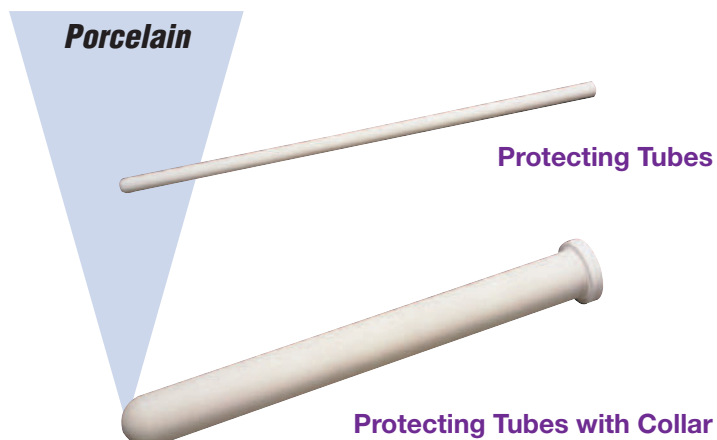

Part Number	I.D. x O.D. [†]	Construction	Length
APT-101- <input type="text"/>	¼" x ⅜"	Plain End	12" thru 48" in 6" increments
APT-102- <input type="text"/>	⅞" x 1½"	Plain End	12" thru 60" in 6" increments
APT-103- <input type="text"/>	¾" x 1"	Plain End	12" thru 72" in 6" increments
APT-104- <input type="text"/>	1" x 1¼"	Plain End	12" thru 72" in 6" increments
APT-105- <input type="text"/>	¼" x ⅜"	With Hex Fitting	12" thru 48" in 6" increments
APT-106- <input type="text"/>	⅞" x 1½"	With Hex Fitting	12" thru 60" in 6" increments

Part Number	I.D. x O.D. [†]	Construction	Length
PPT-101- <input type="text"/>	¼" x ⅜"	Plain End	12" through 84" inch 6" increments
PPT-102- <input type="text"/>	⅞" x 1½"	Plain End	
PPT-103- <input type="text"/>	¾" x 1"	Plain End	
PPT-104- <input type="text"/>	1" x 1¼"	Plain End	
PPT-105- <input type="text"/>	¼" x ⅜"	w/ Collar Approx. ⅝" x ¾"	
PPT-106- <input type="text"/>	⅞" x 1½"	w/ Collar Approx. ⅝" x 1½"	
PPT-107- <input type="text"/>	¾" x 1"	w/ Collar Approx. ⅝" x 1⅜"	
PPT-108- <input type="text"/>	1" x 1¼"	w/ Collar Approx. ⅝" x 1⅜"	
PPT-109- <input type="text"/>	¼" x ⅜"	w/Hex Fitting	
PPT-110- <input type="text"/>	⅞" x 1½"	w/Hex Fitting	

Ordering Information

Complete the Part Number with 3 digits indicating length in whole inches.

Example: = APT-105- is 12" long and PPT-107- is 48" long.

[†] Dimensional tolerance:
Up to 1" Dia. ±5% or .025", whichever is greater
Over 1" Dia. ±4% or .050", whichever is greater

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Metal Protection Tubes

Metal Protection Tubes

For longer life and continued accuracy, most thermocouples in industrial applications should be protected from physical damage, corrosion, and contamination by some type of

protecting tube or well. Metal tubes selected to suit the temperature, pressure and atmosphere are generally used with base metal thermocouples.



Typical Metal Protection Tube



Typical Cast Iron Protection Tube

Material	Maximum Operating Temperature	Typical Applications	Remarks
304 Stainless	1800°F (982°C)	Food and Dairy Products, Petroleum Products, Mild Acids, Alkalies	Embrittles in 800°F (427°C) to 1400°F (760°C) range.
Cast Iron	1300°F (704°C)	Molten Aluminum, Gas Ducts	Withstands sulphur and caustic solutions.
316 Stainless	1800°F (982°C)	Food and Dairy Products, Petroleum Products, Mild Acids, Alkalies	Greater corrosion resistance than 304 Stainless.
446 Stainless	2000°F (1093°C)	Sulphurous Atmospheres such as Hydrogen Sulphide, Neutral Salt Baths	Excellent resistance to corrosion and oxidation at high temperatures. Do not use in carburizing atmospheres.
Inconel 601®	2200°F (1204°C)	Neutral Salt Baths, Carburizing and Nitriding Atmospheres	Good resistance to corrosion at high temperatures; excellent resistance to oxidation at high temperatures. Do not use in carburizing atmospheres above 1000°F (538°C).
Black Steel Pipe per ASTM A120	1200°F (649°C)	Molten Babbitt, Tin, Lead, and Magnesium	Low Cost

304 Stainless Steel (8% Nickel-18% Chrome)

Part Number	I.D. x O.D.	NPT Thread	Const.	Length
*MPT-101-___	.622" x .840"	½"	Welded	12" and over in 6" increments
*MPT-102-___	.824" x 1.050"	¾"	Welded	
*MPT-103-___	1.049" x 1.315"	1"	Welded	

*If extra heavy wall is desired, specify.

Cast Iron

Part Number	I.D. x O.D.	NPT Thread	Const.	Length
MPT-104-___	⅞" x 1⅜"	¾" Int.*	Cast	12" thru 72" in 6" increments
MPT-105-___	⅞" x 1⅜"	1" Ext.	Cast	12" thru 48" in 6" increments

*1" NPT external thread available on special request.

316 Stainless Steel

Part Number	I.D. x O.D.	NPT Thread	Const.	Length
MPT-106-___	.622" x .840"	½"	Welded	12" and over in 6" increments
MPT-107-___	.824" x 1.050"	¾"	Welded	
MPT-108-___	1.049" x 1.315"	1"	Welded	

446 Stainless Steel (28% Chrome Iron)

Part Number	I.D. x O.D.	NPT Thread	Const.	Length
MPT-109-___	.622" x .840"	½"	Seamless	12" and over in 6" increments
MPT-110-___	.824" x 1.050"	¾"	Seamless	
MPT-111-___	1.049" x 1.315"	1"	Seamless	

Inconel Alloy 601® (60% Nickel-23% Chrome-14% Iron)

Part Number	I.D. x O.D.	NPT Thread	Const.	Length
MPT-112-___	.622" x .840"	½"	Seamless	12" and over in 6" increments
MPT-113-___	.824" x 1.050"	¾"	Seamless	
MPT-114-___	1.049" x 1.315"	1"	Seamless	

Black Steel Pipe (Per ASTM A120)

Part Number	I.D. x O.D.	NPT Thread	Const.	Length
MPT-115-___	.364" x .540"	¼"	Welded	12" and over in 6" increments
MPT-116-___	.302" x .540"	¼"	Welded	
MPT-117-___	.546" x .840"	½"	Welded	
MPT-118-___	.742" x 1.050"	¾"	Welded	
MPT-119-___	.957" x 1.315"	1"	Welded	

Ordering Information

Complete the Part Number with 3 digits indicating length in whole inches.


Example: = MPT-105-**012** is 12" long and
MPT-107-**048** is 48" long.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Thermocouple Insulators

Oval—Double Hole Cordierite


Maximum Temperature: 2282°F (1250°C)

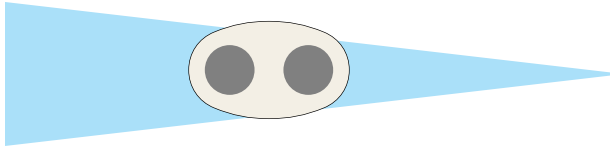

Part Number	Width (in)	Thickness (in)	Bore (in)	Max. B & S Gauge Size	Length (in)
COR-120-105	.437	.250	.156	7	1
COR-120-104	.375	.217	.110	10	1
COR-120-106	.172	.118	.042	19	1

Round—Single Hole Mullite


Maximum Temperature: 2900°F (1593°C)

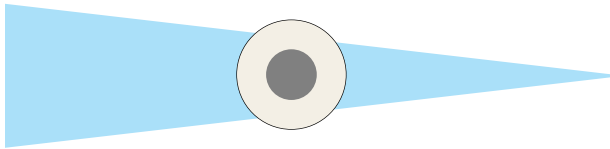

Part Number	Diameter (in)	Bore (in)	Max. B & S Gauge Size	Length (in)
COR-123-101	.062	.031	22	12
COR-123-102	.125	.062	16	12
COR-123-103	.187	.094	12	12

Round—Double Hole Alumina


Maximum Temperature: 3300°F (1815°C)

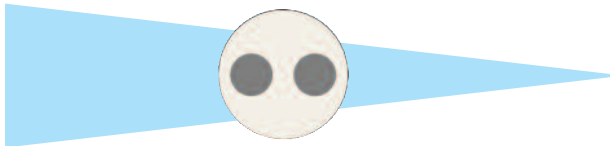

Part Number	Diameter (in)	Bore (in)	Max. B & S Gauge Size	Length (in)
COR-124-101	.125	.031	22	1
COR-124-102	.125	.031	22	2
COR-124-103	.125	.031	22	3
COR-124-104	.125	.031	22	12
COR-124-105	.062	.016	28	12
COR-124-106	.187	.040	20	12

Round—Double Hole Mullite

Maximum Temperature: 2400°F (1315°C)

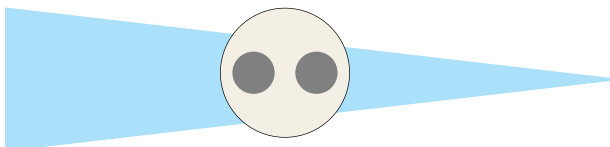


Part Number	Diameter (in)	Bore (in)	Max. B & S Gauge Size	Length (in)
COR-125-101	.156	.046	18	1
COR-125-102	.156	.046	18	3
COR-126-101	.250	.085	13	1
COR-126-102	.250	.085	13	3
*COR-127-101	.437	.156	7	1
*COR-127-102	.437	.156	7	3

*Material is Cordierite

Round—Four Hole Alumina


Maximum Temperature: 3300°F (1815°C)

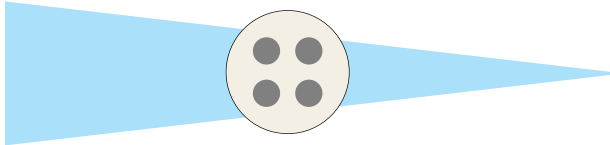

Part Number	Diameter (in)	Bore (in)	Max. B & S Gauge Size	Length (in)
COR-128-101	.187	.047	18	1
COR-128-102	.312	.078	13	1

Fish Spine—Ball and Socket Insulators—Steatite

Maximum Temperature: 2400°F (1315°C)

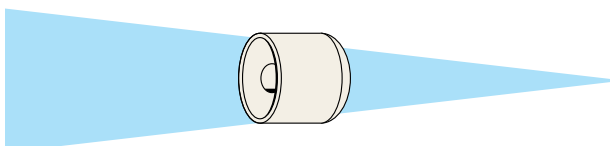

Part Number	Diameter (in)	Bore (in)	Max. B & S Gauge Size	Length (in)	Number of Pcs. per Sleeve
CER-103-101	.110	.056	16	.110	67 pcs/6"
CER-103-102	.170	.068	14	.170	86 pcs/12"
CER-103-104	.200	.092	12	.200	Bulk Loose
CER-103-105	.330	.124	9	.330	Bulk Loose
CER-103-106	.400	.156	7	.400	Bulk Loose
CER-103-109	.260	.156	7	.260	Bulk Loose