


## Terminations

### Low-Profile Button Terminals: Type B1, Type B2 & Type B3

Available on any clamping or construction variation, the specially designed Stainless Steel Button Terminals are internally connected to the heater and are resistant to over-torquing

while offering a low profile for tight spaces. They are virtually unbreakable. Secure tightening of the electrical connections is essential for safety and long heater life.

#### Duraband® Type B1 – Button Terminals

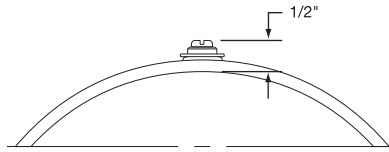


#### One-Piece Band

**Standard Termination Location:**  
each side of gap; center of width


- \* **Minimum Inside Diameter:** 2" (50.8 mm)
- \* **Minimum Width:** 1-1/2" (38.1 mm)
- \* **Screw Size:** 10-32 standard except 6-32 on IDs < 5"
- \* **Maximum Volts:** 480VAC
- \* **Maximum Amps:** 25A (10-32) or 20A (6-32)

#### Two-Piece Band

**Standard Termination Location:**  
next to gaps on each half;  
center of width



- \* **Minimum Inside Diameter:** 2" (50.8 mm)
- \* **Minimum Width:** 1-1/2" (38.1 mm)
- \* **Screw Size:** 10-32 standard except 6-32 on IDs < 5"
- \* **Maximum Volts/Amps:** 480VAC/ 25A (10-32) or 20A (6-32) each half




#### One-Piece Expandable Band

**Standard Termination Location:**  
each side of gap; center of width

- \* **Minimum Inside Diameter:** 2-1/2" (63.5 mm)
- \* **Minimum Width:** 1-1/2" (38.1 mm)
- \* **Screw Size:** 10-32 standard except 6-32 on IDs < 5"
- \* **Maximum Volts/Amps:** 480VAC/ 25A (10-32) or 20A (6-32)

#### Duraband Type B2 – Button Terminals

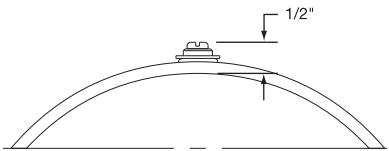


#### One-Piece Band

**Standard Termination Location:**  
next to gap; center of width


- \* **Minimum Inside Diameter:** 2" (50.8 mm)
- \* **Minimum Width:** 1-1/2" (38.1 mm)
- \* **Screw Size:** 10-32 standard except 6-32 on IDs < 5"
- \* **Maximum Volts:** 480VAC
- \* **Maximum Amps:** 25A (10-32) or 20A (6-32)

#### Two-Piece Band

**Standard Termination Location:**  
next to same gap on each half;  
center of width



- \* **Minimum Inside Diameter:** 2" (50.8 mm)
- \* **Minimum Width:** 1-1/2" (38.1 mm)
- \* **Screw Size:** 10-32 standard except 6-32 on IDs < 5"
- \* **Maximum Volts/Amps:** 480VAC/ 25A (10-32) or 20A (6-32) each half



#### One-Piece Expandable Band

**Standard Termination Location:**  
next to gap; center of width

- \* **Minimum Inside Diameter:** 2-1/2" (63.5 mm)
- \* **Minimum Width:** 1-1/2" (38.1 mm)
- \* **Screw Size:** 10-32 standard except 6-32 on IDs < 5"
- \* **Maximum Volts/Amps:** 480VAC/ 25A (10-32) or 20A (6-32)

**View Product Inventory @ [www.tempco.com](http://www.tempco.com)**