




**Element Configuration:** Elements can be U-bends, W-bends and foldback design depending on the requirements of the application.

**Selection and Sizing**  
See Page 11-107

**Installation and Wiring**  
See Page 11-111


**Standard Designs**  
See Page 11-113

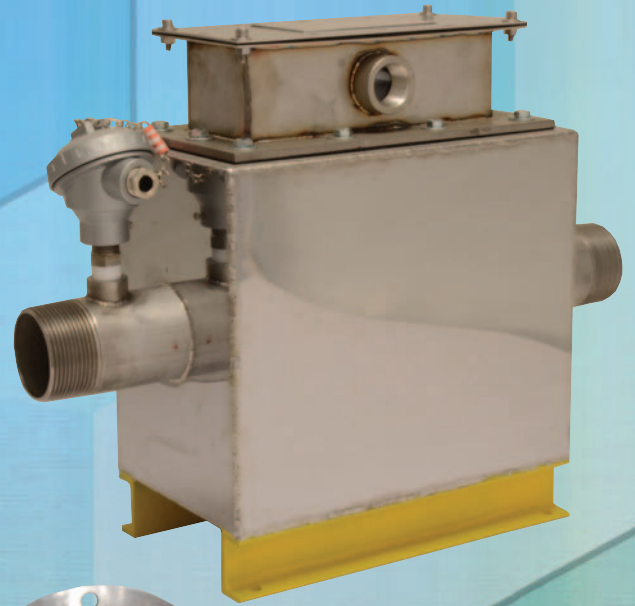

**Custom Designs**



**Duct Heater System:** Tempco can supply the heater and blower assembled, ready for connection to the application duct work. The pictured 48KW, 480V unit produces 1500 CFM of heated air to dry metal parts after being coated with a rust inhibitor.

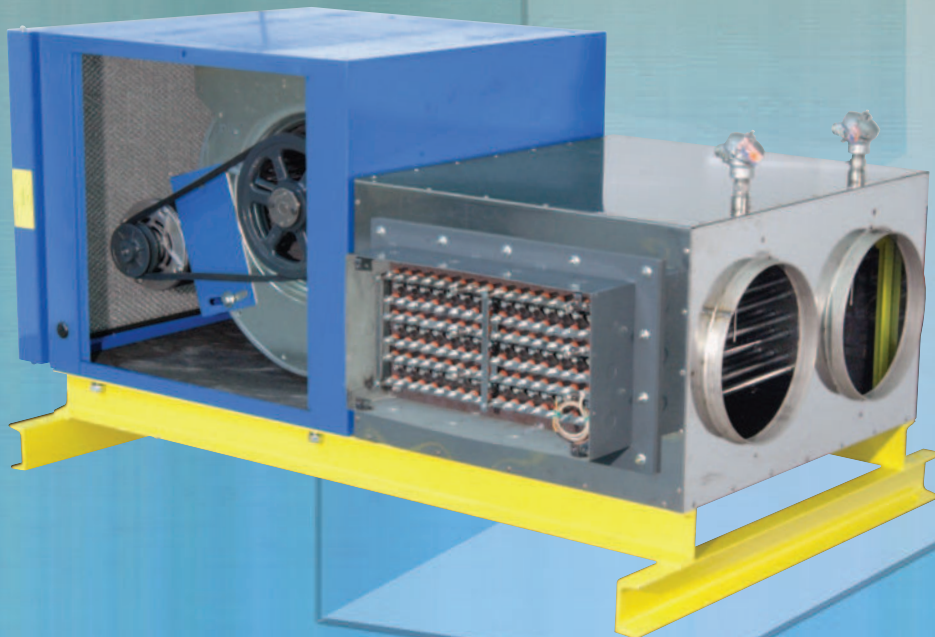

**Complete Your Thermal Loop System with a Tempco Power/Temperature Control Panel.**  
See pages 13-56 through 13-63.

**(800) 323-6859 • Email: [sales@tempco.com](mailto:sales@tempco.com)**