

Environmental & Physical

Operating Temperature: -10°C to 50°C

Storage Temperature: -40°C to 60°C

Humidity: 0 to 90% RH (non-condensing)

Altitude: 2000m maximum

Pollution: Degree 2

Insulation Resistance: 20 Mohms min. (at 500 VDC)

Dielectric Strength: 2000 VAC, 50/60 Hz for 1 minute


Vibration Resistance: 10-55 Hz, 10 m/s² for 2 hours

Shock Resistance: 200 m/s² (20 g)

Approval Standard

EMC: EN61326

Control Board Overlay Dimensions (mm)

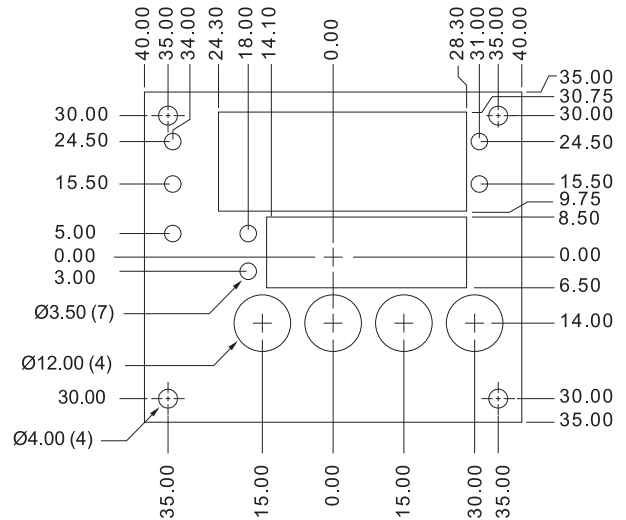

Control PC Board Dimensions (mm)

