


### Noble Metal Thermocouples

#### Design Features

\* Noble Metal Thermocouple Elements ANSI Type R and S are provided in accordance with ITS90, and ANSI Type B is provided in accordance with IPTS-68.


\* Alumina insulators are recommended with noble metal thermocouples. All noble metal elements have a butt-welded junction & are available in 20 ga. (.032"), 24 ga. (.020") and 30 ga. (.010").

#### Style NB – Noble Bare Thermocouple Wire

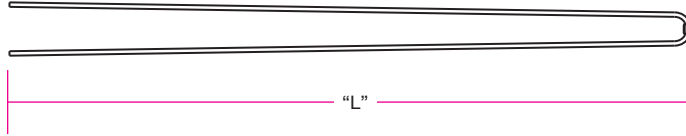


#### Ordering Information

Noble Metal Thermocouple Element Style NB is offered with the options listed below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

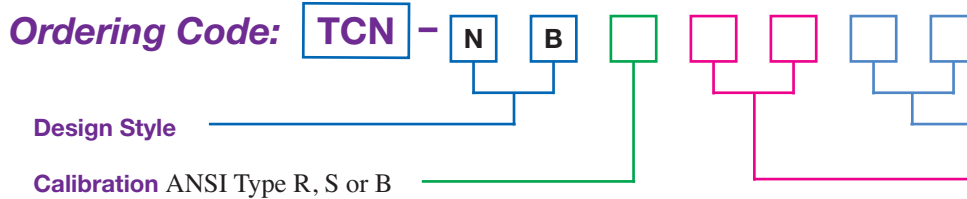


#### Style NZ – Noble Thermocouple Wire with 2-Hole Round Alumina Insulator

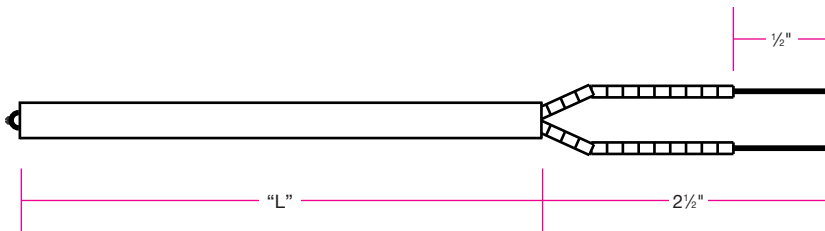

#### Ordering Information

Noble Metal Thermocouple Element with 2-hole Alumina insulator Style NZ is offered with the options listed below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

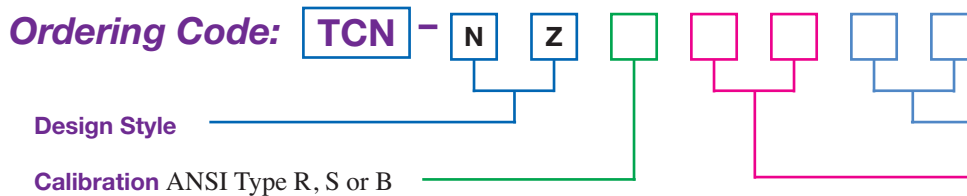

- 30 ga. Insulator P/N COR-124-105 and P/N CER-103-101 Ceramic Beads
- 24 ga. Insulator P/N COR-124-104 and P/N CER-103-101 Ceramic Beads
- 20 ga. Insulator P/N COR-124-106 and P/N CER-103-101 Ceramic Beads

\* See Page 14-96 for Insulator Dimensions \*

For Metal and Ceramic Protection Tubes  
see pages 14-85 and 14-86.

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**(800) 323-6859 • Email: [sales@tempco.com](mailto:sales@tempco.com)**