




### Style RTD2 — Plug or Jack Termination

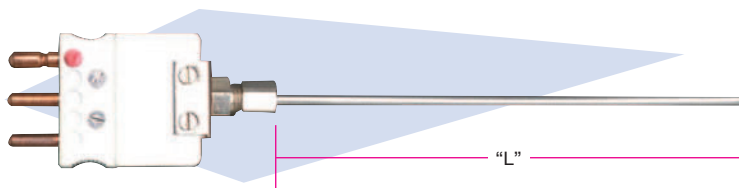

**Optional Installation  
Compression Fitting**  
See Box 10

### Ordering Information

RTDs are offered with the options listed in the worksheet below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

### Design Features

- \* *Platinum Resistance Element*
- \* *Available with standard or mini, 2- or 3-prong plug or jack*

### Two Construction Styles to Suit Any Application

(See Ordering Code Box 9)

- \* *Standard Industry Tube and Wire construction with fiberglass 900°F (482°C) or Teflon® 392°F (200°C) lead wires*
- \* *Mineral Insulated construction rated up to 1200°F (650°C). This construction type allows forming and bending the sheath to meet design requirements.*

**Ordering Code:** RTD2 -

#### Element BOX 1

**S** = 100Ω Single    **K** = 1000Ω Single  
**D** = 100Ω Dual    **L** = 1000Ω Dual  
*TCR = .00385 ohm/ohm/°C*

#### Sheath Length "L" BOX 6

Whole inches  
**01 to 99**  
 For lengths over 99 in. consult TEMPCO.

#### Sheath Length "L" BOX 7

Fractional inches  
**0** = 0"    **3** = 3/8"    **6** = 3/4"  
**1** = 1/8"    **4** = 1/2"    **7** = 7/8"  
**2** = 1/4"    **5** = 5/8"

#### Element Class BOX 2

**A** = ±0.06% at 0°C, Optional  
**B** = ±0.12% at 0°C, Standard

#### Termination BOX 8

**P** = Standard Male Plug 350°F (177°C)    **D** = Mini Male Plug 350°F (177°C)  
**J** = Standard Female Jack    **E** = Mini Female Jack  
**K** = Std. Plug with Mating Jack    **F** = Mini Plug with Mating Jack

#### Number of Leads BOX 3

**2** = 2-wire circuit  
**3** = 3-wire circuit (Dual circuit not available)

#### RTD Construction Type BOX 9

**Standard Industry Construction**  
**S** = Fiberglass insulated 900°F (450°C)  
**T** = Teflon® Insulated 392°F (200°C)  
**Mineral Insulated Construction**  
**M** = MgO Insulated 1200°F (650°C)  
 (Type "M" not available for "K" or "L" from Element Box 1)

#### Sheath O.D. BOX 4

**F** = 0.125" (Single Element Only)  
**G** = 0.188"  
**H** = 0.250"

#### Optional Compression Fitting BOX 10

**1** = 1/8" NPT SS    **4** = 1/8" NPT Brass  
**2** = 1/4" NPT SS    **5** = 1/4" NPT Brass  
**3** = 1/2" NPT SS    **6** = 1/2" NPT Brass  
**0** = None Required

#### Sheath Material BOX 5

**B** = 304 SS  
**C** = 316 SS  
**A** = Alloy 600  
 (Style M only; See Box 9)

#### Special Requirements BOX 11

**X** = Specify  
**0** = None

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**(800) 323-6859 • Email: [sales@tempco.com](mailto:sales@tempco.com)**