




Style RTD3 — Open Disc Termination

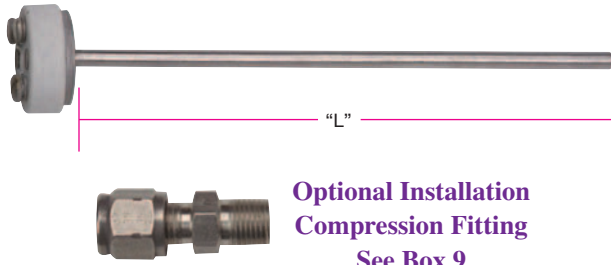

**Optional Installation
Compression Fitting**
See Box 9

Ordering Information

RTDs are offered with the options listed in the worksheet below. Create an ordering code by filling in the boxes with the appropriate number and/or letter designation for your requirements, and a part number will be assigned.

Design Features

- * *Platinum Resistance Element*
- * *Ceramic disc 1-1/8" O.D. for 2-, 3- and 4-wire designs, 2-1/32" O.D. for dual 6-wire design (.188" and .250" O.D. sheath); consult factory for 1/8" sheath O.D.*

Two Construction Styles to Suit Any Application

(See Ordering Code Box 8)

- * *Standard Industry Tube and Wire construction with fiberglass 900°F (482°C) or Teflon® 392°F (200°C) lead wires*
- * *Mineral Insulated construction rated up to 1200°F (650°C). This construction type allows forming and bending the sheath to meet design requirements.*

Ordering Code: **RTD3** -

Element BOX 1

S = 100Ω Single **K** = 1000Ω Single
D = 100Ω Dual **L** = 1000Ω Dual
TCR = .00385 ohm/ohm/°C

Sheath Length "L" BOX 6

Whole inches
01 to 99
 For lengths over 99 in. consult TEMPCO.

Element Class BOX 2

A = ±0.06% at 0°C, Optional
B = ±0.12% at 0°C, Standard

Sheath Length "L" BOX 7

Fractional inches
0 = 0" **3** = 3/8" **6** = 3/4"
1 = 1/8" **4** = 1/2" **7** = 7/8"
2 = 1/4" **5** = 5/8"

Number of Leads BOX 3

2 = 2-wire circuit
3 = 3-wire circuit
4 = 4-wire circuit
0.125" O.D. (Dual circuit not available)

RTD Construction Type BOX 8

Standard Industry Construction
S = Fiberglass insulated 900°F (450°C)
T = Teflon® Insulated 392°F (200°C)
Mineral Insulated Construction
M = MgO Insulated 1200°F (650°C)
 (Type "M" not available for "K" or "L" from Element Box 1)

Sheath O.D. BOX 4

F = 0.125"
G = 0.188"
H = 0.250"

Optional Compression Fitting BOX 9

1 = 1/8" NPT SS **4** = 1/8" NPT Brass
2 = 1/4" NPT SS **5** = 1/4" NPT Brass
3 = 1/2" NPT SS **6** = 1/2" NPT Brass
0 = None Required

Sheath Material BOX 5

B = 304 SS
C = 316 SS
A = Alloy 600
 (Type "M" Only; See Box 8)

Special Requirements BOX 10

X = Specify
0 = None

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.