


### Jack Panels for Standard 3-pin Connectors

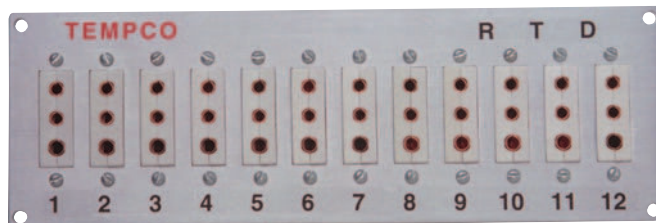

#### Standard Sizes

Part Number	Number of Rows	Panel Height H x L (in)	Number of Jacks	Cutout Size H x L (in)
JP(✚)00021	1	3½ x 5¼	6	2¾ x 4½ <sub>32</sub>
JP(✚)00022	2	6½ x 5¼	12	4¾ x 4½ <sub>32</sub>
JP(✚)00023	3	8½ x 5¼	18	7¾ x 4½ <sub>32</sub>
JP(✚)00024	4	11½ x 5¼	24	9¾ x 4½ <sub>32</sub>
JP(✚)00025	1	3½ x 9¾	12	2¾ x 8¾ <sub>32</sub>
JP(✚)00026	2	6½ x 9¾	24	4¾ x 8¾ <sub>32</sub>
JP(✚)00027	3	8½ x 9¾	36	7¾ x 8¾ <sub>32</sub>
JP(✚)00028	4	11½ x 9¾	48	9¾ x 8¾ <sub>32</sub>

✚ Insert calibration code (J, K, T, E, R, S, U) in Part Number, "U" is designated for RTDs and type B thermocouples.

#### Design Features:

- \* For use with RTDs and shielded thermocouples requiring 3 wires.
- \* Will accept standard 3-Pin connectors.
- \* Jack bodies are ANSI color coded, glass-filled nylon with a temperature rating of 350°F (177°C) continuous and 400°F (204°C) intermittent.
- \* Panels are manufactured of rugged .090" thick aluminum.
- \* Brushed and anodized finishes are available at an additional cost. Consult TEMPCO with your requirements.
- \* Panels are supplied unassembled for ease of wiring — all hardware necessary to assemble is included.



**Note:** Mounting Hole Spacing: 3/16" in from each side to center of 13/64" hole (for #10 screw)

### Jack Panels for Miniature 3-Pin Connectors



#### Standard Sizes

Part Number	Number of Rows	Panel Height H x L (in)	Number of Jacks	Cutout Size H x L (in)
JP(✚)00029	1	2½ <sub>16</sub> x 4¾	6	1¾ <sub>16</sub> x 4¾ <sub>32</sub>
JP(✚)00030	2	4½ <sub>16</sub> x 4¾	12	3¾ <sub>16</sub> x 4¾ <sub>32</sub>
JP(✚)00031	3	6½ <sub>16</sub> x 4¾	18	5¾ <sub>16</sub> x 4¾ <sub>32</sub>
JP(✚)00032	4	8½ <sub>16</sub> x 4¾	24	7¾ <sub>16</sub> x 4¾ <sub>32</sub>
JP(✚)00033	1	2½ <sub>16</sub> x 9	12	1¾ <sub>16</sub> x 8¾ <sub>32</sub>
JP(✚)00034	2	4½ <sub>16</sub> x 9	24	3¾ <sub>16</sub> x 8¾ <sub>32</sub>
JP(✚)00035	3	6½ <sub>16</sub> x 9	36	5¾ <sub>16</sub> x 8¾ <sub>32</sub>
JP(✚)00036	4	8½ <sub>16</sub> x 9	48	7¾ <sub>16</sub> x 8¾ <sub>32</sub>

✚ Insert calibration code (J, K, T, E, R, S, U) in Part Number, "U" is designated for RTDs and type B thermocouples

#### Design Features:

- \* For use with RTDs and shielded thermocouples requiring 3 wires.
- \* Complements modern miniature instrumentation.
- \* Jack bodies are ANSI color coded, glass-filled nylon with a temperature rating of 350°F (177°C) continuous and 400°F (204°C) intermittent.
- \* Panels are manufactured of rugged .090" thick aluminum.
- \* Brushed and anodized finishes are available at an additional cost. Consult TEMPCO with your requirements.
- \* Panels are supplied unassembled for ease of wiring—all hardware necessary to assemble is included.



**Note:** Mounting Hole Spacing: 3/16" in from each side to center of 13/64" hole (for #10 screw)