


*These Program-Qualified Lead Terminations and Options
for Stock Cartridge Heater Substrates
will ship 2nd or 3rd Day when ordered before 2PM (CST).*

Terminations


Type W

Straight Wire Braided Leads
(page 2-42)




Type M2A & M2E

Potted Lead End Seal
(Cement Only)
(page 2-40)




Type CMB & CMP

Single Threaded Fitting
(page 2-50)

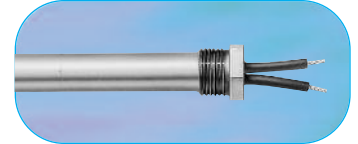


Type W1A & W1B

Right-Angle Wire
Braided Leads
(page 2-46)



Type C3A, C3B, C3C & C3D

Right-Angle Armor Cable
(page 2-47)



Type R2A & R2B

Right-Angle Leads
(page 2-45)



Options


Type R3

Angled Sheath Extension
(Cement Potting Only)
(page 2-53)



Type E1

General Purpose Box
(page 2-54)



Type GL

Ground Lead Sheath
(page 2-59)



*Complete specifications and details on these terminations can be
found on the specified catalog page numbers.*

**Custom
Manufactured**



Custom Engineered/Manufactured Hi-Density Cartridge Heaters

(Refer to pages 2-2 through 2-9)

Because cartridge heaters can be very application specific, consult Tempco with your special requirements. For sizes, electrical ratings and any other design features required but not listed in the catalog, Tempco will custom engineer and manufacture to your specifications.

Consult Us with Your Requirements. We Welcome Your Inquiries.