




Stock Square & Rectangular Silicone Rubber Heaters

Standard Smooth Silicone Rubber Heater

Heater with Pressure Sensitive Adhesive (PSA) Backing

Maximum Operating Temperature: 450°F (232°C)

Maximum Operating Temperature: 300°F (149°C)

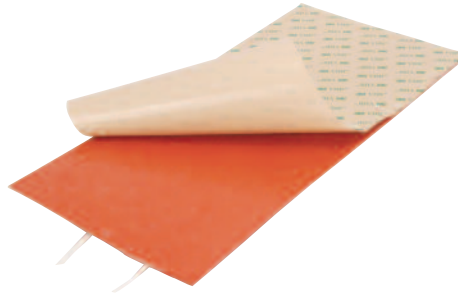

Use an appropriate method of temperature control to prevent heaters from exceeding maximum operating temperature. Reference Surface Temperature vs. Watt Density graph on page 9-5.



Stock Silicone Rubber Heaters — Standard Smooth and with Pressure Sensitive Adhesive Backing (PSA)

Silicone Rubber Heaters listed are 120 Volt and have 10" Teflon® Insulated Stranded Lead Wires exiting at Location A (see page 9-9).

Width		Length		Watts	Watt Density w/in ²	Part Number	
in.	mm	in.	mm			Standard (No PSA)	With PSA Backing
2	51	2	51	10	2.5	SHS80293	SHS80294
2	51	2	51	20	5	SHS80295	SHS80296
3	76	3	76	25	2.5	SHS80297	SHS80298
3	76	3	76	45	5	SHS80299	SHS80300
3	76	3	76	90	10	SHS80301	SHS80302
6	152	6	152	90	2.5	SHS80303	SHS80304
6	152	6	152	180	5	SHS80305	SHS80306
6	152	6	152	360	10	SHS80307	SHS80308
9	229	9	229	200	2.5	SHS80309	SHS80310
9	229	9	229	400	5	SHS80311	SHS80312
9	229	9	229	800	10	SHS80313	SHS80314
10	254	10	254	250	2.5	SHS80315	SHS80316
10	254	10	254	500	5	SHS80317	SHS80318
10	254	10	254	1000	10	SHS80319	SHS80320
12	305	12	305	360	2.5	SHS80321	SHS80322
12	305	12	305	720	5	SHS80323	SHS80324
12	305	12	305	1440	10	SHS80325	SHS80326
1	25	3	76	10	2.5	SHS80327	SHS80328
1	25	3	76	15	5	SHS80329	SHS80330
1	25	3	76	30	10	SHS80331	SHS80332
1	25	6	152	15	2.5	SHS80333	SHS80334
1	25	6	152	30	5	SHS80335	SHS80336
1	25	6	152	60	10	SHS80337	SHS80338
1	25	9	229	25	2.5	SHS80339	SHS80340
1	25	9	229	50	5	SHS80341	SHS80342
1	25	9	229	90	10	SHS80343	SHS80344
1	25	12	305	30	2.5	SHS80345	SHS80346
1	25	12	305	60	5	SHS80347	SHS80348
1	25	12	305	120	10	SHS80349	SHS80350
1	25	18	457	45	2.5	SHS80351	SHS80352
1	25	18	457	90	5	SHS80353	SHS80354
1	25	18	457	180	10	SHS80355	SHS80356
1	25	24	610	60	2.5	SHS80357	SHS80358
1	25	24	610	120	5	SHS80359	SHS80360
1	25	24	610	240	10	SHS80361	SHS80362
1	25	30	762	75	2.5	SHS80363	SHS80364
1	25	30	762	150	5	SHS80365	SHS80366
1	25	30	762	300	10	SHS80367	SHS80368

Width		Length		Watts	Watt Density w/in ²	Part Number	
in.	mm	in.	mm			Standard (No PSA)	With PSA Backing
1	25	48	1219	120	2.5	SHS80369	SHS80370
1	25	48	1219	240	5	SHS80371	SHS80372
1	25	48	1219	480	10	SHS80373	SHS80374
1	25	60	1524	150	2.5	SHS80375	SHS80376
1	25	60	1524	300	5	SHS80377	SHS80378
1	25	60	1524	600	10	SHS80379	SHS80380
1	25	72	1829	180	2.5	SHS80381	SHS80382
1	25	72	1829	360	5	SHS80383	SHS80384
1	25	72	1829	720	10	SHS80385	SHS80386
2	51	6	152	30	2.5	SHS80387	SHS80388
2	51	6	152	60	5	SHS80389	SHS80390
2	51	6	152	120	10	SHS80391	SHS80392
2	51	9	229	45	2.5	SHS80393	SHS80394
2	51	9	229	90	5	SHS80395	SHS80396
2	51	9	229	180	10	SHS80397	SHS80398
2	51	12	305	60	2.5	SHS80399	SHS80400
2	51	12	305	120	5	SHS80401	SHS80402
2	51	12	305	240	10	SHS80403	SHS80404
3	76	6	152	45	2.5	SHS80405	SHS80406
3	76	6	152	90	5	SHS80407	SHS80408
3	76	6	152	180	10	SHS80409	SHS80410
3	76	9	229	70	2.5	SHS80411	SHS80412
3	76	9	229	140	5	SHS80413	SHS80414
3	76	9	229	280	10	SHS80415	SHS80416
3	76	12	305	90	2.5	SHS80417	SHS80418
3	76	12	305	180	5	SHS80419	SHS80420
3	76	12	305	360	10	SHS80421	SHS80422
6	152	12	305	180	2.5	SHS80423	SHS80424
6	152	12	305	360	5	SHS80425	SHS80426
6	152	12	305	720	10	SHS80427	SHS80428
6	152	24	610	360	2.5	SHS80429	SHS80430
6	152	24	610	720	5	SHS80431	SHS80432
6	152	24	610	1440	10	SHS80433	SHS80434
9	229	12	305	270	2.5	SHS80435	SHS80436
9	229	12	305	540	5	SHS80437	SHS80438
9	229	12	305	1080	10	SHS80439	SHS80440
12	305	24	610	720	2.5	SHS80441	SHS80442
12	305	24	610	1440	5	SHS80443	SHS80444